

optibelt

Technical Manual



optibelt
V-Belts
Kraftbands

optibelt ALPHA
Timing Belts


optibelt OMEGA HL
optibelt OMEGA HP
optibelt OMEGA
Timing Belts

optibelt
Ribbed Belts
Ribbed Belt Pulleys

optibelt ZR
Timing Belts

optibelt

V-Belts • Kraftbands

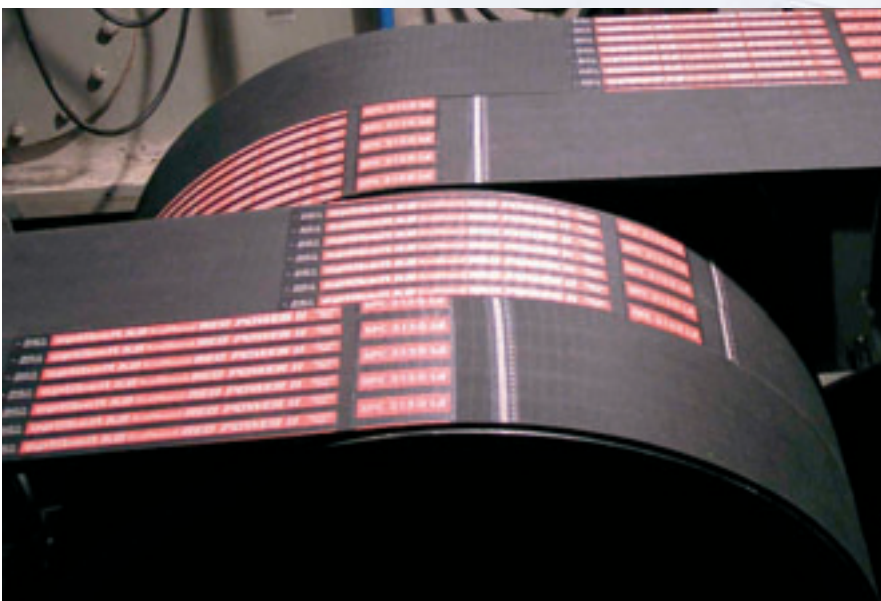

Drive solutions with Optibelt products



**Quality
is the result
of design
fuelled by intent.**



Power Transmission

Technical Manual for V-Belt Drives



This manual contains all the important technical information and methods required for calculating drives using Optibelt V-belts and pulleys in industrial applications.

The following drive elements from Optibelt’s comprehensive range are described in detail:

optibelt SK	Wedge belts
optibelt RED POWER II	High performance wedge belts, maintenance free
optibelt VB	Classical V-belts
optibelt SUPER TX M=5	V-belts – raw edge, moulded cogged
optibelt Super X-POWER M=5	High performance wedge belts – raw edge, moulded cogged, low maintenance
optibelt KB	Kraftbands with wedge belts and classical V-belts
optibelt KB RED POWER II	Kraftbands with high performance wedge belts, maintenance free
optibelt KBX	Kraftbands – raw edge, moulded cogged – with high performance wedge belts and classical V-belts
optibelt SUPER VX	Variable speed belts – raw edge, moulded cogged
optibelt SUPER DVX	Variable speed belts – raw edge, moulded double cogged
optibelt DK	Double section V-belts
optimat PKR	Endless V-belts and Optibelt KB kraftbands with patterned top surface
optibelt KK	Plastic V-beltting
optibelt RR	Plastic round section belting
optibelt KS	V-grooved pulleys
optibelt RE	Variable speed pulleys
optibelt TB	Taper bushes

Our engineers from the Applications Engineering Dept. will be pleased to provide advice free of charge on the use of these types of drives and to assist in designing to your specific requirements.

Especially for heavy duty, high performance drives we can produce optimum solutions using our state of the art CAP drive design programme.

Distribution Organisation North and South America / Asia

Canada
Optibelt (Canada) Inc.
351 Steelcase Road West Unit 8 & 9
Markham L3R 4H9, Ontario/Canada
Tel. +1-905-477-8114
Fax +1-905-477-0857
info@optibelt.ca

USA
Optibelt Corporation
1120 W. National Avenue
Addison, Illinois 60101/USA
Tel. +1-630-628-8400
Fax +1-630-628-6175
optibelt@msn.com

Brazil
Optibelt do Brasil Ltda.
Rua Henrique Monteiro Nr. 90
10 Andar-Pinheiros
CEP 05423-020 São Paulo-SP/Brasil
optibeltbrasil@optibelt.com

Singapore
Optibelt Asia Pacific Pte. Ltd.
No. 4 Loyang Way 1, # 01-02/03
Singapore 508708
Tel. +65-6545 4682
Fax +65-6545 4685
sales@optibelt.com.sg

China
Optibelt Power Transmission (Shanghai) Co., Ltd.
55 Miaosan Road, Songjiang District
Shanghai 201612/P.R. China
Tel. +86-21-5768 7465
Fax +86-21-5768 7462
sales@optibelt.com.cn

Manufacturing and Distribution Organisation of the Arntz Optibelt Group

A & M Belting Company Ltd.
Ballyraine Industrial Estate
**Letterkenny Co. Donegal
Ireland**
Tel. +353-7491-25066
Fax +353-7491-25061
a+m@optibelt.com

Arntz Belting Company Ltd.
Pennyburn Pass
**Londonderry BT48 0AE
Northern Ireland**
Tel. +44-2871-26 1221
Fax +44-2871-26 3386
abc@optibelt.com

Distribution Organisation Germany

Northern Sales Office
Corveyer Allee 15
D-37671 Hötter
Tel. +49 (0) 5271 - 6 23 03
Fax +49 (0) 5271 - 97 62 00

Southern Sales Office
Pfauhauser Straße 43
D-73240 Wendlingen
Tel. +49 (0) 7024 - 71 00
Fax +49 (0) 7024 - 52792

Spain
Optibelt España, S.A.
Apartado 1141
Rois de Corella, 12
E-08205 Sabadell
Tel. +34-93-7207960
Fax +34-93-711 6490
administracion@optibelt.net

Finland
Optibelt Finland Oy
PL 58
Lampputie 4
FIN-00751 Helsinki
Puh. +358-9-3461400
Faksi +358-9-3461500
optibelt@co.inet.fi

Scandinavia
Optibelt Skandinaviska AB
Stadiongatan 60
S-21762 Malmö
Tel. +46-40-592120
Fax +46-40-499010
optibelt@optibelt.se

United Kingdom
Optibelt (UK) Ltd.
5 Bishops Court
Winwick Quay
GB-Warrington WA2 8QY
Cheshire
Tel. +44-870-4288800
Fax +44-1925-573751
optibelt@optibeltuk.co.uk

Netherlands
Optibelt Nederland B.V.
Haarlemmerstraat 28
NL-2181 HC Hillegom
Tel. +31-252-528283
Fax +31-252-534735
info@optibelt.nl

Belgium
Optibelt GmbH
Filiaal België
Draiboornstraat 6 bus 8
B-2160 Wommelgem
Tél. +32-3-3252275
Fax +32-3-3260955
optibelt@skynet.be

France
Optibelt France SAS
54, Rue de la Gare
B.P. N° 13
F-68520 Burnhaupt-le-Haut
Tél. +33-3-89627510
Fax +33-3-89627519
optibelt-france@optibelt.fr

Transac S.A.
54, Rue de la Gare
F-68520 Burnhaupt-le-Haut
Tél. +33-3-89627520
Fax +33-3-89627529

Switzerland
Optibelt AG
Bodenackerstrasse 70
CH-4657 Dulliken
Tel. +41-62-2855000
Fax +41-62-2855001
vertrieb@optibelt.ch

Austria
Optibelt Österreich GmbH
Carlberggasse 38
A-1230 Wien
Tel. +43-1-8654397
Fax +43-1-8654396
office@optibelt.at

South East Europe
Optibelt GmbH
Südost-Europa · Office Wien
Carlberggasse 38
A-1230 Wien
Tel. +43-1-865310019
Fax +43-1-865310027
office@optibelt.at

Ungarn
Optibelt Hungary Kft.
Szegedi utca 1 – 5
H-6792 Zsombó
Tel. +36-62-595275
Fax +36-62-255275
info@optibelt.hu

Italy
Optibelt AG
Via Dandolo, 1
I-20025 Legnano (Mi)
Tel. +39-0331-481020
Fax +39-0331-481075
optibeltitalia@libero.it

Arntz Optibelt GmbH
Postfach 100132 · **D-37669 Hörter**
Corveyer Allee 15 · **D-37671 Hörter**
Tel. +49 (0)5271-621
Fax +49 (0)5271-976200

Optibelt GmbH
Postfach 100132 · **D-37669 Hörter**
Corveyer Allee 15 · **D-37671 Hörter**
Tel. +49 (0)5271-621
Fax +49 (0)5271-976200

Optibelt Produktions GmbH & Co. KG
Carl-Vollrath-Straße 4
D-07422 Bad Blankenburg
Tel. +49 (0)36741-4830
Fax +49 (0)36741-42101

Poland
Optibelt Polska Sp. z o.o.
ul. Budowlanych 11
PL-41-303 Dąbrowa Górnicza
Tel. +48-32-2601175/76
Faks +48-32-2604208
biuro@optibelt.net.pl

Russian Federation
OOO „Optibelt Power Transmission“
Ul. Professionalnaja 151
141806 Dmitrow
Tel. +7 (495) 7273763, 7273764
Fax +7 (495) 7273765
info@optibelt.ru

Table of Contents



Product description Drive belts

Optibelt SK wedge belts	6-7
Optibelt RED POWER II high performance wedge belts	8
Optibelt VB classical V-belts	9
Optibelt SUPER TX M=S V-belts – raw edge, moulded cogged	10
Optibelt Super X-POWER M=S – raw edge, moulded cogged	11-12
Optibelt KB Kraftbands	13-14
Optibelt Super VX and Super DVX variable speed belts – raw edge, moulded cogged / double cogged	15
Optibelt DK double section V-belts	16
Standard properties	17
Special constructions	18

Product description Drive belts

Optibelt SK wedge belts Sections SPZ, SPA, SPB, SPC, 3V/9N, 5V/15N, 8V/25N	19-20
Optibelt RED POWER II, high performance wedge belts, Sections 3V/9N, 5V/15N, 8V/25N, SPZ, SPA, SPB, SPC	21-22
Optibelt VB classical V-belts Sections 5, Y/6, 8, Z/10, A/13, B/17, 20, C/22, 25, D/32, E/40	23-27
Optibelt Super X-POWER M=S wedge belts, SUPER TX M=S V-belts Sections XPZ, XPA, XPB, XPC, 3VX/9NX, 5VX/15NX, ZX/X10, AX/X13, BX/X17, CX/X22	28-29
Optibelt KB Kraftbands with wedge belts, Sections SPZ, SPA, SPB, SPC, 3V/9J, 5V/15J, 8V/25J – Optibelt KBX Kraftbands with moulded cogged, raw edge wedge belts, Sections 3VX, 5VX – Optibelt KB Kraftbands with classical V-belts A/HA, B/HB, C/HC, D/HD	30-33
Optibelt RED POWER II Kraftbands with high performance wedge belts, Sections SPB, SPC, 3V/9J, 5V/15J, 8V/25J	34-35
Optibelt SUPER VX moulded cogged, raw edge variable speed belts	36-37
Optibelt DK double section V-belts Sections AA/HAA, BB/HBB, CC/HCC, DD/HDD, 22 x 22, 25 x 22	38

Product description Metal

Optibelt KS V-grooved pulleys, Optibelt TB taper bushes, Optibelt RE variable speed pulleys	39
Optibelt KS V-grooved pulleys, types	40
Optibelt pulleys – standards – design criteria – types	41

Product description Metal

Optibelt V-grooved pulleys for wedge belts and classical V-belts.....	42-43
Optibelt V-grooved pulleys USA Standard for wedge belts	44
Optibelt V-pulleys for kraftbands	45-46
Optibelt deep grooved pulleys.....	47
Optibelt KS V-grooved pulleys for taper bushes	48-56
Optibelt KS V-grooved pulleys for plain boring	57-62
Optibelt RE variable speed pulleys	63-65
Optibelt TB Taper bushes	66

Table of Contents



Drive calculations	Drive calculation67-78
	Formulae and calculation examples79-81
	Drive calculation using the Optibelt CAP computer programme 82
Power ratings	Optibelt SK83-87
	Optibelt RED POWER II88-92
	Optibelt Super X-POWER M=S, SUPER TX M=S93-100
	Optibelt VB101-111
Special drives	V-flat drives112-114
	Tension/Guide idlers115-117
	Twist drives.....118-120
	Drive belts with Aramid tension cord121-122
Design hints	Belt tension for Optibelt V-belts and kraftbands123-127
	Calculating the axial force 128
	Assistance with tensioning129-130
	Installation, maintenance and storage131-135
	Physical properties136-139
	Problems – causes – remedies140-141
	Length measurement conversion and conditions factors, length tolerances142-146
	Conversion factors147-148
Special purpose conveyor belts	Product description 149
	Design guidelines 150
	Optibelt KB Kraftbands with patterned top surface 150
	Optibelt PKR endless V-belts and Optibelt KB Kraftbands with patterned top surface 151
	Optimat PKR open ended V-belting according to DIN 2216 with patterned top surface..... 152
	Optibelt RR plastic round section belting 153
	Optibelt KK plastic V-belting and plastic V-belting with special top surface..... 153
Annex	Table of standards..... 154
	Data sheet for calculating/checking drives157-158
	Data sheet for calculating/checking conveyor systems159-160

Standard Range


optibelt SK Wedge Belts to BS 3790

DIN 7753 Part 1



Construction

Optibelt SK wedge belts consist of

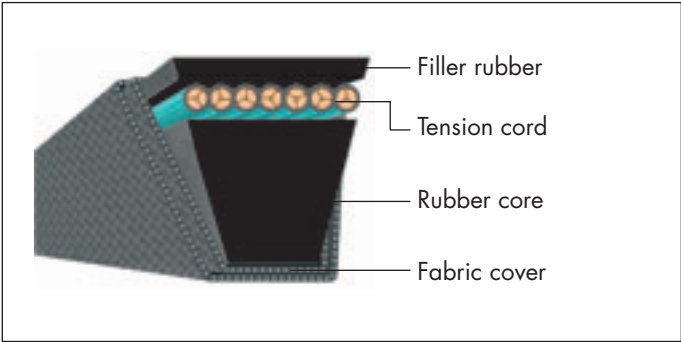

The base and filler rubbers are extruded to precise profile dimensions and weight per unit length to give a better fit in the pulley grooves and vibration free running.

Polyester tension cord is standard, with yarn constructions matched to section. The cord is specially impregnated and then encapsulated in a special rubber compound to give a perfect bond to the base and filler rubber. In addition the cord is pre-stretched prior to building into the belt to give lower stretch characteristics on the drive. Due to the special pretreatment the Optibelt SK high performance wedge belt has lower stretch characteristics. As a result, we were able to reduce significantly our recommended minimum allowances for drive centre adjustment, compared to those specified in BS/DIN/ISO.

The fabric cover is treated with a wear resistant rubber compound. This renders the belt resistant to oil, heat and cold and to the effects of dust.

Properties

Optibelt SK wedge belts are the result of intensive product and material development. The use of the best materials and the most advanced production methods, backed up by the most modern static and dynamic test equipment ensures that the finished product is a most efficient method of transmitting power.

Optibelt SK wedge belts differ from classical V-belts as follows:

- Considerable reduction in cross sectional area for similar power transmission capability (belt width to height ratio approx. 1:1.2). This allows substantial savings in pulley face widths and therefore costs.
- Lower comparative belt weight per unit length and consequently lower centrifugal force permits belt speeds of up to 42 m/sec.
- Greater flexibility permits higher flexing rates ($f_{B\max} \approx 100\text{ s}^{-1}$).
- Greater surface area relative to belt section ensures better heat dissipation.
- Less deformation of the belt cross section when in contact with the pulley, therefore better contact between the belt edges and the pulley grooves.

All these properties result in a performance significantly higher than that of classical V-belts with approximately the same top widths. Therefore Optibelt SK wedge belts should be used on all new drive designs.

Applications

Optibelt SK wedge belts with the sections SPZ, SPA, SPB and SPC were specially developed for all industrial applications from lightly loaded drives, such as those for pumps, to heavily loaded stone crusher drives.

Standards/Dimensions

Optibelt SK wedge belts SPZ, SPA, SPB and SPC conform to BS 3790, DIN 7753 Part 1 and ISO 4184.

British, German and ISO standards specify the datum width as a basis for the standardisation of V-belts and grooves. This is the width of a V-belt that remains unchanged when the belt is bent perpendicular to the base of its cross section. The datum length L_d of the belt is the length measured at the position of the datum width and is the basis of standardisation.

Optibelt offers a more comprehensive range of belt sections and lengths than those included in any individual standard.

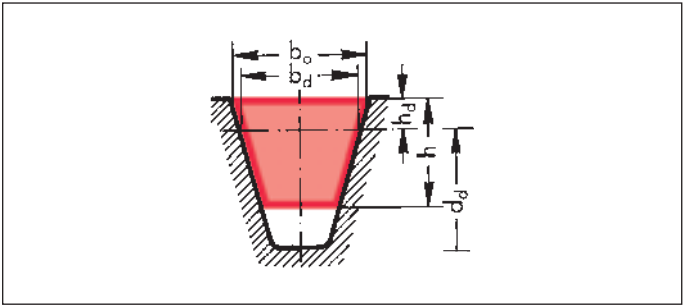


Table 1

Section		SPZ	SPA	SPB	SPC
Belt top width	$b_o \approx$	9.7	12.7	16.3	22
Datum width	$b_d \approx$	8.5	11	14	19
Belt height	$h \approx$	8	10	13	18
Distance down to datum line	$h_d \approx$	2	2,8	3,5	4,8
Recommended minimum pulley datum diameter	$d_{d\min}$	63	90	140	224
Belt weight (kg/m)	$\approx$	0.074	0.123	0.195	0.377
Max. flexing rate (s^{-1})	$f_{B\max} \approx$	100			
Max. belt speed (m/s)	$v_{\max} \approx$	55*			

* When $V > 42\text{ m/sec}$. Please consult our Applications Engineering Dept.

Standard Range


optibelt SK Wedge Belts

to USA Standard RMA/MPTA



Construction/Properties

Optibelt SK wedge belts to USA Standard RMA/MPTA have the same construction and properties as wedge belts to BS 3790 and DIN 7753 Part 1.

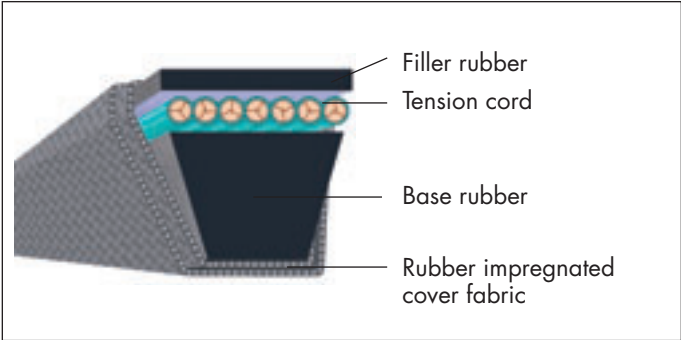

Standardisation/Dimensions

The three wedge belt sections standardised in the USA are 3V/9N, 5V/15N and 8V/25N. The cross section dimensions of these belts and the lengths by which they are identified are not in accordance with BS 3790 or DIN 7753.

The section 3V/9N roughly corresponds to SPZ; and 5V/15N to the section SPB. There is no comparable BS/DIN/ISO wedge belt section for 8V/25N. It is possible to use belts of 3V/9N and 5V/15N section in SPZ-Z/10 or SPB-B/17 pulleys, respectively; but the use of SPZ or SPB belts in RMA/MPTA standard pulleys is not normally recommended. The top widths of the American pulley grooves are narrower than those of the corresponding BS/DIN/ISO pulleys. This can cause wear on the upper edges of SPZ and SPB section belts and can lead to premature failure.

Optibelt SK wedge belts in SPB section have been so designed that they are also suitable for use with 5V/15N pulleys.

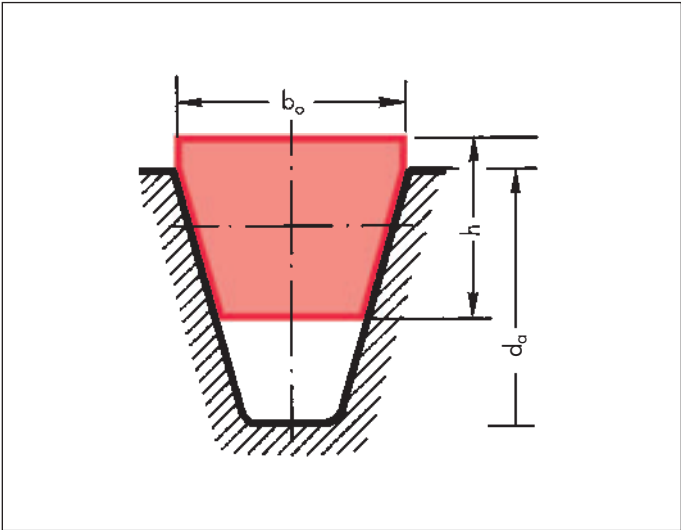


Table 2

Section		3V/9N	5V/15N	8V/25N
Belt top width	$b_o \approx$	9	15	25
Belt height	$h \approx$	8	13	23
Recommended minimum pulley datum diameter	$d_{a \min}$	63	140	335
Belt weight (kg/m)	$\approx$	0.074	0.195	0.575
Max. flexing rate per sec.	$f_B \max \approx$	100		
Max. belt speed (m/s)	$v_{\max} \approx$	55*		

* When $V > 42$ m/sec. Please consult our Applications Engineering Dept.

The belt length designation refers to the effective outside length.

Example:

Inch designation	Metric designation
3V 750	9N 1905
3V = belt top width (3/8")	9 $\approx$ belt top width (9 mm)
750 = outside length in inches x 10	N = designation for single V-belt
Outside length in mm:	1905 = effective outside length in mm (1 inch = 25.4 mm)
$L_a = \frac{750 \cdot 25.4}{10}$	
$L_a = 1905$ mm	

Applications

The use of Optibelt SK wedge belt drives in sections 3V/9N and 5V/15N is recommended for machines exported to countries such as the USA and Canada where these belt sections are standardised and used predominantly.

Section 8V/25N is primarily employed in very heavy duty drives such as mills or stone crushers. As these wedge belts transmit very high levels of power, they can sometimes form a more compact drive than the SPC section.

For this reason, the 8V/25N section has continued to be used in Europe for such applications. A further advantage is the fact that single wedge belts can be replaced by kraftbands, without changing the pulley geometry, should unexpected belt vibration problems develop.

Drive Calculation

Drive calculations follow procedures described in this manual. Power ratings for 3V/9N and 5V/15N sections are the same as those for SPZ and SPB sections respectively but, for 3V/9N and 5V/15N the pulley outside diameter is the basis for calculation, not the pitch or datum diameter. Slight differences in the theoretical drive speed and the speed ratio are not significant in practice.


Standard Range

optibelt RED POWER II High Performance Wedge Belts



Construction

Optibelt RED POWER II wedge belts.

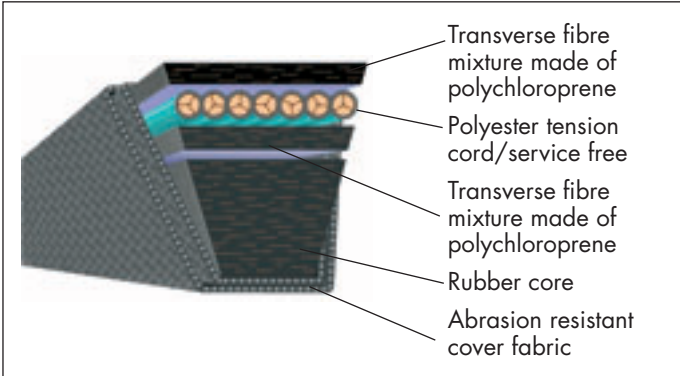

The tension cord for all sections and cross sections consists of a special polyester cord. Due to the special treatment of the tension cord the Optibelt RED POWER II wedge belt is very low stretch and service free, so that retensioning is not necessary.

The fibre mixture over and under the tension cord guarantees highly dynamic load of the belt and provides good flexibility in combination with the polyester tension cord.

The cover fabric is extremely wear resistant, flexible and abrasion proof.

Properties

The high-quality components in connection with product manufacturing make the Optibelt RED POWER II a maintenance free V-belt. Production is continuously monitored using state-of-the-art static and dynamic testing devices.

Application with drives using idler pulleys is possible due to the special construction of the Optibelt RED POWER II.

Its properties:

- maintenance free
- improved power rating
- cost effective
- SetConstant
- environmentally friendly

Optibelt RED POWER II are oil resistant, heat resistant and dust protected as standard

The anti-static properties of Optibelt RED POWER II should be confirmed by testing these properties according to ISO 1813. With our acceptance test certificate to EN 10204 “3.1.B” we show proof of the anti-static properties.

V-belt tensioning


For the initial fitting of Optibelt RED POWER II the same calculation methods are used as for standard Optibelt V-belts. The tensioning values are to be calculated on the same basis or to be taken from the table on page 130. Once correctly tensioned Optibelt RED POWER II V-belts need no retensioning.

Applications

Optibelt RED POWER II wedge belts were especially developed for mechanical engineering. The fields of application are among others compressors, pumps, presses, fans and other heavy duty drives.

Standardisation/Dimensions

Optibelt RED POWER II wedge belts with the sections SPZ, SPA, SPB, SPC, 3V/9N, 5V/25N are standardised according to BS 3790, DIN 7753 Part 1, ISO 4184 and RMA/MPTA.

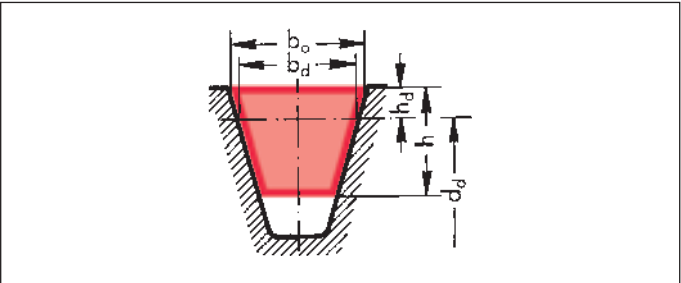

Section		SPZ	SPA	SPB	SPC
Belt top width	$b_o \approx$	9.7	12.7	16.3	22
Datum width	b_d	8.5	11	14	19
Belt height	$h \approx$	8	10	13	18
Distance down to datum line	$h_d \approx$	2	2.8	3.5	4.8
Recommended minimum pulley datum diameter	$d_{d \min}$	63	90	140	224
Belt weight (kg/m)	$\approx$	0.074	0.123	0.195	0.377
Maximum flex rate (per sec.)	$f_{B \max} \approx$	100			
Maximum belt speed (m/s)	$v_{\max} \approx$	55*			

* When $V > 42$ m/sec. Please consult our Applications Engineering Dept.

Section		3V/9N	5V/15N	8V/25N
Belt top width	$b_o \approx$	9	15	25
Belt height	$h \approx$	8	13	23
Recommended minimum pulley datum diameter	$d_{a \min}$	63	140	335
Belt weight (kg/m)	$\approx$	0.074	0.195	0.575
Max. flexing rate per sec.	$f_{B \max} \approx$	100		
Max. belt speed (m/s)	$v_{\max} \approx$	55*		

* When $V > 42$ m/sec. Please consult our Applications Engineering Dept.

Standard Range


optibelt VB Classical V-Belts

to BS 3790 and DIN 2215



Construction/Properties

Optibelt VB classical V-belts are manufactured using the same production processes as those for Optibelt SK wedge belts.

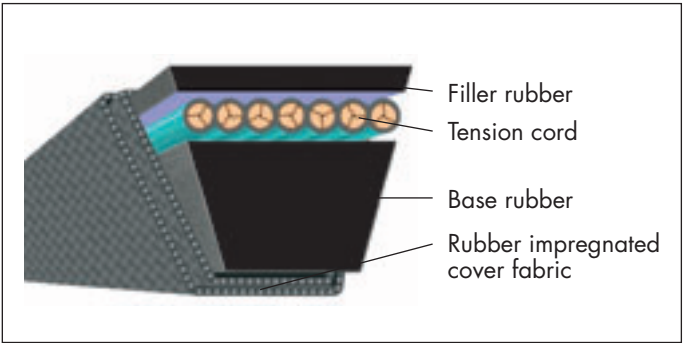

The components used are perfectly suited to the power ratings PN shown in later tables. These values are significantly higher than those quoted in BS 3790 or DIN 2218 and therefore offer a greater factor of safety on critical drives.

- Optibelt VB classical V-belts have a belt width to belt height ratio of approx. 1:1.6.
- The maximum belt speed $v_{max} \approx 30$ m/s should not be exceeded.
- The permissible flexing rate is considerably lower than that for wedge belts, at $f_{B\ max} \approx 80$ per second.

Applications

Optibelt VB classical V-belts are employed primarily as replacements on industrial drives. For new drives, it is almost always recommended that wedge belts be specified for reasons of space and cost. However, special drives, such as V-flat, often can only use classical V-belts. Similarly, difficult drives for agricultural and horticultural machinery are often unsuitable for wedge belts by virtue of the use of small pulleys or back bend idlers. For these applications special belt constructions may be necessary. It is not possible within this Manual to describe all of the special constructions or the calculation data applicable to them. It is therefore requested that all details of such drives are forwarded to our Applications Engineering Department for calculation and recommendation.

Standardisation/Dimensions

Optibelt VB classical V-belts sections Y/6, Z/10, A/13, B/17, C/22, D/32 and E/40 are standardised according to DIN 2215 and ISO 4184.

The Optibelt range also includes sections 5, 8, 20 and 25 from an earlier edition of DIN 2215. These sections should, where possible, be avoided on replacement and rationalisation grounds.

The British and ISO Standards specify the datum length for measuring and identifying the belt length. The datum length is the circumferential length of the belt measured at a datum width b_d . The earlier DIN standard length designation using the inside length L_i is replaced by the datum length L_d . For the conversion factors from pitch to inside length, please see page 143.

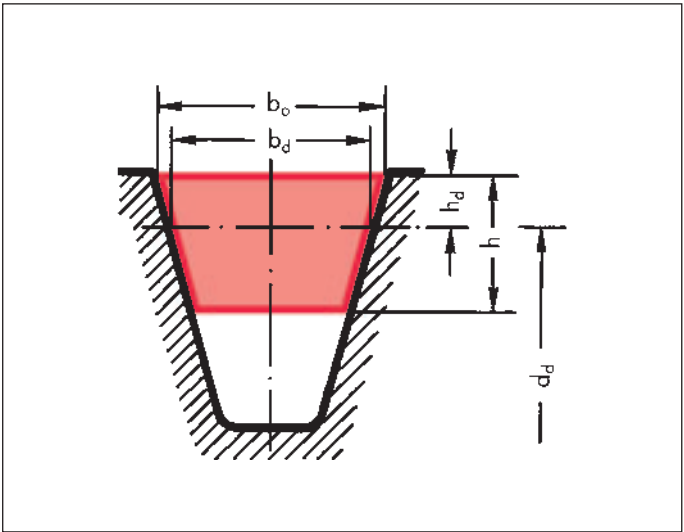


Table 3

Section	DIN 2215	(5)	6	(8)	10	13	17	(20)	22	(25)	32	40
	BS 3790/ISO 4184	–	Y	–	Z	A	B	–	C	–	D	E
Belt top width	$b_o \approx$	5	6	8	10	13	17	20	22	25	32	40
Datum width	b_d	4.2	5.3	6.7	8.5	11	14	17	19	21	27	32
Belt height	$h \approx$	3	4	5	6	8	11	12.5	14	16	20	25
Distance down to datum line	$h_d \approx$	1.3	1.6	2.0	2.5	3.3	4.2	4.8	5.7	6.3	8.1	12
Recommended minimum pulley datum diameter	$d_{d\ min}$	20	28	40	50	71	112	160	180	250	355	500
Belt weight (kg/m)	$\approx$	0.018	0.026	0.042	0.064	0.109	0.190	0.266	0.324	0.420	0.690	0.958
Max. flexing rate (per sec.)	$f_{B\ max} \approx$	80										
Max. belt speed (m/s)	$v_{max} \approx$	30										

Standard Range

optibelt *SUPER TX M=S* raw edge, moulded cogged – BS/DIN/ISO, RMA/MPTA



The advantages of the Optibelt *SUPER TX M=S* V-belts are evident where –


- extremely small pulley diameters
- high belt speeds
- extraordinary power transmission requirements
- high ambient temperatures

render the use of wrapped V-belts uneconomical and impractical.

Optibelt *SUPER TX M=S* V-belts sections XPZ, XPA, XPB, XPC, 3VX/9NX, 5VX/15NX, ZX/X10, AX/X13, BX/X17 and CX/X22 offer the best technical and economic solutions for these conditions through their use of high grade components coupled to the most advanced production machinery.

Construction/Properties

Optibelt *SUPER TX M=S* belts consist of

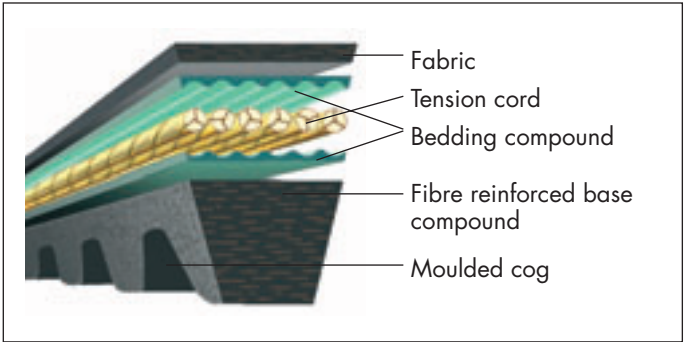

The base compound consists of a polychloroprene rubber mixture filled with fibres arranged to lie across the belt section. These provide an effective support to the tension cord.

The result is

- very high flexibility
- high transverse stiffness
- considerably increased abrasion/wear resistance and
- insensitivity to slip

The use of a new type of polyester cord, specially developed Optibelt *SUPER TX M=S* V-belts imparts

- remarkably low stretch properties

to the belt.

This specially designed tension cord is securely locked into the bedding compound. Perfect adhesion between the components is ensured even under the highest dynamic loading conditions.

The fabric layers at the top of the belt support the tension cord and contribute to the


- greater belt flexibility.

The fibre reinforced base compound, in conjunction with the Optibelt tension cord and the moulded cog, offers increased and more efficient transmission of power.

The moulded cogs reduce bending stress and give outstanding flexibility. As a result, significantly smaller pulleys than those used with conventional fabric wrapped V-belts can be employed.

With Optibelt *SUPER TX M=S* V-belts drive ratios (*i*) of up to 12 to 1 are possible.

Multi-stage drives can be eliminated.

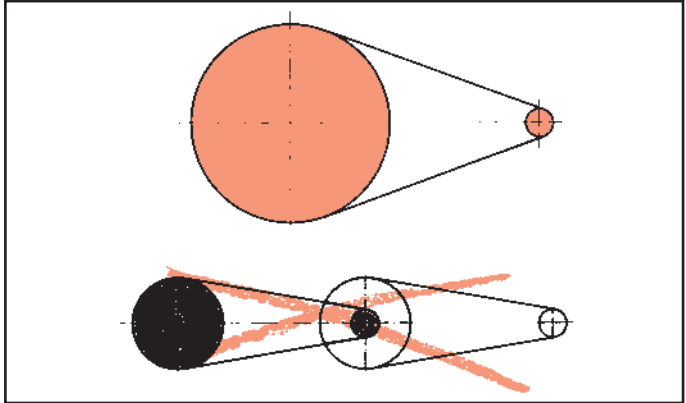

Optibelt *SUPER TX M=S* V-belts are more heat and oil resistant than wrapped V-belts as new, high quality rubber compounds are used.

Weight and space requirements are reduced by their ability to transmit higher power even with small diameter pulleys often resulting in a

- significant reduction in cost.

Drive Calculation

Drive designs using Optibelt *SUPER TX M=S* belts should be undertaken following the example given on pages 79 to 81. The higher power ratings given in the relevant tables, apply. These are based on a theoretical laboratory running time of 25,000 hours.

Pulleys

Optibelt *SUPER TX M=S* V-belts are used with pulleys to BS 3790, DIN 2211, DIN 2217, ISO 4183 and RMA/MPTA. Considerably smaller minimum pulley datum diameters are acceptable.

Table 4

Recommended minimum pulley diameters (mm) V-belts					
Section	raw edge, moulded cogged	Section	wrapped		
ZX/X10	40	Z/10	50		
AX/X13	63	A/13	71		
BX/X17	90	B/17	112		
CX/X22	140	C/22	180		
Section	Belt top width $b_o \approx$	Datum width b_d	Belt height $h \approx$	Distance down to datum line $h_d \approx$	Belt weight (kg/m) $\approx$
ZX/X10	10	8.5	6	2.5	0.062
AX/X13	13	11	8	3.3	0.099
BX/X17	17	14	11	4.2	0.165
CX/X22	22	19	14	5.7	0.276

Standard Range

optibelt Super X-POWER M=S

raw edge, moulded cogged – BS/DIN/ISO, RMA/MPTA



Power Transmission

Advantages

Super X-POWER M=S wedge belts are ideally used in the following conditions

- extremely small pulley diameters
- higher rotational speeds
- higher ambient temperatures.

Super X-POWER M=S wedge belts offer


- higher power transmission
- minimal belt stretch
- much longer service intervals – maintenance free
- superior running characteristics – smoother running
- outstanding heat and oil resistance
- formation of sets without measurement, M=S

Drive ratios $i = 1:12$ are possible with Super X-POWER.

Multi-stage drives can be eliminated.

Optibelt Super X-POWER M=S wedgebelt in sections XPZ, XPA, XPB, XPC, 3VX/9NX and 5VX/15NX, because of the use of the best materials and manufacturing techniques, offer ideal solutions to many drive problems.

The special tension cord and the optimum cog shape enable higher dynamic and load transmission capabilities, improved bending stress and a higher temperature resistance.

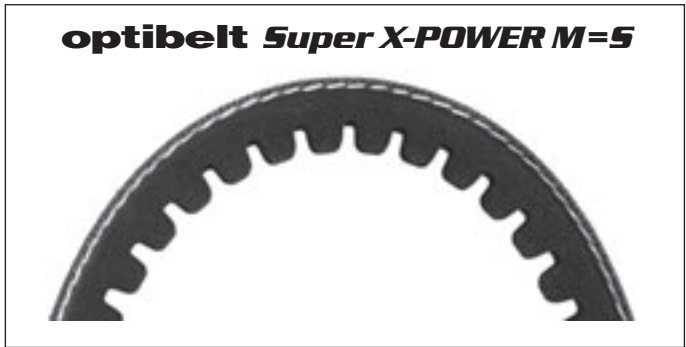


Because of the possibilities of greater power transmission, smaller pulley diameters and higher motor speeds it is often possible to reduce drive space and weight and thus permit

- significant drive cost reductions

Construction/Characteristics

Optibelt Super X-POWER M=S consist of:

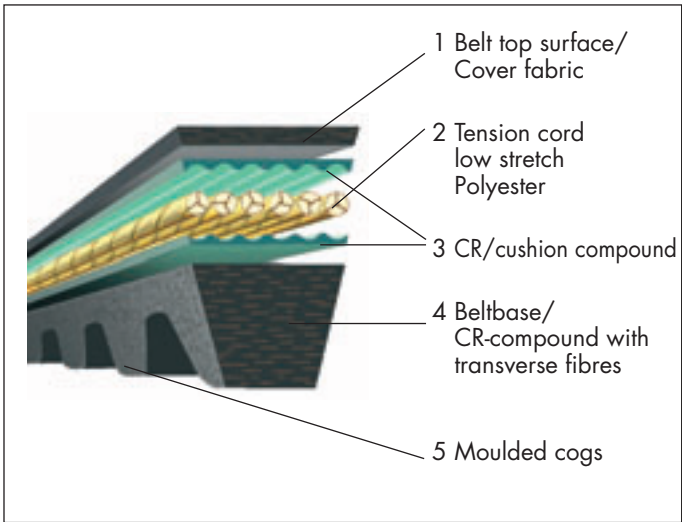

1. The special Polyester-tension cord of Super X-POWER M=S has an extremely low stretch and enables maintenance free drives.
2. The structure of the cover fabric offers support to the tension cord without impairing the very high flexibility of the Super X-POWER.
3. The belt base structure consists of a high performance Chloroprene compound incorporating transversely oriented fibres for strength with no loss of flexibility and yet smooth and quiet running characteristics.

Applications

Machinery:

- compressors
- fans
- road making equipment
- pumps
- wood working machines
- high performance saws
- special machines

Machine tools:


- milling and drilling machines
- grinding machinery
- lathes

The use of Optibelt Super X-POWER M=S is recommended on drives where wrapped belts may be borderline for any one of a variety of reasons i.e. power, pulley diameter, ambient temperature etc.

Standard Range

optibelt Super X-POWER M=S

- raw edge, moulded cogged - BS/DIN/ISO, RMA/MPTA

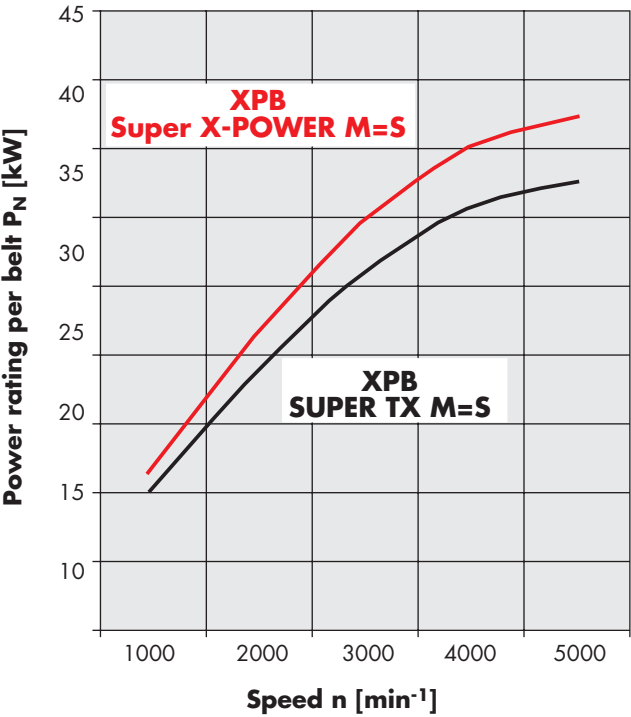

Drive Calculation

Drive design using Optibelt Super X-POWER M=S belts should be undertaken following the example given on pages 78 to 80. The higher power ratings given in the relevant tables, apply. These are based on a theoretical laboratory running time of 25,000 hours.

Standardisation/Dimensions

The cross sections and dimensions of Optibelt Super X-POWER M=S V-belts correspond to BS 3790:1981, DIN 7753 Part 1, DIN 2215, ISO 4184 and RMA/MPTA.

The basis for the length measurement is the datum length (L_d) to BS/DIN/ISO.

Table 5

Section	Belt top width $b_o \approx$	Datum width b_d	Belt height $h \approx$	Distance down to datum line $h_d \approx$	Belt weight (kg/m) $\approx$
XPZ	9.7	8.5	8	2	0.065
XPA	12.7	11	10	2.8	0.105
XPB	16.3	14	13	3.5	0.183
XPC	22	19	18	4.8	0.340
3VX/9NX	9	—	8	—	0.065
5VX/15NX	15	—	13	—	0.183

Belt Tension / Static Shaft Loading


Belt tension and static shaft loading are calculated as for wrapped belts. The shaft loading is usually no greater than that for the same drive using wrapped belts. It is often possible, due to a reduction in the number of belts used, that the shaft loading could be lower. The individual Super X-POWER M=S belt requires a higher tension than the wrapped belt in order to utilise its greater power transmission capability.

The precision ground sides of the Optibelt Super X-POWER M=S V-belts ensure uniform seating in the pulley grooves, resulting in smoother running.

Test Results

Optibelt Super X-POWER M=S exhibit a considerably improved tension retention when compared to the earlier raw edge, moulded cogged construction.

Comparison test: **Tension retention (N)**,
Power $P = 13,0 \text{ kW}$, $n_1 = 4700 \text{ min}^{-1}$

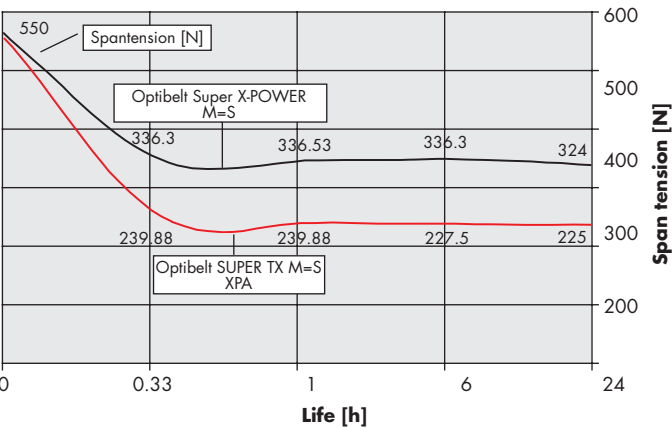

Pulleys

Optibelt Super X-POWER M=S are used with pulleys to BS 3790, DIN 2211, DIN 2217, ISO 4183 and RMA/MPTA. Considerably smaller minimum pulley datum diameters are acceptable.

Table 6

Recommended minimum pulley diameters (mm) wedge belts			
Section	raw edge, moulded cogged	Section	wrapped
XPZ	56	SPZ	63
XPA	71	SPA	90
XPB	112	SPB	140
XPC	180	SPC	224
3VX/9NX	56	3V/9N	63
5VX/15NX	112	5V/15N	140

Standard Range

optibelt KB Kraftbands



Power Transmission

Construction

The Optibelt KB Kraftbands are made up of individual V-belts rigidly connected by a joining band. This compact drive element with single belt characteristics is also known as a joined V-belt. According to application kraftbands are fitted with two, three, four or five ribs. It is also possible to provide the joining band with special patterns.

Raw edge, moulded cogged Optibelt KBX Kraftbands with the belt sections 3VX/9JX, 5VX/15JX, XPZ, XPA, AX/HAX, BX/HBX are available upon request in lengths from 1250 to 3550 mm.

In mechanical engineering kraftbands are successfully used for example in vibrating screens, saw mills, stone crushers, road construction machinery, pulpers, compressors, fans, lathes, grinding and milling machines.

In agricultural machinery Optibelt KB Kraftbands are also used as clutching belts. Due to the single belt characteristics it is possible to achieve smooth engagement.

For conveying, Optibelt KB Kraftbands can be supplied with special top surfaces.

With these patterned top surfaces they are especially suitable for transporting containers and heavy material, for example for loading aircraft. See also the chapter on conveyor belts.


Optibelt KB



Optibelt KBX



PKR 0

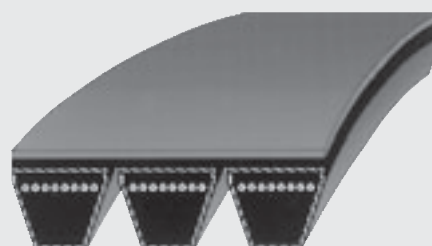

PKR 3



Applications

Optibelt KB Kraftbands are predominantly employed for solving problems associated with:

- pulsating loads
- large centre distances in combination with small pulley diameters (long span lengths)
- vertical shafts
- reversing drives
- V-flat drives
- clutching drives
- conveyor systems (materials handling technology))

Kraftbands must be protected from direct contact with undesired material such as stones, grit, wood shavings etc. In such operating conditions the drive has to be protected by protective guards or similar devices.

Standardisation – Optibelt KB Kraftband

Optibelt KB Kraftbands with high performance wedge belts are manufactured according to international practice using sections 3V/9J, 5V/15J, 8V/25J. They comply with the standard ISO 8419 lengths in the reference system. The pulleys are standardised to ISO 5290.

Standard Range

optibelt KB Kraftbands



The ISO Committee TC 41/SC1 has used the American Standard RMA/MPTA as the basis for this international standard. The sections 3V, 5V, and 8V have been designated 9J, 15J and 25J respectively.

Example: 9J
9 ≈ approx. 9 mm nominal top width of pulley groove
J = joined

Standardisation – Classical V-Belts

In the course of international and national standardisation, Optibelt KB Kraftbands using classical V-belts have been brought into line with the USA Standard RMA/MPTA (A, B, C, D) and the USA Standard ASAE S 211. ... (HA, HB, HC, HD). The RMA/MPTA standard applies for the use of kraftbands in mechanical engineering; the agricultural machinery standard ASAE S 211. ... applies when using kraftbands in agricultural machinery. Despite the different section designation, the belt cross sections are identical in both standards.

The pulleys are standardised according to ISO 5291.

Optibelt KB Kraftband

Optibelt KB Kraftbands are employed for extreme shock loads, large centre distances in combination with comparatively small pulley diameters and vertical drives. They are used for coupling drives and for conveying works. With the same power transmission, the kraftband offers better running properties and/or safety.

Optibelt Kraftbands with sections SPZ, SPA and SPC can be applied in standard V-grooved pulleys according to BS 3790, DIN 2211 and ISO 4183.

Drive Calculation

Drives using Optibelt KB Kraftbands in mechanical engineering are to be fitted as shown in the calculation examples on pages 78 to 80 of this manual using the power ratings of the relevant belt sections. In ISO 5290, the nominal top width of the pulley groove is specified as the base value. The position of the datum diameter is given as an approximate value. For the geometric and power calculation, the outside diameter is used. Small computational differences in rotational frequency and speed ratio have no practical effect.

For kraftbands with classical V-belts, as a rule, the calculation uses the datum diameter as well. The power ratings correspond to the sections of the classical V-belts.

For conversion factors for Optibelt KB Kraftbands, see page 144.

Drives on agricultural machinery employ special design calculations and methods. We, therefore, request that you send us your technical details.

Kraftband sets must be used for drives with more than 5 ribs. The following combinations should be used.

Important: Where kraftbands are to be run in sets they should be ordered as sets.

Table 7

No. of ribs	Kraftband combination
2	2
3	3
4	4
5	5
6	3/3
7	3/4
8	4/4
9	5/4
10	5/5
11	4/3/4
12	4/4/4
13	4/5/4
14	5/4/5
15	5/5/5
16	4/4/4/4
17	4/4/5/4
18	5/4/4/5
19	5/4/5/5
20	5/5/5/5
21	4/4/5/4/4
22	5/4/4/4/5
23	5/4/5/4/5
24	5/5/4/5/5
25	5/5/5/5/5
26	5/4/4/4/4/5
27	5/5/4/4/4/5
28	5/5/4/4/5/5
29	5/5/5/4/5/5
30	5/5/5/5/5/5
31	5/4/4/5/4/4/5
32	5/5/4/4/4/5/5
33	5/5/5/4/4/5/5
34	5/5/5/4/5/5/5
35	5/5/5/5/5/5/5
36	5/5/4/4/4/4/5/5
37	5/5/5/4/4/4/5/5
38	5/5/5/4/4/5/5/5
39	5/5/5/5/4/5/5/5
40	5/5/5/5/5/5/5/5

Ordering Example

The drive of a mill is equipped with Optibelt KB Kraftbands, size 5V 1600/15J 4064 mm L_a. It was calculated with 18 ribs. In total, 4 kraftbands are required – 2 belts each with 4 ribs and 2 belts each with 5 ribs (see Table 7).

The order wording would then read:
1 set comprising 2 Optibelt KB Kraftbands 4-5V 1600/15J 4064 mm L_a and 2 Optibelt KB Kraftbands 5-5V 1600/15J 4064 mm L_a.


- 4 or 5 = number of ribs
- 5V/15J = section
- 1600 = outside length in inches: 10
- 4064 = outside length in mm

Standard Range

optibelt *SUPER VX* and *SUPER DVX* Variable Speed Belts – Raw Edge – Moulded Cogged – DIN 7719/ISO 1604



Optibelt *SUPER VX* Variable Speed Belts – Raw Edge – Moulded Cogged –

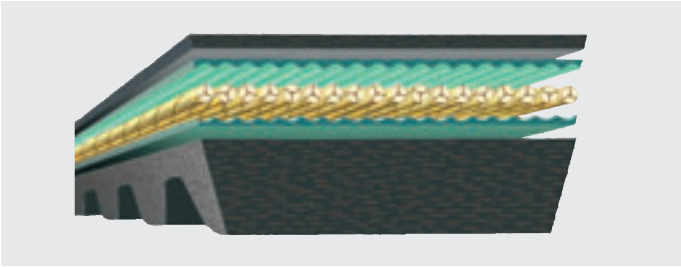

Rising demands made on the variable speed belt by the continuous increase in transmitted power led to the development of the raw edge, moulded cogged variable speed belt.

The base compound consists of a chloroprene and rubber mixture filled with transversely oriented fibres. The high grade and exceptionally low stretch polyester or Aramid tension cord is embedded in a rubber cushioning compound. It is effectively supported by the reinforced base compound and by layers of compound impregnated fabric around the outside of the section. For exceptionally difficult drives layers of special cross cord material can be used between the base and cushion compounds.

The special properties of the raw edge, moulded cogged, variable speed belt are:

- high power transmission capability
- excellent flexibility in the direction of travel
- extreme transverse rigidity
- especially smooth running
- superior resistance to abrasion and slip
- long service life


Sections

Belt widths of up to 100 mm
Belt thicknesses of 5–25 mm

Dimensions

Lengths up to 5000 mm
Standardised dimensions to BS/DIN/ISO and USA Standard RMA/MPTA

Optibelt *SUPER DVX* Variable Speed Belts – Raw Edge – Moulded Double Cogged –

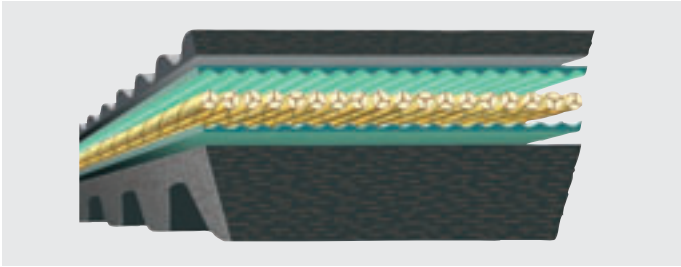

Further increases in demand on the performance of drive elements and the trend towards designing ever smaller, space saving drive units, led to the development of the double cogged, raw edge Optibelt *SUPER DVX* variable speed belt.

Double cogged Optibelt variable speed belts make it possible to employ the smallest diameter pulleys, even below standard recommendations. The double cogged design improves heat dissipation thereby significantly reducing the belt running temperature. The production method and the structure of the belt have been derived from the raw edge *SUPER VX* variable speed belt. Depending upon the application, this belt can also be equipped with layers of special cross cord material in the base compound. The belt is double cogged, with the depth and spacing of the cogs matched to the specific belt section. The polyester or Aramid tension cord ensures ideal power transmission, increased service life, and extremely low stretch characteristics.

The features of the *SUPER DVX* variable speed belt can be summarised as follows:

- acceptance of extremely high axial forces
- high flexibility and low flex fatigue
- improved heat dissipation
- use with the smallest pulley diameters
- extremely smooth running at high belt speeds
- long service life

Sections

Belt widths of 20–85 mm
Belt thicknesses of 10–30 mm

Dimensions

Lengths ranging from 600 to 3500 mm
Sections and dimensions comparable to BS/DIN/ISO

Applications

industrial machinery	special drives
variable speed drives	compactors
printing machinery	multi-colour offset drives
gearboxes	variable diameter pulley sets
agricultural machinery	thresher drum drives
textile machinery	winding machinery
machine tools	lathes
automotive technology	snowmobile drives

Optibelt VS Variable Speed Belts – Wrapped

The first generation variable speed belt was the Optibelt VS. In its design, the Optibelt VS is similar to the wrapped, classical V-belt or wedge belt.

This belt construction is still available.

Sections and dimensions: upon request


Standard Range

optibelt DK Double Section V-Belts



Construction

A cross section of the Optibelt DK double section V-belt reveals a hexagon made up of two congruent trapeziums. The neutral axis containing the tension cord is exactly half way up the belt section. Optibelt DK double section V-belts comprise:

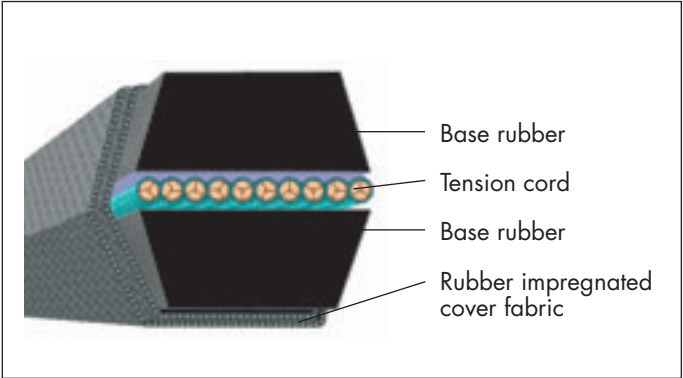

Properties/Applications

The polyester tension cord positioned at the centre of the section imparts extreme flexibility and low stretch properties to the Optibelt DK double section V-belt. The belt is therefore particularly suited for flexing in different directions in the same plane. Optibelt DK double section V-belts are used where several pulleys are arranged in one plane and the direction of rotation of one or more of the driven pulleys must be changed without crossing the belts. Because of the positioning of the tension cord in the neutral axis and the special shape of the double section V-belt, the tension cord is not subjected to any force other than tension unlike standard V-belts bent around an outside idler. The Optibelt DK double section V-belt comes into its own on typical serpentine arrangements. Special constructions are also possible. In the main, double section V-belts are used on agricultural machinery. They are, however, also finding increasing use in industrial machinery applications.

Standardisation

The cross dimensions of the Optibelt DK double section V-belts correspond to DIN 7722 and ISO 5289.

There are also equivalent sections HAA, HBB, HCC and HDD, in accordance with the USA Standard ASAE S 211. ..., thereby ensuring an international interchange facility.

The effective/nominal length of the Optibelt DK double section V-belt is measured on the effective/outside diameter of the measuring pulley. This length equates roughly to length of the belt at its widest part, the middle length.

Conversion factors are as follows:

- Section AA/HAA effective length = middle length – 4 mm
- Section BB/HBB effective length = middle length – 8 mm
- Section CC/HCC effective length = middle length + 3 mm
- Section DD/HDD effective length = middle length!

Experience has shown that, in practical use/ordering, these conversion factors can be ignored.

Grooved Pulleys

No special pulleys are required for Optibelt DK double section V-belts. Pulleys conforming to ISO 4183, BS 3790, DIN 2211, DIN 2217 and ASAE S 211. ... are suitable.

- Section AA/HAA in grooved pulleys for A/13-SPA
- Section BB/HBB in grooved pulleys for B/17-SPB
- Section CC/HCC in grooved pulleys for C/22-SPC
- Section DD/HDD in grooved pulleys for D/32

Special Sections

For special applications, we also supply double section V-belts widths 22 x 22 and 25 x 22. These are not standardised.

Drive Calculation


Drive calculations for Optibelt DK double section V-belts differ from those given in this manual for two pulley drives. Multi pulley calculations are so complicated that they cannot be shown here.

Effective lengths, rotational speeds, transmission ratios and belt speeds are determined by the effective/outside pulley diameters.

Our engineers will be pleased to assist in the design of drives using Optibelt DK double section V-belts.

Table 8

Section	DIN/ISO section	HAA	HBB	HCC	HDD	-	-
	Abbreviated designation	AA	BB	CC	DD	22 x 22	25 x 22
Belt width	b ≈	13	17	22	32	22	25
Belt height	h ≈	10	13	17	25	22	22
Recommended minimum pulley datum diameter	d _{a min}	80	125	224	355	280	280
Belt weight (kg/m)	≈	0.150	0.250	0.440	0.935	0.511	0.625
Max. belt speed (m/s)	v _{max} ≈	30					

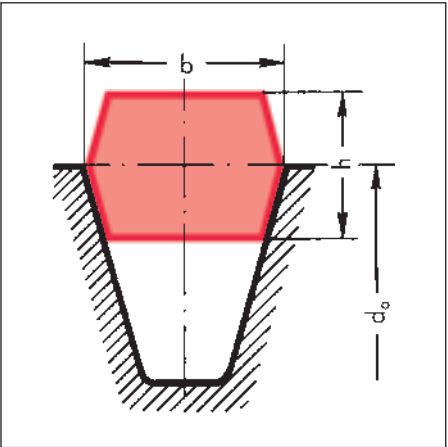

Standard Properties



According to the respective requirements, all Optibelt V-belts are manufactured using carefully selected basic materials and continuously updated technical procedures.

Regular routine checks during production, sophisticated lab tests and careful testing of the raw materials used guarantee a uniformly high level of quality that can be expected from every Optibelt drive element. Reliability and long service life are considered the most important criteria.



Oil Resistant

Oil resistance prevents damaging through mineral oils and mineral fats, insofar as those substances are not continuously and in great quantities in contact with the V-belts. Animal and vegetable fats as well as water-soluble cooling and cutting oils result in a reduction of the service life. For higher concentrations, we recommend the use of our Super X-POWER special constructions "05" and SUPER TX V-belts respectively.



Heat Resistant

Standard V-belts allow ambient temperatures of up to approximately + 70 °C. Higher temperatures lead to a premature ageing and hardening of the V-belts. Therefore, we recommend in such cases the use of our special construction RED POWER II, Super X-POWER or SUPER TX. For details see page 18.



Dust Protection

Dust reduces the service life of V-belts enormously. Wear resistant fabric covers make Optibelt V-belts resistant to dust. This is demonstrated by its continual application in cement factories, mills, in the stone processing industries, and in the mining industry.



M=S "Matched Sets"

This stands for rawedge, moulded cogged V-belts that can be used in a set without measuring (Super X-POWER and SUPER TX).

Due to specific manufacturing techniques, extremely narrow length tolerances can be achieved so that V-belts of a given nominal length can be combined without further measurement. Ground belt flanks result in a smooth running operation. The even power transmission of all V-belts ensures a high efficiency and thus helps save energy. Set code numbers are not necessary, there is no set bundling. As a consequence, storage and costs can be reduced.




S=C PLUS "SetConstant"

This stands for wrapped V-belts that can be used in a set without measuring.

The advantages are the following:

- + saves energy, high efficiency of approximately 97 %
- + evenly shared power transmission
- + incorporating the world famous S=C PLUS tolerances: always around the nominal length
- + extremely low stretch
- + longer service life
- + set code numbers are not required
- + reduces vibrations with resultant smooth running
- + requires only little adjustment
- + reduces selfheating, thus improves ageing resistance
- + longer maintenance intervals
- + reduced belt inventory
- + resultant cost reductions

Example for S=C PLUS length tolerances for a highperformance wedge belt with 5000 mm datum length

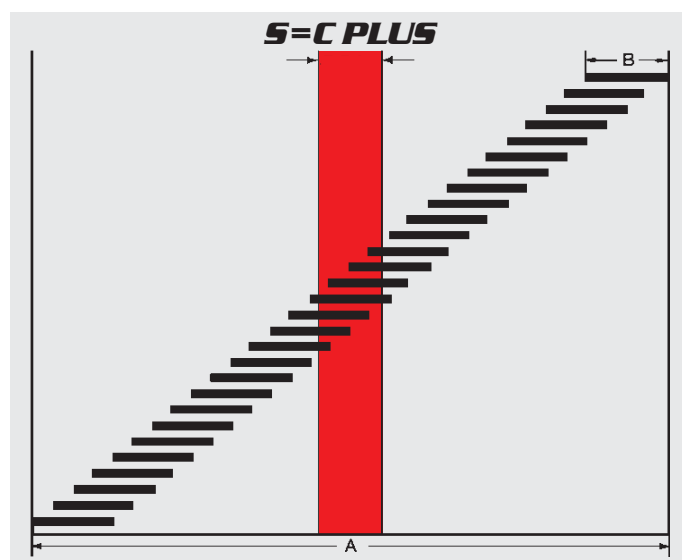

The dimension (A) is the tolerance permitted according to DIN of an individual V-belt with a length of 5000 mm. If you want to assemble sets for multi-groove drives, the individual elements may not show deviations of more than 6 mm (B) between any belt in a set.

The tolerance of the Optibelt S=C PLUS V-belt is considerably lower than the set tolerance permitted according to the standard.

S=C PLUS tolerances are always around the nominal length.

Special Constructions



Anti-Static

Optibelt V-belts do have anti-static properties. In the case of V-belts with inadequate anti-static properties, the electrostatic charge can be so high that there is a risk of ignition due to sparking. The use of anti-static belts requires a check of the required properties in accordance with ISO 1813. We present proof of the anti-static properties of the belts in the form of our final inspection certificate according to EN 10204 "3.1.B".

We charge an extra fee for this additional service. We strongly recommend that anti-static belts be ordered separately.

Extra Heat Resistant V-Belts, Special Construction XHR

The service life of standard Optibelt V-belts can be greatly reduced due to the effects of temperature.

In case of ambient temperatures that vary constantly between approx. + 70 °C up to approx. + 90 °C, we recommend that RED POWER II, Super X-POWER or SUPER TX belts be used. Special rubber compounds largely prevent premature ageing and brittleness. In borderline cases, trials are recommended, as individual drive parameters such as belt speed and pulley diameter also have an influence on the belt life.

The diagram below illustrates the high degree to which the ambient temperature influences the service life of V-belts. It shows the improvements in service life heat resistant belts offer within the high-temperature range in comparison to the standard design. However, you cannot expect the same service life as under normal conditions.

Extra Cold Resistant V-Belt Special Construction XCR

Minimum order quantities on request.

Smooth Running Selected V-belts, Special Construction LR

Drives that have to fulfil high requirements with regard to smooth running – that is with variations of shaft centre distances – like for example lathes and grinders, and are supposed to guarantee a vibration free operation, may be equipped with Optibelt V-belts "selected smooth running". Shaft centre distance fluctuations are measured electronically on test machines. The measurements comply with the Optibelt Works Standards or the conditions agreed with our customers.

Mining Industry

Optibelt SK wedge belts and Optibelt VB classical V-belts are approved in accordance with DIN 22100-7 and can be used in underground mining as well as in spaces and areas above ground that are exposed to fire and explosion risks. Please request information on sections and lengths separately.


Applications with Other Special Constructions

- For particular applications such as general engineering machinery, agricultural machinery and horticulture, further special constructions are also available in intermediate sizes for
- special drives with tensioning, guide and idler pulleys
 - clutching functions
 - shock loads
 - extreme operating conditions

These Optibelt V-belt special constructions can incorporate different tension cord types and arrangements with a variety of rubber mixtures, different fabric qualities and a differing number of fabric covers and top surface elements.

All special executions and intermediate lengths must be ordered in sets or in multiples thereof.


It is not possible to describe all criteria within the framework of these descriptions. For further information please contact our Applications Engineering Department.

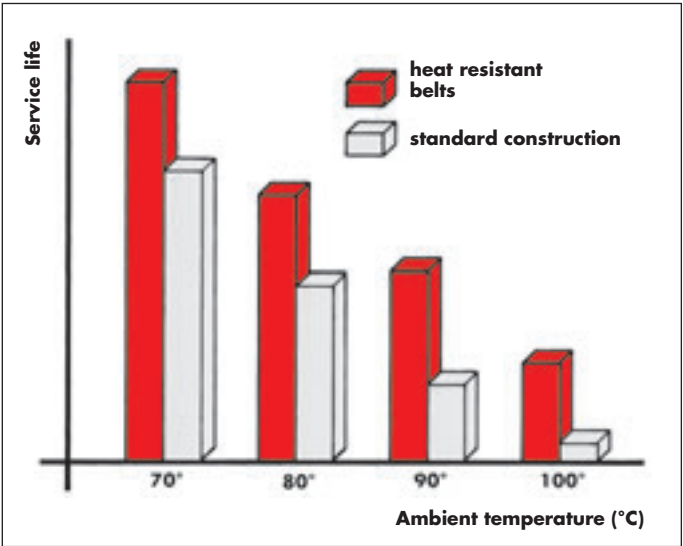

Standard Range

optibelt **SK** Wedge Belts

to BS 3790/DIN 7753 Part 1/ISO 4184

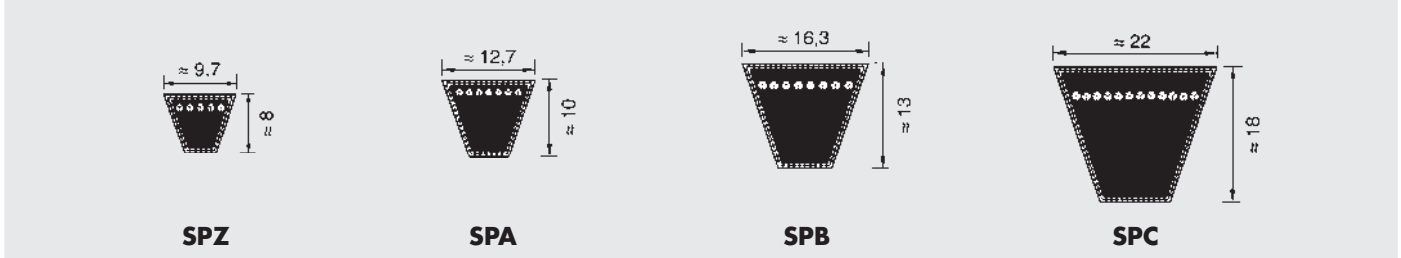


Section SPZ			Section SPA				Section SPB		Section SPC
Datum length ISO (mm) L _d			Datum length ISO (mm) L _d				Datum length ISO (mm) L _d		Datum length ISO (mm) L _d
487	1037	1637	732	1382	2120	3350	1250	3750	2000
512	1047	1662	757	1400	2132	3382	1320	3800	2120
562	1060	1687	782	1407	2182	3550	1400	4000	2240
587	1077	1700	800	1432	2207	3750	1450	4050	2360
612	1087	1737	807	1457	2232	4000	1500	4250	2500
630	1112	1762	832	1482	2240	4250	1600	4300	2650
637	1120	1787	850	1500	2282	4500	1700	4500	2800
662	1137	1800	857	1507	2300		1750	4560	3000
670	1162	1812	882	1532	2307		1800	4750	3150
687	1180	1837	900	1557	2332		1850	4820	3350
710	1187	1862	907	1582	2360		1900	5000	3550
722	1202	1887	932	1600	2382		2000	5070	3750
737	1212	1900	950	1607	2432		2020	5300	4000
750	1237	1937	957	1632	2482		2060	5600	4250
762	1250	1987	982	1657	2500		2120	6000	4500
772	1262	2000	1000	1682	2532		2150	6300	4750
787	1287	2037	1007	1700	2582		2180	6700	5000
800	1312	2120	1032	1707	2607		2240	7100	5300
812	1320	2137	1060	1732	2632		2280	7500	5600
825	1337	2150•	1082	1757	2650		2360	8000	6000
837	1347	2187	1107	1782	2682		2400		6300
850	1362	2240	1120	1800	2732		2500		6700
862	1387	2287	1132	1807	2782		2650		7100
875	1400	2360	1157	1832	2800		2680		7500
887	1412	2500	1180	1857	2832		2800		8000
900	1437	2540•	1207	1882	2847		2840		8500
912	1462	2650	1232	1900	2882		2850		9000
925	1487	2690•	1250	1907	2932		2900		9500
937	1500	2800	1257	1932	2982		3000		10000
950	1512	2840•	1272	1957	3000		3150		10600
962	1537	3000	1282	1982	3032		3250		11200
987	1562	3150	1307	2000	3082		3350		12500
1000	1587	3350	1320	2032	3150		3450		
1012	1600	3550	1332	2057	3182		3550		
1024	1612		1357	2082	3282		3650		
Maximum production length: 4500 mm L _d Minimum order quantity: Over 1800 mm = 20 belts for non standard lengths 60 belts for certain special constructions Weight: ≈ 0.074 kg/m			Maximum production length: 4500 mm L _d Minimum order quantity: Over 1800 mm = 31 belts for non standard lengths 93 belts for certain special constructions Weight: ≈ 0.123 kg/m				Max. production length: 10000 mm L _d Minimum order quantity: Over 1800 mm = 25 belts for non standard lengths 75 belts for certain special constructions Weight: ≈ 0.195 kg/m		Max. production length: 18000 mm L _d Minimum order quantity: Over 2000 mm = 16 belts for non standard lengths 48 belts for certain special constructions Weight: ≈ 0.377 kg/m

Datum length L_d ≙ pitch length L_w/L_p • Non stock items

Standard Range

optibelt 5K Wedge Belts

to USA Standard RMA/MPTA

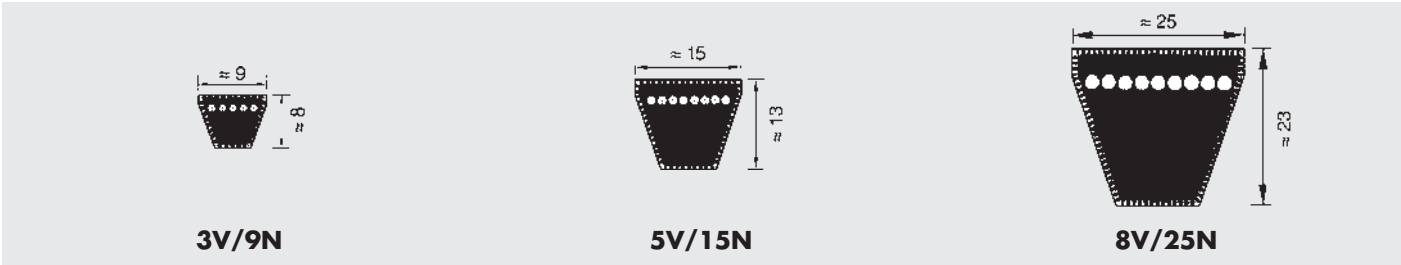

Section 3V/9N		Section 5V/15N		Section 8V/25N	
Designation	Designation (outside length mm) L _a	Designation	Designation (outside length mm) L _a	Designation	Designation (outside length mm) L _a
3V 250	9N 635	5V 530	15N 1346	8V 1000	25N 2540
3V 265	9N 673	5V 560	15N 1422	8V 1120	25N 2845
3V 280	9N 711	5V 600	15N 1524	8V 1180	25N 2997
3V 300	9N 762	5V 630	15N 1600	8V 1250	25N 3175
3V 315	9N 800	5V 670	15N 1702	8V 1320	25N 3353
3V 335	9N 851	5V 710	15N 1803	8V 1400	25N 3556
3V 355	9N 902	5V 750	15N 1905	8V 1500	25N 3810
3V 375	9N 952	5V 800	15N 2032	8V 1600	25N 4064
3V 400	9N 1016	5V 850	15N 2159	8V 1700	25N 4318
3V 425	9N 1079	5V 900	15N 2286	8V 1800	25N 4572
3V 450	9N 1143	5V 950	15N 2413	8V 1900	25N 4826
3V 475	9N 1206	5V 1000	15N 2540	8V 2000	25N 5080
3V 500	9N 1270	5V 1060	15N 2692	8V 2120	25N 5385
3V 530	9N 1346	5V 1120	15N 2845	8V 2240	25N 5690
3V 560	9N 1422	5V 1180	15N 2997	8V 2360	25N 5994
3V 600	9N 1524	5V 1250	15N 3175	8V 2500	25N 6350
3V 630	9N 1600	5V 1320	15N 3353	8V 2650	25N 6731
3V 670	9N 1702	5V 1400	15N 3556	8V 2800	25N 7112
3V 710	9N 1803	5V 1500	15N 3810	8V 3000	25N 7620
3V 750	9N 1905	5V 1600	15N 4064	8V 3150	25N 8001
3V 800	9N 2032	5V 1700	15N 4318	8V 3350	25N 8509
3V 850	9N 2159	5V 1800	15N 4572	8V 3550	25N 9017
3V 900	9N 2286	5V 1900	15N 4826	8V 3750	25N 9525
3V 950	9N 2413	5V 2000	15N 5080	8V 4000	25N 10160
3V 1000	9N 2540	5V 2120	15N 5385	8V 4250	25N 10795
3V 1060	9N 2692	5V 2240	15N 5690	8V 4500	25N 11430
3V 1120	9N 2845	5V 2360	15N 5994	8V 4750	25N 12065
3V 1180	9N 2997	5V 2500	15N 6350	8V 5000	25N 12700
3V 1250	9N 3175	5V 2650	15N 6731		
3V 1320	9N 3353	5V 2800	15N 7112		
3V 1400	9N 3556	5V 3000	15N 7620		
		5V 3150	15N 8001		
		5V 3350	15N 8509		
		5V 3550	15N 9017		

Maximum production length: 4250 mm L_a
Minimum order quantity:
Over 1800 mm L_a =
20 belts for non standard lengths
60 belts for certain special constructions
Weight: ≈ 0.074 kg/m


Maximum production length: 10000 mm L_a
Minimum order quantity:
Over 1800 mm L_a =
25 belts for non standard lengths
75 belts for certain special constructions
Weight: ≈ 0.195 kg/m

Maximum standard production length: 18000 mm L_a
Over 18000 to 19000 mm on request
Minimum order quantity:
Over 2540 mm L_a =
11 belts for non standard lengths
33 belts for certain special constructions
Weight: ≈ 0.575 kg/m

Standard Range

optibelt *RED POWER II* High Performance Wedge Belts

USA Standard RMA/MPTA

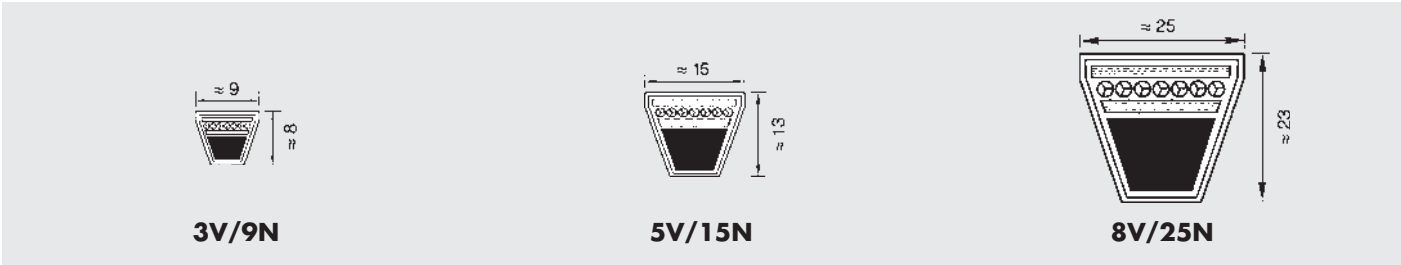


Section 3V/9N		Section 5V/15N		Section 8V/25N	
Designation	Designation (outside length mm) L _a	Designation	Designation (outside length mm) L _a	Designation	Designation (outside length mm) L _a
3V 475	9N 1206	5V 530	15N 1346	8V 1000	25N 2540
3V 500	9N 1270	5V 560	15N 1422	8V 1120	25N 2845
3V 530	9N 1346	5V 600	15N 1524	8V 1180	25N 2997
3V 560	9N 1422	5V 630	15N 1600	8V 1250	25N 3175
3V 600	9N 1524	5V 670	15N 1702	8V 1320	25N 3353
3V 630	9N 1600	5V 710	15N 1803	8V 1400	25N 3556
3V 670	9N 1702	5V 750	15N 1905	8V 1500	25N 3810
3V 710	9N 1803	5V 800	15N 2032	8V 1600	25N 4064
3V 750	9N 1905	5V 850	15N 2159	8V 1700	25N 4318
3V 800	9N 2032	5V 900	15N 2286	8V 1800	25N 4572
3V 850	9N 2159	5V 950	15N 2413	8V 1900	25N 4826
3V 900	9N 2286	5V 1000	15N 2540	8V 2000	25N 5080
3V 950	9N 2413	5V 1060	15N 2692	8V 2120	25N 5385
3V 1000	9N 2540	5V 1120	15N 2845	8V 2240	25N 5690
3V 1060	9N 2692	5V 1180	15N 2997	8V 2360	25N 5994
3V 1120	9N 2845	5V 1250	15N 3175	8V 2500	25N 6350
3V 1180	9N 2997	5V 1320	15N 3353	8V 2650	25N 6731
3V 1250	9N 3175	5V 1400	15N 3556	8V 2800	25N 7112
3V 1320	9N 3353	5V 1500	15N 3810	8V 3000	25N 7620
3V 1400	9N 3556	5V 1600	15N 4064	8V 3150	25N 8001
		5V 1700	15N 4318	8V 3350	25N 8509
		5V 1800	15N 4572	8V 3550	25N 9017
		5V 1900	15N 4826	8V 3750	25N 9525
		5V 2000	15N 5080	8V 4000	25N 10160
		5V 2120	15N 5385	8V 4250	25N 10795
		5V 2240	15N 5690	8V 4500	25N 11430
		5V 2360	15N 5994	8V 4750	25N 12065
		5V 2500	15N 6350		
		5V 2650	15N 6731		
		5V 2800	15N 7112		
		5V 3000	15N 7620		
		5V 3150	15N 8001		
Maximum production length: 4000 mm L _a		Maximum production length: 9525 mm L _a		Maximum production length: 12065 mm L _a	
Non standard lengths on request		Non standard lengths on request		Non standard lengths on request	
Weight: ≈ 0.074 kg/m		Weight: ≈ 0.195 kg/m		Weight: ≈ 0.575 kg/m	

Standard Range

optibelt *RED POWER II* High Performance Wedge Belts

BS 3790/DIN 7753 Part 1/ISO 4184

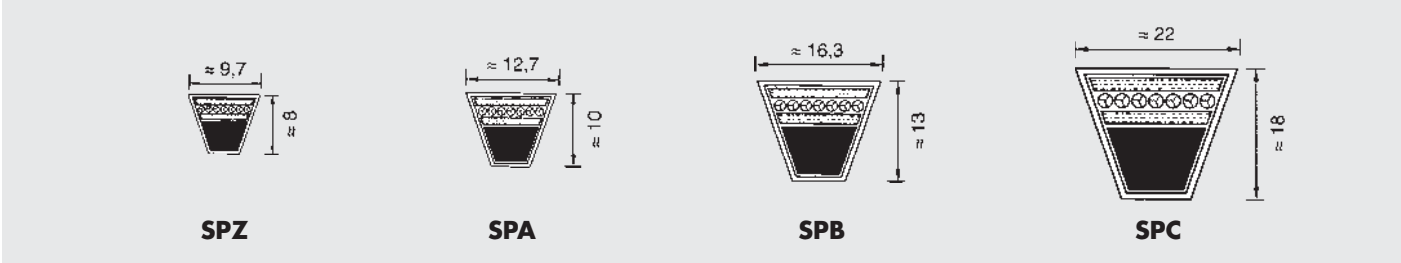

Section SPZ			Section SPA				Section SPB	Section SPC
Datum length ISO (mm) L _d			Datum length ISO (mm) L _d				Datum length ISO (mm) L _d	Datum length ISO (mm) L _d
1202	1587	2137	1207	1700	2282	3082	1250	2000
1212	1600	2187	1232	1707	2300	3150	1320	2120
1237	1612	2240	1250	1732	2307	3182	1400	2240
1250	1637	2287	1257	1757	2332	3282	1500	2360
1262	1662	2360	1282	1782	2360	3350	1600	2500
1287	1687	2500	1307	1800	2382	3382	1700	2650
1312	1700	2650	1320	1807	2432	3550	1800	2800
1320	1737	2800	1332	1832	2482	3750	1900	3000
1337	1762	3000	1357	1857	2500	4000	2000	3150
1362	1787	3150	1382	1882	2532		2120	3350
1387	1800	3350	1400	1900	2582		2240	3550
1400	1837	3550	1407	1907	2607		2360	3750
1412	1862		1432	1932	2632		2500	4000
1437	1887		1457	1957	2650		2650	4250
1462	1900		1482	1982	2682		2800	4500
1487	1937		1500	2000	2732		3000	4750
1500	1987		1507	2032	2782		3150	5000
1512	2000		1532	2057	2800		3350	5300
1537	2037		1557	2082	2832		3550	5600
1562	2120		1582	2120	2847		3750	6000
			1600	2132	2882		4000	6300
			1607	2182	2932		4250	6700
			1632	2207	2982		4500	7100
			1657	2232	3000		4750	7500
			1682	2240	3032		5000	8000
							5300	8500
							5600	9000
							6000	9500
							6300	10000
							6700	
							7100	
							7500	
							8000	
Maximum production length: 4000 mm L _d			Maximum production length: 4000 mm L _d				Maximum production length: 8 000 mm L _d	Maximum production length: 10 000 mm L _d
Non standard lengths on request			Non standard lengths on request				Non standard lengths on request	Non standard lengths on request
Weight: ≈ 0.074 kg/m			Weight: ≈ 0.123 kg/m				Weight: ≈ 0.195 kg/m	Weight: ≈ 0.377 kg/m
Datum length L _d ≙ pitch length L _w /L _p								

Standard Range

optibelt VB Classical V-Belts


to BS3790/DIN 2215/ISO 4184




5



Y/6



8



Z/10

Section 5*		Section Y/6*		Section 8		Section Z/10								
Datum length ISO L _d (mm)	Inside length L _i (mm)	Datum length ISO L _d (mm)	Inside length L _i (mm)	Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)
200	190	295	280	335*	315*	Z 11	312*	290*	Z 38½	997	975	Z 68	1747	1725
239	229	315	300	375*	355*	Z 12½	337*	315*	Z 39	1022	1000	Z 69	1772	1750
270	260	350	335	420*	400*	Z 14	397*	375*	Z 40	1038	1016	Z 70	1797	1775
290	280	415	400	445*	425*	Z 15	422*	400*	Z 40½	1052	1030	Z 71	1822	1800
310	300	440	425	470*	450*	Z 16	447*	425*	Z 41	1063	1041	Z 73	1872	1850
325	315	465	450	495*	475*	Z 17	472*	450*	Z 41½	1072	1050	Z 75	1922	1900
332	322	515	500	510*	490*	Z 18	497*	475*	Z 42	1082	1060	Z 78	1997	1975
345	335	555	540	550*	530*	Z 19	502*	480*	Z 43	1102	1080	Z 79	2022	2000
385	375	615	600	580*	560*	Z 19¾	522*	500*	Z 43¼	1122	1100	Z 83½	2142	2120
435	425	865	850	595*	575*	Z 20	537*	515*	Z 44	1142	1120	Z 88	2262	2240
485	475			620*	600*	Z 20½	547*	525*	Z 45	1172	1150	Z 93	2382	2360
510	500			650*	630*	Z 21	552*	530*	Z 46	1187	1165	Z 98	2522	2500
540	530			690*	670*	Z 21¼	562*	540*	Z 46½	1202	1180			
564	554			720*	700*	Z 22	582*	560*	Z 47	1216	1194			
610	600			730*	710*	Z 23	597	575	Z 48	1237	1215			
				770*	750*	Z 24	622	600	Z 48½	1247	1225			
				795*	775*	Z 25	652	630	Z 49	1272	1250			
				820*	800*	Z 26	672	650	Z 50	1292	1270			
				845	825	Z 27	692	670	Z 51	1317	1295			
				870	850	Z 27½	722	700	Z 52	1342	1320			
				895	875	Z 28	732	710	Z 53	1368	1346			
				920	900	Z 28½	747	725	Z 54	1393	1371			
				970	950	Z 29	752	730	Z 55	1422	1400			
				1020	1000	Z 29½	772	750	Z 56	1444	1422			
				1040	1020	Z 30	787	765	Z 57	1472	1450			
				1070	1050	Z 31	797	775	Z 58	1497	1475			
				1095	1075	Z 31½	822	800	Z 59	1522	1500			
				1140	1120	Z 32	842	820	Z 60	1546	1524			
				1220	1200	Z 33	847	825	Z 61	1572	1550			
				1270	1250	Z 33½	872	850	Z 62	1597	1575			
						Z 34	887	865	Z 63	1622	1600			
						Z 35	897	875	Z 64	1648	1626			
						Z 36	922	900	Z 65	1673	1651			
						Z 37	947	925	Z 66	1697	1675			
						Z 38	972	950	Z 67	1722	1700			
Other sizes on request Weight: ≈ 0.018 kg/m	Other sizes on request Weight: ≈ 0.026 kg/m	Other sizes on request Weight: ≈ 0.042 kg/m	Maximum production length: 4500 mm L _i Minimum order quantity: Over 1800 mm = 20 belts for non standard lengths 60 belts for certain special constructions Weight: ≈ 0.064 kg/m											


Datum length L_d ≙ pitch length L_w/L_p * Raw edge, moulded cogged V-belts Other sizes on request

Lengths in bold print are in the S=C PLUS range.

Standard Range

optibelt VB Classical V-Belts

to BS 3790/DIN 2215/ISO 4184



A/13

Section A/13

Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)
A 16	437	407	A 41	1071	1041	A 69	1780	1750	A 105	2697	2667
A 18	487	457	A 41½	1080	1050	A 70	1805	1775	A 107	2755	2725
A 19	510	480	A 42	1090	1060	A 71	1830	1800	A 108	2773	2743
A 20	538	508	A 42½	1105	1075	A 72	1855	1825	A 110	2830	2800
A 21	565	535	A 43	1130	1100	A 73	1884	1854	A 112	2875	2845
A 22	590	560	A 43½	1135	1105	A 74	1910	1880	A 114	2926	2896
A 23	605	575	A 44	1150	1120	A 75	1930	1900	A 116	2976	2946
A 23½	630	600	A 45	1173	1143	A 76	1960	1930	A 118	3030	3000
A 24	640	610	A 45½	1180	1150	A 77	1986	1956	A 120	3078	3048
A 25	660	630	A 46	1198	1168	A 78	2010	1980	A 124	3180	3150
A 26	680	650	A 46½	1210	1180	A 79	2030	2000	A 128	3280	3250
A 26½	700	670	A 47	1230	1200	A 80	2062	2032	A 132	3380	3350
A 27	716	686	A 47½	1245	1215	A 81	2090	2060	A 136	3484	3454
A 27½	730	700	A 48	1250	1220	A 82	2113	2083	A 140	3580	3550
A 28	740	710	A 48½	1255	1225	A 83	2130	2100	A 144	3688	3658
A 29	760	730	A 49	1280	1250	A 83½	2150	2120	A 148	3780	3750
A 29½	780	750	A 50	1300	1270	A 84	2164	2134	A 158	4030	4000
A 30	797	767	A 51	1330	1300	A 84½	2180	2150	A 167	4280	4250
A 31	805	775	A 52	1350	1320	A 85	2190	2160	A 187	4780	4750
A 31½	830	800	A 53	1380	1350	A 86	2230	2200	A 197	5030	5000
A 32	843	813	A 54	1405	1375	A 87	2240	2210			
A 32½	855	825	A 55	1430	1400	A 88	2270	2240			
A 33	871	841	A 56	1452	1422	A 89	2291	2261			
A 34	880	850	A 57	1480	1450	A 90	2316	2286			
A 34½	905	875	A 58	1505	1475	A 91	2341	2311			
A 35	919	889	A 59	1530	1500	A 92	2367	2337			
A 35½	930	900	A 60	1555	1525	A 93	2390	2360			
A 36	944	914	A 61	1580	1550	A 94	2418	2388			
A 37	955	925	A 62	1605	1575	A 95	2443	2413			
A 37½	980	950	A 63	1630	1600	A 96	2468	2438			
A 38	995	965	A 64	1655	1625	A 97	2494	2464			
A 38½	1005	975	A 65	1680	1650	A 98	2530	2500			
A 39	1030	1000	A 66	1706	1676	A 100	2570	2540			
A 40	1046	1016	A 67	1730	1700	A 102	2621	2591			
A 40½	1060	1030	A 68	1755	1725	A 104	2680	2650			


Maximum production length: 10000 mm L_i
Minimum order quantity:
Over 1800 mm =
31 belts for non standard lengths
93 belts for certain special constructions
Weight: ≈ 0.109 kg/m

Datum length L_d ≅ pitch length L_w/L_p Other sizes on request

Standard Range

optibelt VB Classical V-Belts

to BS 3790/DIN 2215/ISO 4184



B/17

Section B/17

Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)
B 23	610	570	B 51	1340	1300	B 87	2250	2210	B 140	3590	3550
B 24	655	615	B 52	1360	1320	B 88	2280	2240	B 142	3640	3600
B 25	670	630	B 52½	1375	1335	B 89	2301	2261	B 144	3698	3658
B 26	690	650	B 53	1390	1350	B 90	2326	2286	B 146	3740	3700
B 26½	710	670	B 53½	1400	1360	B 91	2340	2300	B 148	3790	3750
B 27	726	686	B 54	1412	1372	B 92	2377	2337	B 150	3850	3810
B 28	750	710	B 55	1440	1400	B 93	2400	2360	B 151	3890	3850
B 29	765	725	B 56	1462	1422	B 94	2428	2388	B 152	3901	3861
B 30	790	750	B 57	1490	1450	B 94½	2440	2400	B 154	3952	3912
B 31	815	775	B 58	1513	1473	B 95	2453	2413	B 155	3990	3950
B 32	840	800	B 59	1540	1500	B 96	2478	2438	B 156	4002	3962
B 32½	865	825	B 60	1565	1525	B 96½	2490	2450	B 158	4040	4000
B 33	876	836	B 61	1590	1550	B 97	2505	2465	B 160	4104	4064
B 34	890	850	B 62	1615	1575	B 98	2540	2500	B 162	4155	4115
B 34½	915	875	B 63	1640	1600	B 99	2555	2515	B 165	4240	4200
B 35	929	889	B 64	1665	1625	B 100	2580	2540	B 167	4290	4250
B 36	940	900	B 65	1690	1650	B 101	2605	2565	B 173	4434	4394
B 37	965	925	B 66	1716	1676	B 102	2640	2600	B 175	4490	4450
B 37½	990	950	B 67	1740	1700	B 103	2656	2616	B 177	4540	4500
B 38	1005	965	B 68	1765	1725	B 104	2690	2650	B 180	4612	4572
B 38½	1015	975	B 69	1790	1750	B 105	2707	2667	B 187	4790	4750
B 39	1040	1000	B 69½	1801	1761	B 106	2740	2700	B 195	4993	4953
B 40	1056	1016	B 70	1815	1775	B 107	2758	2718	B 197	5040	5000
B 40½	1070	1030	B 71	1840	1800	B 108	2790	2750	B 208	5340	5300
B 41	1080	1040	B 72	1869	1829	B 110	2840	2800	B 210	5374	5334
B 41½	1090	1050	B 73	1890	1850	B 112	2885	2845	B 220	5640	5600
B 42	1100	1060	B 74	1920	1880	B 114	2940	2900	B 236	6040	6000
B 42½	1115	1075	B 75	1940	1900	B 115	2961	2921	B 240	6136	6096
B 43	1130	1090	B 76	1970	1930	B 116	2990	2950	B 248	6340	6300
B 43¼	1140	1100	B 77	1990	1950	B 118	3040	3000	B 264	6740	6700
B 44	1160	1120	B 78	2021	1981	B 120	3088	3048	B 276	7040	7000
B 45	1190	1150	B 79	2040	2000	B 122	3139	3099	B 280	7140	7100
B 45½	1203	1163	B 80	2072	2032	B 124	3190	3150			
B 46	1215	1175	B 81	2100	2060	B 126	3240	3200			
B 46½	1220	1180	B 82	2123	2083	B 128	3290	3250			
B 47	1240	1200	B 83	2140	2100	B 130	3342	3302			
B 48	1255	1215	B 83½	2160	2120	B 132	3390	3350			
B 48½	1265	1225	B 84	2174	2134	B 134	3444	3404			
B 49	1290	1250	B 85	2200	2160	B 136	3490	3450			
B 50	1315	1275	B 86	2240	2200	B 138	3545	3505			


Maximum production length: 15 500 mm L_i
Minimum order quantity:
Over 1800 mm =
21 belts for non standard lengths
63 belts for certain special constructions
Weight: ≈ 0.196 kg/m

Datum length L_d ≅ pitch length L_w/L_p Other sizes on request

Standard Range

optibelt VB Classical V-Belts

to BS 3790/DIN 2215/ISO 4184

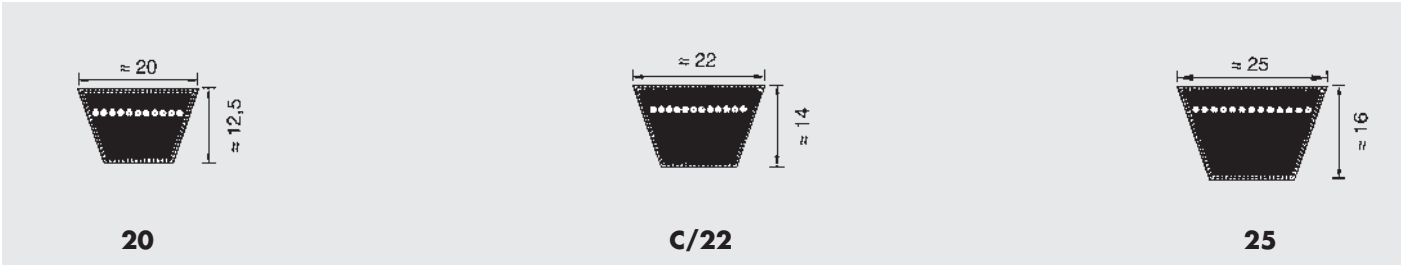


Section 20		Section C/22						Section 25	
Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)	Belt no.	Datum length ISO L _d (mm)	Inside length L _i (mm)	Datum length ISO L _d (mm)	Inside length L _i (mm)
950	900	C 43	1148	1090	C 102	2649	2591	1460	1400
1050	1000	C 47	1258	1200	C 104	2700	2642	1560	1500
1170	1120	C 48	1273	1215	C 105	2725	2667	1660	1600
1230	1180	C 49	1308	1250	C 106	2750	2692	1760	1700
1300	1250	C 51	1353	1295	C 108	2808	2750	1860	1800
1370	1320	C 52	1378	1320	C 110	2858	2800	1960	1900
1450	1400	C 53	1408	1350	C 112	2903	2845	2060	2000
1550	1500	C 54	1433	1375	C 114	2954	2896	2180	2120
1650	1600	C 55	1458	1450	C 115	2979	2921	2300	2240
1750	1700	C 56	1483	1425	C 116	3008	2950	2420	2360
1850	1800	C 57	1508	1450	C 117	3023	2965	2560	2500
1950	1900	C 58	1533	1475	C 118	3058	3000	2710	2650
2050	2000	C 59	1558	1500	C 120	3106	3048	2760	2700
2170	2120	C 60	1582	1524	C 122	3157	3099	2860	2800
2290	2240	C 61	1608	1550	C 124	3208	3150	3060	3000
2410	2360	C 62	1632	1574	C 126	3258	3200	3210	3150
2550	2500	C 63	1658	1600	C 128	3308	3250	3410	3350
2700	2650	C 65	1708	1650	C 130	3360	3302	3610	3550
2850	2800	C 66	1734	1676	C 132	3408	3350	3810	3750
3050	3000	C 67	1758	1700	C 134	3462	3404	4060	4000
3200	3150	C 68	1785	1727	C 136	3508	3450	4310	4250
3400	3350	C 69	1808	1750	C 138	3563	3505	4560	4500
3600	3550	C 70	1836	1778	C 140	3608	3550	4810	4750
3800	3750	C 71	1858	1800	C 142	3665	3607	5060	5000
4050	4000	C 72	1887	1829	C 144	3716	3658	5360	5300
4550	4500	C 73	1912	1854	C 146	3758	3700	5660	5600
5050	5000	C 74	1938	1880	C 148	3808	3750	6060	6000
6050	6000	C 75	1958	1900	C 150	3868	3810	6360	6300
		C 76	1988	1930	C 158	4058	4000	6760	6700
		C 77	2014	1956	C 162	4158	4100	7160	7100
		C 78	2039	1981	C 166	4274	4216	7560	7500
		C 79	2058	2000	C 167	4308	4250	8060	8000
		C 80	2090	2032	C 168	4325	4267	8560	8500
		C 81	2118	2060	C 170	4376	4318	9060	9000
		C 82	2141	2083	C 173	4452	4394		
		C 83	2166	2108	C 175	4503	4445		
		C 83½	2178	2120	C 177	4558	4500		
		C 84	2192	2134	C 180	4630	4572		
		C 85	2217	2159	C 187	4808	4750		
		C 86	2242	2184	C 190	4884	4826		
		C 87	2268	2210	C 195	5011	4953		
		C 88	2298	2240	C 197	5058	5000		
		C 89	2319	2261	C 208	5358	5300		
		C 90	2344	2286	C 210	5392	5334		
		C 92	2395	2337	C 220	5658	5600		
		C 93	2418	2360	C 225	5773	5715		
		C 94	2446	2388	C 236	6058	6000		
		C 95	2471	2413	C 240	6154	6096		
		C 96	2496	2438	C 248	6358	6300		
		C 96½	2508	2450	C 264	6758	6700		
		C 97	2522	2464	C 270	6916	6858		
		C 98	2558	2500	C 280	7158	7100		
		C 99	2583	2525	C 295	7558	7500		
		C 100	2598	2540	C 300	7678	7620		
		C 101	2618	2560	C 315	8058	8000		
Maximum production length: 10000 mm L _i Minimum order quantity: Over 1800 mm = 18 belts for non standard lengths 54 belts for certain special constructions Weight: ≈ 0.266 kg/m		Maximum standard production length: 18000 mm L _i Over 18000 to 19000 mm on request Minimum order quantity: Over 1800 mm = 16 belts for non standard lengths 48 belts for certain special constructions Weight: ≈ 0.324 kg/m						Maximum standard production length: 18000 mm L _i Over 18000 to 19000 mm on request Minimum order quantity: Over 1800 mm = 14 belts for non standard lengths 42 belts for certain special constructions Weight: ≈ 0.420 kg/m	

Datum length L_d ≅ pitch length L_w/L_p Other sizes on request

Standard Range

optibelt VB Classical V-Belts

to BS 3790/DIN 2215/ISO 4184

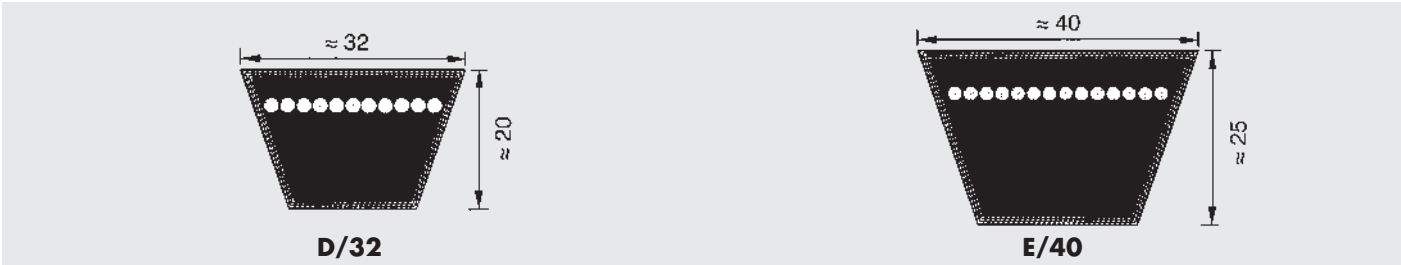

Section D/32			Section E/40		
Belt no.	Datum length ISO L _d (mm)	Inside length L _i	Belt no.	Datum length ISO L _d (mm)	Inside length L _i
D 79	2075	2000	E 118	3080	3000
D 98	2575	2500	E 158	4080	4000
D 104	2725	2650	E 197	5080	5000
D 110	2875	2800	E 220	5680	5600
D 118	3075	3000	E 236	6080	6000
D 120	3123	3048	E 248	6380	6300
D 124	3225	3150	E 280	7180	7100
D 128	3326	3251	E 295	7580	7500
D 132	3425	3350	E 315	8080	8000
D 135	3500	3425	E 354	9080	9000
D 136	3529	3454	E 394	10080	10000
D 140	3625	3550	E 441	11280	11200
D 144	3733	3658	E 492	12580	12500
D 148	3825	3750			
D 154	4000	3925			
D 158	4075	4000			
D 162	4190	4115			
D 167	4325	4250			
D 173	4469	4394			
D 177	4575	4500			
D 180	4647	4572			
D 187	4825	4750			
D 195	5028	4953			
D 197	5075	5000			
D 208	5375	5300			
D 210	5409	5334			
D 220	5675	5600			
D 225	5790	5715			
D 236	6075	6000			
D 240	6171	6096			
D 248	6375	6300			
D 264	6775	6700			
D 270	6933	6858			
D 280	7175	7100			
D 295	7575	7500			
D 300	7695	7620			
D 315	8075	8000			
D 330	8457	8382			
D 335	8575	8500			
D 354	9075	9000			
D 374	9575	9500			
D 394	10075	10000			
D 441	11275	11200			

Maximum standard production length: 18 000 mm L_i
Over 18 000 to 19 000 mm on request
Minimum order quantity:
Over 2000 mm =
11 belts for non standard lengths
33 belts for certain special constructions
Weight: ≈ 0.668 kg/m

Maximum production length: 19 000 mm L_i
Minimum order quantity for **all** sizes:
7 belts
21 belts for certain special constructions
Weight: ≈ 0.958 kg/m


Datum length L_d ≙ pitch length L_w/L_p Other sizes on request

Standard Range

optibelt *Super X-POWER M=5* Wedge Belts

- Raw Edge, Moulded Cogged -

BS 3790/DIN 7753 Part 1 / ISO 4184 und RMA/MPTA

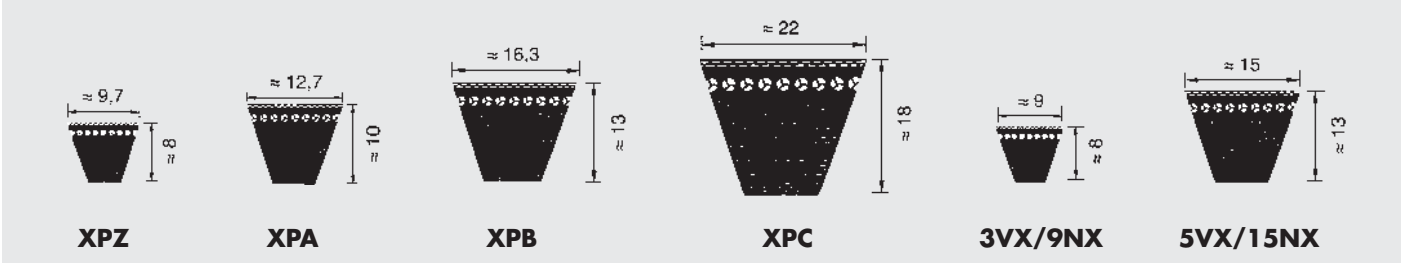


Section XPZ			Section XPA		Section XPB	Section XPC	Section 3VX/9NX		Section 5VX/15NX	
Datum length ISO L _d (mm)			Datum length ISO L _d (mm)		Datum length ISO L _d (mm)	Datum length ISO L _d (mm)	Designation	Designation L _a (outside length mm)	Designation	Designation L _a (outside length mm)
587	1187	2690	732	1500	1250	2000	3VX 250	9NX 635	5VX 500	15NX 1270
612	1202	2800	757	1507	1320	2120	3VX 265	9NX 673	5VX 530	15NX 1346
630	1212	2840	782	1532	1400	2240	3VX 280	9NX 711	5VX 560	15NX 1422
637	1237	3000	800	1557	1500	2360	3VX 300	9NX 762	5VX 600	15NX 1524
662	1250	3150	807	1582	1600	2500	3VX 315	9NX 800	5VX 630	15NX 1600
670	1262	3350	832	1600	1700	2650	3VX 335	9NX 851	5VX 670	15NX 1702
687	1287	3550	850	1607	1800	2800	3VX 355	9NX 902	5VX 710	15NX 1803
710	1312		857	1632	1900	3000	3VX 375	9NX 952	5VX 750	15NX 1905
730	1320		882	1700	2000	3150	3VX 400	9NX 1016	5VX 800	15NX 2032
737	1337		900	1757	2120	3350	3VX 425	9NX 1079	5VX 850	15NX 2159
750	1362		907	1800	2240	3550	3VX 450	9NX 1143	5VX 900	15NX 2286
762	1387		932	1882	2360		3VX 475	9NX 1206	5VX 950	15NX 2413
772	1400		950	1900	2500		3VX 500	9NX 1270	5VX 1000	15NX 2540
787	1412		957	2000	2650		3VX 530	9NX 1346	5VX 1060	15NX 2692
800	1437		982	2120	2800		3VX 560	9NX 1422	5VX 1120	15NX 2845
812	1462		1000	2240	3000		3VX 600	9NX 1524	5VX 1180	15NX 2997
825	1487		1007	2360	3150		3VX 630	9NX 1600	5VX 1250	15NX 3175
837	1500		1030	2500	3350		3VX 670	9NX 1702	5VX 1320	15NX 3353
850	1512		1060	2650	3550		3VX 710	9NX 1803	5VX 1400	15NX 3556
862	1537		1082	2800			3VX 750	9NX 1905		
875	1562		1107	3000			3VX 800	9NX 2032		
887	1587		1120	3150			3VX 850	9NX 2159		
900	1600		1132	3350			3VX 900	9NX 2286		
912	1612		1157	3550			3VX 950	9NX 2413		
925	1662		1180				3VX 1000	9NX 2540		
937	1700		1207				3VX 1060	9NX 2692		
950	1750		1232				3VX 1120	9NX 2845		
962	1762		1250				3VX 1180	9NX 2997		
987	1800		1257				3VX 1250	9NX 3175		
1000	1850		1272				3VX 1320	9NX 3353		
1012	1900		1282				3VX 1400	9NX 3556		
1037	1950		1307							
1060	2000		1320							
1077	2120		1332							
1087	2150		1357							
1112	2240		1382							
1120	2360		1400							
1137	2500		1432							
1162	2540		1457							
1180	2650		1482							
Weight: ≈ 0.065 kg/m			Weight: ≈ 0.096 kg/m		Weight: ≈ 0.183 kg/m	Weight: ≈ 0.340 kg/m	Weight: ≈ 0.065 kg/m		Weight: ≈ 0.183 kg/m	

Datum length L_d ≙ pitch length L_w/L_p Other sizes on request

Standard Range

optibelt *SUPER TX M=5* V-Belts

- Raw Edge, Moulded Cogged - to BS 3790/DIN 2215/ISO 4184

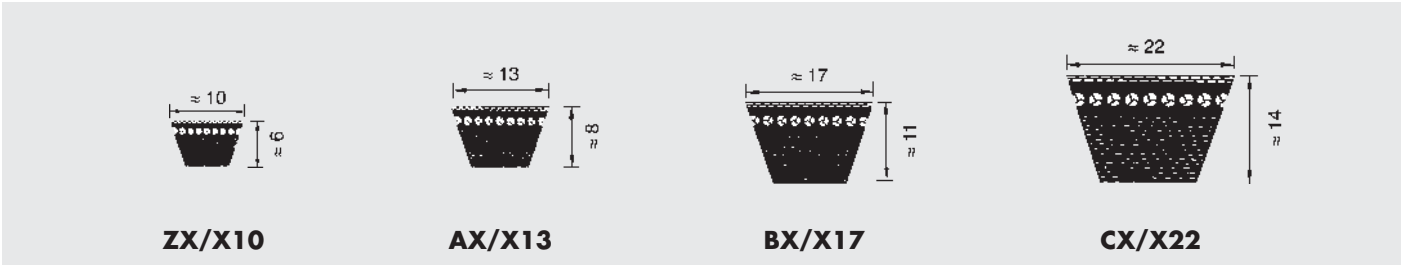


Section ZX/X10		Section AX/X13		Section BX/X17		Section CX/X22	
Belt no.	Datum length ISO L _d (mm)	Belt no.	Datum length ISO L _d (mm)	Belt no.	Datum length ISO L _d (mm)	Belt no.	Datum length ISO L _d (mm)
ZX 23	597	AX 23	605	BX 23	610	CX 39	1058*
ZX 24	622	AX 23½	630	BX 25	670	CX 43	1148*
ZX 25	652	AX 24	640	BX 26	690	CX 49	1308*
ZX 26	672	AX 25	660	BX 28	750	CX 52	1378*
ZX 27	692	AX 26½	700	BX 29	765	CX 55	1458*
ZX 28	732	AX 27	716	BX 30	790	CX 59	1558*
ZX 29	752	AX 28	740	BX 31	815	CX 62	1632*
ZX 29½	772	AX 29	760	BX 32	840	CX 67	1758*
ZX 31½	822	AX 30	797	BX 33	876	CX 68	1785*
ZX 32	842	AX 31	805	BX 34	890	CX 71	1858*
ZX 33	847	AX 32	843	BX 34½	915	CX 75	1958*
ZX 33½	872	AX 33	871	BX 35	929	CX 79	2058*
ZX 35	897	AX 34	880	BX 36	940	CX 81	2118*
ZX 36	922	AX 35	919	BX 37	965	CX 85	2217*
ZX 37	947	AX 35½	930	BX 38	1005	CX 88	2298*
ZX 38	972	AX 36	944	BX 39	1040	CX 90	2344*
ZX 40	1038*	AX 37	955	BX 40	1056	CX 93	2418*
ZX 42	1082*	AX 37½	980	BX 41	1080	CX 96	2496*
ZX 46½	1202*	AX 38	995	BX 42	1100	CX 98	2558*
ZX 52	1342*	AX 39	1030	BX 43	1130	CX 110	2858*
ZX 55	1422*	AX 40	1046	BX 44	1160	CX 118	3058*
ZX 59	1522*	AX 41½	1080	BX 45	1190	CX 124	3208*
		AX 42	1090	BX 45½	1203	CX 132	3408*
		AX 43	1130	BX 46	1215		
		AX 44	1150	BX 46½	1220		
		AX 45½	1180	BX 47	1240		
		AX 46	1198	BX 48	1255		
		AX 47	1230	BX 49	1290		
		AX 48	1250	BX 50	1315		
		AX 49	1280	BX 51	1340		
		AX 50	1300	BX 52	1360		
		AX 51	1330	BX 53	1390		
		AX 52	1350	BX 54	1412		
		AX 53	1380	BX 55	1440		
		AX 54	1405	BX 57	1490		
		AX 55	1430	BX 58	1513		
		AX 56	1452	BX 59	1540		
		AX 57	1480	BX 61	1590		
		AX 58	1505	BX 62	1615		
		AX 59	1530	BX 63	1640		
		AX 62	1605	BX 67	1740		
		AX 63	1630	BX 69	1790		
		AX 67	1730	BX 71	1840		
		AX 70	1805	BX 73	1890		
		AX 71	1830	BX 75	1940		
		AX 75	1930	BX 79	2040		
		AX 79	2030	BX 88	2280		
		AX 88	2270	BX 93	2400		
		AX 93	2390	BX 98	2540		
		AX 98	2530	BX 103	2656*		
		AX 104	2680*	BX 104	2690*		
		AX 110	2830*	BX 110	2840*		
		AX 118	3030*	BX 118	3040*		
		AX 124	3180*	BX 124	3190*		
		AX 132	3380*	BX 132	3390*		

Weight: ≈ 0.062 kg/m	Weight: ≈ 0.099 kg/m	Weight: ≈ 0.165 kg/m	Weight: ≈ 0.276 kg/m
Datum length $L_d \triangleq$ pitch length L_w/L_p Other sizes on request *Non stock items			

Standard Range

optibelt KB Kraftbands with Wedge Belts

to BS/DIN/ISO

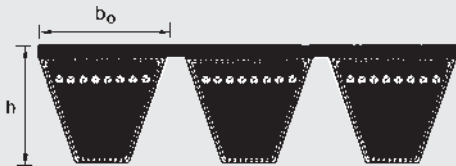


Section	SPZ	SPA	SPB	SPC
$b_o \approx$ (mm)	9.7	12.7	16.5	22.0
$h \approx$ (mm)	10.5	12.5	15.6	22.6

Section SPZ	Section SPA	Section SPB	Section SPC
Datum length ISO L_d (mm)	Datum length ISO L_d (mm)	Datum length ISO L_d (mm)	Datum length ISO L_d (mm)
1250	1250	2000	3000
1400	1400	2120	3150
1500	1500	2240	3350
1600	1600	2360	3550
1700	1700	2500	3750
1800	1800	2650	4000
1900	1900	2800	4250
2000	2000	3000	4500
2120	2120	3150	4750
2240	2240	3350	5000
2360	2360	3550	5300
2500	2500	3750	5600
2650	2650	4000	6000
2800	2800	4250	6300
3000	3000	4500	6700
3150	3150	4750	7100
3350	3350	5000	7500
3550	3550	5300	8000
	3750	5600	8500
	4000	6000	9000
	4250	6300	9500
	4500	6700	10000
		7100	10600
		7500	11200
		8000	11800
			12500
Maximum production length: 4500 mm L_d Non standard lengths from 1800 mm L_d Minimum order quantity for special lengths: 8 belts with 5 ribs or 10 belts with 4 ribs or 14 belts with 3 ribs or 21 belts with 2 ribs or a multiple thereof Weight: $\approx$ 0.120 kg/m per rib Minimum order quantities for Aramid belts on request	Maximum production length: 4500 mm L_d Non standard lengths from 1800 mm L_d Minimum order quantity for all sizes: 6 belts with 5 ribs or 8 belts with 4 ribs or 11 belts with 3 ribs or 16 belts with 2 ribs or a multiple thereof Weight: $\approx$ 0.166 kg/m per rib Minimum order quantities for Aramid belts on request	Maximum production length: 10000 mm L_d Non standard lengths from 2000 mm L_d Minimum order quantity for special lengths: 4 belts with 5 ribs or 5 belts with 4 ribs or 7 belts with 3 ribs or 11 belts with 2 ribs or a multiple thereof Weight: $\approx$ 0.261 kg/m per rib Minimum order quantities for Aramid belts on request	Maximum production length: 12500 mm L_d Non standard lengths from 3000 mm L_d Minimum order quantity for all sizes: 3 belts with 5 ribs or 4 belts with 4 ribs or 5 belts with 3 ribs or 8 belts with 2 ribs or a multiple thereof Weight: $\approx$ 0.555 kg/m per rib Minimum order quantities for Aramid belts on request

Standard Range

optibelt *KB* Kraftbands with Wedge Belts

to USA Standard RMA/MPTA

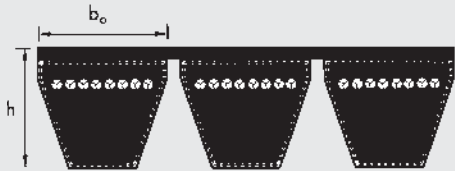

Section	3V/9J	5V/15J	8V/25J
b _o ≈ (mm)	9.0	15.0	25.0
h ≈ (mm)	9.9	15.1	25.5

Section 3V/9J		Section 5V/15J		Section 8V/25J	
Designation	Designation (outside length mm) L _a	Designation	Designation (outside length mm) L _a	Designation	Designation (outside length mm) L _a
3V 500	9J 1270	5V 560	15J 1422	8V 1000	25J 2540
3V 530	9J 1346	5V 600	15J 1524	8V 1060	25J 2692
3V 560	9J 1422	5V 630	15J 1600	8V 1120	25J 2845
3V 600	9J 1524	5V 670	15J 1702	8V 1180	25J 2997
3V 630	9J 1600	5V 710	15J 1803	8V 1250	25J 3175
3V 670	9J 1702	5V 750	15J 1905	8V 1320	25J 3353
3V 710	9J 1803	5V 800	15J 2032	8V 1400	25J 3556
3V 750	9J 1905	5V 850	15J 2159	8V 1500	25J 3810
3V 800	9J 2032	5V 900	15J 2286	8V 1600	25J 4064
3V 850	9J 2159	5V 950	15J 2413	8V 1700	25J 4318
3V 900	9J 2286	5V 1000	15J 2540	8V 1800	25J 4572
3V 950	9J 2413	5V 1060	15J 2692	8V 1900	25J 4826
3V 1000	9J 2540	5V 1120	15J 2845	8V 2000	25J 5080
3V 1060	9J 2692	5V 1180	15J 2997	8V 2120	25J 5385
3V 1120	9J 2845	5V 1250	15J 3175	8V 2240	25J 5690
3V 1180	9J 2997	5V 1320	15J 3353	8V 2360	25J 5994
3V 1250	9J 3175	5V 1400	15J 3556	8V 2500	25J 6350
3V 1320	9J 3353	5V 1500	15J 3810	8V 2650	25J 6731
3V 1400	9J 3556	5V 1600	15J 4064	8V 2800	25J 7112
		5V 1700	15J 4318	8V 3000	25J 7620
		5V 1800	15J 4572	8V 3150	25J 8001
		5V 1900	15J 4826	8V 3350	25J 8509
		5V 2000	15J 5080	8V 3550	25J 9017
		5V 2120	15J 5385	8V 3750	25J 9525
		5V 2240	15J 5690	8V 4000	25J 10160
		5V 2360	15J 5994	8V 4250	25J 10795
		5V 2500	15J 6350	8V 4500	25J 11430
		5V 2650	15J 6731	8V 4750	25J 12065
		5V 2800	15J 7112		
		5V 3000	15J 7620		
		5V 3150	15J 8001		
		5V 3350	15J 8509		
		5V 3550	15J 9017		
Maximum production length: 4250 mm L _a Non standard lengths from 1800 mm L _a Minimum order quantity for special lengths: 9 belts with 5 ribs or 12 belts with 4 ribs or 16 belts with 3 ribs or 24 belts with 2 ribs or a multiple thereof Weight: ≈ 0.102 kg/m per rib Minimum order quantities for Aramid belts on request		Maximum production length: 10000 mm L _a Non standard lengths from 1800 mm L _a Minimum order quantity for special lengths: 6 belts with 5 ribs or 7 belts with 4 ribs or 10 belts with 3 ribs or 15 belts with 2 ribs or a multiple thereof Weight: ≈ 0.252 kg/m per rib Minimum order quantities for Aramid belts on request		Maximum standard length: 15000 mm L _a Over 15000 to 18000 mm on request Non standard lengths from 2540 mm L _a Minimum order quantity for all sizes: 2 belts with 5 ribs or 2 belts with 4 ribs or 3 belts with 3 ribs or a multiple thereof Weight: ≈ 0.693 kg/m per rib Minimum order quantities for Aramid belts on request	

Standard Range

optibelt *KBX* Kraftbands – Raw Edge, Moulded Cogged –

to USA Standard RMA/MPTA




Section	3VX/9JX	5VX/15JX
$b_o \approx$ (mm)	9.0	15.0
$h \approx$ (mm)	9.9	15.1

Section 3VX/9JX		Section 5VX/15JX	
Designation	Designation L _a (outside length mm)	Designation	Designation L _a (outside length mm)
3VX 500	9JX 1270	5VX 500	15JX 1270
3VX 530	9JX 1346	5VX 530	15JX 1346
3VX 560	9JX 1422	5VX 560	15JX 1422
3VX 600	9JX 1524	5VX 600	15JX 1524
3VX 630	9JX 1600	5VX 630	15JX 1600
3VX 670	9JX 1702	5VX 670	15JX 1702
3VX 710	9JX 1803	5VX 710	15JX 1803
3VX 750	9JX 1905	5VX 750	15JX 1905
3VX 800	9JX 2032	5VX 800	15JX 2032
3VX 850	9JX 2159	5VX 850	15JX 2159
3VX 900	9JX 2286	5VX 900	15JX 2286
3VX 950	9JX 2413	5VX 950	15JX 2413
3VX 1000	9JX 2540	5VX 1000	15JX 2540
3VX 1060	9JX 2692	5VX 1060	15JX 2692
3VX 1120	9JX 2845	5VX 1120	15JX 2845
3VX 1180	9JX 2997	5VX 1180	15JX 2997
3VX 1250	9JX 3175	5VX 1250	15JX 3175
3VX 1320	9JX 3353	5VX 1320	15JX 3353
3VX 1400	9JX 3556	5VX 1400	15JX 3556
Minimum order quantity on request			
Kraftbands with the sections XPZ, XPA, XPB, AX/HAX and BX/HBX can be supplied on request.			
Weight: ≈ 0.117 kg/m per rib		Weight: ≈ 0.241 kg/m per rib	
Other sizes on request			

Standard Range

optibelt *KB* Kraftbands with Classical V-Belts

to BS 3790/DIN/ISO, ASAE

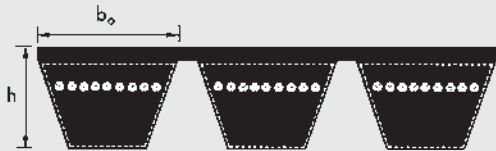

Section	A/HA	B/HB	C/HC	D/HD
$b_o \approx$ (mm)	13.0	17.0	22.0	32.0
$h \approx$ (mm)	9.9	13.0	16.2	22.4


Section A/HA			Section B/HB						Section C/HC			Section D/HD		
(Section A) Inside length		(Section HA) Outside length	(Section B) Inside length		(Section HB) Outside length	(Section B) Inside length		(Section HB) Outside length	(Section C) Inside length		(Section HC) Outside length	(Section D) Inside length		(Section HD) Outside length
Belt no.	L _i (mm)	L _a (mm)	Belt no.	L _i (mm)	L _a (mm)	Belt no.	L _i (mm)	L _a (mm)	Belt no.	L _i (mm)	L _a (mm)	Belt no.	L _i (mm)	L _a (mm)
47	1200	1236	47	1200	1262	158	4000	4062	90	2286	2361	98	2500	2611
51	1300	1336	51	1300	1362	167	4250	4312	98	2500	2575	110	2800	2911
56	1422	1458	55	1400	1462	177	4500	4562	108	2750	2825	120	3048	3159
57	1450	1486	59	1500	1562	187	4750	4812	120	3048	3123	128	3250	3361
59	1500	1536	61	1550	1612	197	5000	5062	128	3250	3325	144	3658	3769
64	1625	1661	63	1600	1662	208	5300	5362	140	3550	3625	158	4000	4111
67	1700	1736	64	1625	1687	220	5600	5662	146	3700	3775	162	4115	4226
71	1800	1836	67	1700	1762				151	3850	3925	173	4394	4505
75	1900	1936	71	1800	1862				167	4250	4325	180	4572	4683
79	2000	2036	73	1850	1912				177	4500	4575	195	4953	5064
88	2240	2276	75	1900	1962				187	4750	4825	210	5334	5445
98	2500	2536	79	2000	2062				197	5000	5075	225	5715	5826
100	2540	2576	83	2100	2162				208	5300	5375	240	6096	6207
104	2650	2686	88	2240	2302				220	5600	5675	255	6477	6588
112	2845	2881	91	2300	2362				236	6000	6075	270	6858	6969
120	3048	3084	94½	2400	2462				248	6300	6375	285	7239	7350
128	3250	3286	98	2500	2562							300	7620	7731
144	3658	3694	102	2600	2662							315	8000	8111
158	4000	4036	106	2700	2762							330	8382	8493
167	4250	4286	112	2845	2907							345	8763	8874
187	4750	4786	118	3000	3062							360	9144	9255
			120	3048	3110							390	9906	10017
			128	3250	3312							420	10668	10779
			132	3350	3412							450	11430	11541
			140	3550	3612							480	12200	12311
			146	3700	3762							540	13716	13827
			148	3750	3812							600	15240	15351
												660	16764	16875
												700	17780	17891
Maximum production length: 8000 mm L _i Non standard lengths from 1800 mm Minimum order quantity for non listed sizes: 1200 to 2000 mm 6 belts with 5 ribs or 8 belts with 4 ribs or 10 belts with 3 ribs or 16 belts with 2 ribs or a multiple thereof 2001 to 8000 mm 6 belts with 5 ribs or 8 belts with 4 ribs or 11 belts with 3 ribs or 16 belts with 2 ribs or a multiple thereof Weight: ≈ 0.163 kg/m per rib Minimum order quantities for Aramid belts on request			Maximum production length: 10000 mm L _i Non standard lengths from 1800 mm Minimum order quantity for non listed sizes: 5 belts with 5 ribs or 6 belts with 4 ribs or 9 belts with 3 ribs or 13 belts with 2 ribs or a multiple thereof Weight: ≈ 0.266 kg/m per rib Minimum order quantities for Aramid belts on request						Max. production length: 12000 mm L _i Non standard lengths from 2286 mm Minimum order quantity for special lengths: 2286 to 10000 mm 4 belts with 5 ribs or 5 belts with 4 ribs or 6 belts with 3 ribs or 10 belts with 2 ribs or a multiple thereof 10001 to 12000 mm 3 belts with 5 ribs or 4 belts with 4 ribs or 5 belts with 3 ribs or 8 belts with 2 ribs or a multiple thereof Weight: ≈ 0.447 kg/m per rib Minimum order quantities for Aramid belts on request.			Max. production length: 16000 mm L _i Non standard lengths from 2500 mm Minimum order quantities for all sizes: 2 belts with 5 ribs or 2 belts with 4 ribs or 3 belts with 3 ribs or 5 belts with 2 ribs or a multiple thereof Weight: ≈ 0.798 kg/m per rib Minimum order quantities for Aramid belts on request.		

Other sizes on request

Standard Range

optibelt *RED POWER II* Kraftbands

with High Performance Wedge Belts BS/DIN/ISO

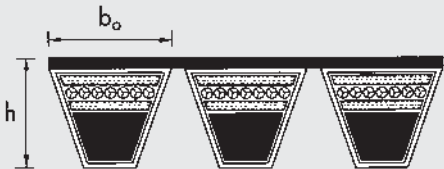

Section	SPB	SPC
$b_o \approx$ (mm)	16.5	22.0
$h \approx$ (mm)	15.6	22.6

Section SPB	Section SPC
Datum length ISO L_d (mm)	Datum length ISO L_d (mm)
2000	3000
2120	3150
2240	3350
2360	3550
2500	3750
2650	4000
2800	4250
3000	4500
3150	4750
3350	5000
3550	5300
3750	5600
4000	6000
4250	6300
4500	6700
4750	7100
5000	7500
5300	8000
5600	8500
6000	9000
6300	9500
6700	10000
7100	
7500	
8000	
Maximum production length: 8000 mm L_d	Maximum production length: 10000 mm L_d
Non standard lengths on request	Non standard lengths on request
Weight: ≈ 0.261 kg/m per rib	Weight: ≈ 0.555 kg/m per rib

Standard Range

optibelt *RED POWER II* Kraftbands

with High Performance Wedge Belts USA Standard RMA/MPTA




Section	3V/9J	5V/15J	8V/25J
$b_o \approx$ (mm)	9.0	15.0	25.0
$h \approx$ (mm)	9.9	15.1	25.5

Section 3V/9J		Section 5V/15J		Section 8V/25J	
Designation	Designation (outside length mm) L _a	Designation	Designation (outside length mm) L _a	Designation	Designation (outside length mm) L _a
3V 500	9J 1270	5V 560	15J 1422	8V 1000	25J 2540
3V 530	9J 1346	5V 600	15J 1524	8V 1060	25J 2692
3V 560	9J 1422	5V 630	15J 1600	8V 1120	25J 2845
3V 600	9J 1524	5V 670	15J 1702	8V 1180	25J 2997
3V 630	9J 1600	5V 710	15J 1803	8V 1250	25J 3175
3V 670	9J 1702	5V 750	15J 1905	8V 1320	25J 3353
3V 710	9J 1803	5V 800	15J 2032	8V 1400	25J 3556
3V 750	9J 1905	5V 850	15J 2159	8V 1500	25J 3810
3V 800	9J 2032	5V 900	15J 2286	8V 1600	25J 4064
3V 850	9J 2159	5V 950	15J 2413	8V 1700	25J 4318
3V 900	9J 2286	5V 1000	15J 2540	8V 1800	25J 4572
3V 950	9J 2413	5V 1060	15J 2692	8V 1900	25J 4826
3V 1000	9J 2540	5V 1120	15J 2845	8V 2000	25J 5080
3V 1060	9J 2692	5V 1180	15J 2997	8V 2120	25J 5385
3V 1120	9J 2845	5V 1250	15J 3175	8V 2240	25J 5690
3V 1180	9J 2997	5V 1320	15J 3353	8V 2360	25J 5994
3V 1250	9J 3175	5V 1400	15J 3556	8V 2500	25J 6350
3V 1320	9J 3353	5V 1500	15J 3810	8V 2650	25J 6731
3V 1400	9J 3556	5V 1600	15J 4064	8V 2800	25J 7112
		5V 1700	15J 4318	8V 3000	25J 7620
		5V 1800	15J 4572	8V 3150	25J 8001
		5V 1900	15J 4826	8V 3350	25J 8509
		5V 2000	15J 5080	8V 3550	25J 9017
		5V 2120	15J 5385	8V 3750	25J 9525
		5V 2240	15J 5690	8V 4000	25J 10160
		5V 2360	15J 5994	8V 4250	25J 10795
		5V 2500	15J 6350	8V 4500	25J 11430
		5V 2650	15J 6731	8V 4750	25J 12065
		5V 2800	15J 7112		
		5V 3000	15J 7620		
		5V 3150	15J 8001		
Maximum production length: 4000 mm L _a		Maximum production length: 9525 mm L _a		Maximum production length: 12065 mm L _a	
Non standard lengths on request		Non standard lengths on request		Non standard lengths on request	
Weight: ≈ 0.122 kg/m per rib		Weight: ≈ 0.252 kg/m per rib		Weight: ≈ 0.693 kg/m per rib	

Standard Range

optibelt *SUPER VX* Variable Speed Belts – Raw Edge,
Moulded Cogged – DIN 7719/ISO 1604

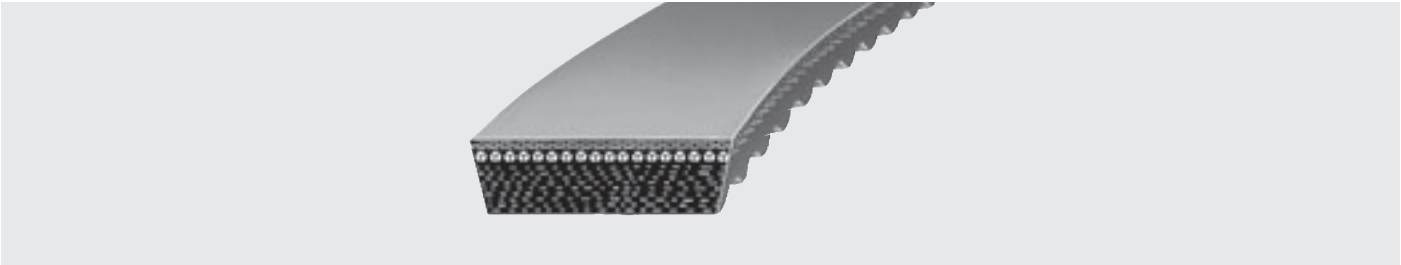

Section/ Inside length L _i (mm)	ISO designation (Datum length) L _d	Section/ Inside length L _i (mm)	ISO designation (Datum length) L _d	Section/ Inside length L _i (mm)	ISO designation (Datum length) L _d	Section/ Inside length L _i (mm)	ISO designation (Datum length) L _d	Section/ Inside length L _i (mm)	ISO designation (Datum length) L _d
13 x 5		26 x 8		32 x 10		47 x 13		70 x 18	
468		655	W 25 690	750	W 31,5 800	1000		1600	
500		672	W 25 710	790	W 31,5 840	1060		1700	
		710	W 25 750	820	W 31,5 870	1120		1800	
17 x 5		750	W 25 790	850	W 31,5 900	1180		1900	
426	W 16 450	762	W 25 800	900	W 31,5 950	1250		2000	
476	W 16 500	800	W 25 840	950	W 31,5 1000	1320		2240	
536	W 16 560	862	W 25 900	1000	W 31,5 1050	1400		2500	
570	W 16 600	962	W 25 1000	1073	W 31,5 1120	1500			
606	W 16 630	1082	W 25 1120	1120	W 31,5 1170	1600			
776	W 16 800			1180	W 31,5 1230	1700			
		28 x 8		1200	W 31,5 1250	1800			
21 x 6		600		1353	W 31,5 1400				
530	W 20 560	650				52 x 16			
600	W 20 630	700				1180	W 50 1250		
610	W 20 640	750		37 x 10		1250	W 50 1320		
675	W 20 710	800		660		1325	W 50 1400		
770	W 20 800	850		800		1400	W 50 1480		
870	W 20 900	900		850		1525	W 50 1600		
970	W 20 1000	950		900		1600	W 50 1680		
1220	W 20 1250	1000		950		1725	W 50 1800		
		1060		1000		1925	W 50 2000		
22 x 8		1120		1020		2165	W 50 2240		
485		1180		1060		2240	W 50 2320		
525		1250		1120					
565		1320		1180					
650		1400		1250		55 x 16			
700		1450		1320		1400			
750		1500		1400		1500			
800				1500		1600			
850		30 x 10		1600		1700			
900		650		1700		1800			
950		665		1800					
1000		700				65 x 20			
1060		800		41 x 13		1706	W 63 1800		
1185		850		925	W 40 990	1906	W 63 2000		
		875		1000	W 40 1060				
		900		1040	W 40 1100				
		950		1060	W 40 1120				
		1000		1120	W 40 1180				
		1035		1180	W 40 1240				
		1050		1190	W 40 1250				
		1120		1250	W 40 1310				
		1200		1340	W 40 1400				
		1320		1440	W 40 1500				
		1340		1600	W 40 1660				
		1500		1740	W 40 1800				
		1600		1940	W 40 2000				

Standard production data


Belt lengths up to 5000 mm L_i
Belt top widths up to 100 mm
Belt thicknesses 5 to 25 mm
24° angle for sections 13 x 5; 17 x 5.
30° angle for sections 52 x 16; 55 x 16; 65 x 20 and 70 x 18.
27° angle for all other sections. Sizes in accordance with USA Standard RMA/MTPA and variable speed belts with angles of 22° to 42° can be supplied on request. Minimum order quantities are necessary.

Tolerances

Length	± 1 % of the nominal belt length
Angle	± 1.5° of the nominal angle
Height	≤ 8 mm = ± 0.8 mm
	> 8 to 20 mm = ± 1.0 mm
	> 20 mm = ± 1.5 mm
Width	± 0.75 mm

Standard Range

optibelt *SUPER VX* Variable Speed Belts – Raw Edge,
Moulded Cogged – According to USA Standard RMA/MPTA

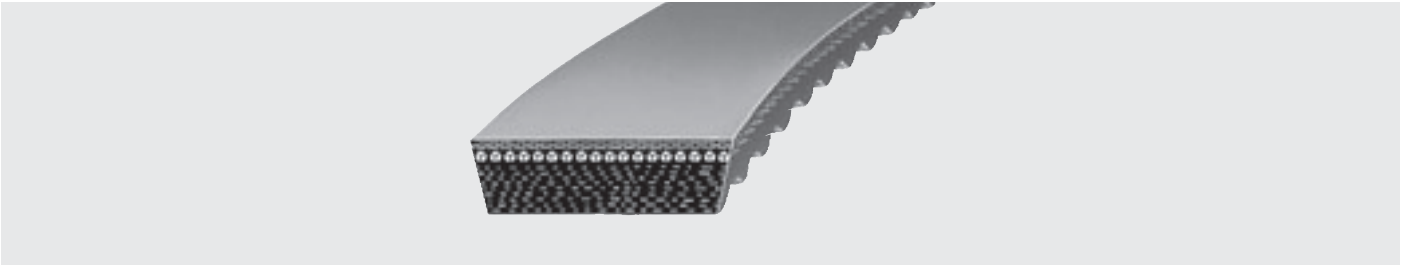

RMA/MPTA designation	RMA/MPTA designation	RMA/MPTA designation	RMA/MPTA designation
1422 V 235•	1922 V 751•	2530 V 934•	3230 V 630•
1422 V 240•	1922 V 756•	2530 V 990•	3230 V 670•
1422 V 270•			3230 V 710•
1422 V 290•	1926 V 250•	2830 V 337•	3230 V 723•
1422 V 300•	1926 V 275•	2830 V 363•	3230 V 750•
1422 V 330•	1926 V 290•	2830 V 366•	
1422 V 340•	1926 V 407•	2830 V 367•	3230 V 800•
1422 V 360•	1926 V 415•	2830 V 393•	3230 V 850•
1422 V 400•	1926 V 427•	2830 V 396•	
1422 V 420•		2830 V 422•	3432 V 450•
	2230 V 266•		3432 V 456•
1422 V 440•	2230 V 273•	2926 V 471•	3432 V 480•
1422 V 460•	2230 V 275•	2926 V 486•	3432 V 528•
1422 V 470•	2230 V 326•	2926 V 521•	3432 V 534•
1422 V 480•	2230 V 375•	2926 V 546•	
1422 V 540•		2926 V 574•	4036 V 541•
		2926 V 586•	4036 V 574•
1422 V 600•	2322 V 329•		
1422 V 660•	2322 V 347•	2926 V 606•	4430 V 530•
	2322 V 364•	2926 V 616•	4430 V 548•
1430 V 215•	2322 V 396•	2926 V 616•	4430 V 555•
	2322 V 421•	2926 V 636•	4430 V 560•
1922 V 277•		2926 V 646•	4430 V 570•
1922 V 282•	2322 V 434•	2926 V 666•	
1922 V 298•	2322 V 441•		4430 V 578•
1922 V 321•	2322 V 461•	2926 V 686•	4430 V 600•
1922 V 332•	2322 V 481•	2926 V 726•	4430 V 610•
	2322 V 486•	2926 V 750•	4430 V 630•
1922 V 338•		2926 V 776•	4430 V 652•
1922 V 363•	2322 V 521•	2926 V 786•	
1922 V 381•	2322 V 541•		4430 V 660•
1922 V 386•	2322 V 601•	3226 V 392•	4430 V 670•
1922 V 403•	2322 V 661•	3226 V 400•	4430 V 690•
	2322 V 681•	3226 V 433•	4430 V 700•
1922 V 426•		3226 V 450•	4430 V 710•
1922 V 443•	2322 V 701•	3226 V 505•	
1922 V 454•	2322 V 801•		4430 V 730•
1922 V 460•		3226 V 545•	4430 V 750•
1922 V 484•		3226 V 585•	4430 V 790•
	2426 V 353•	3226 V 603•	4430 V 800•
1922 V 526•	2426 V 363•	3226 V 650•	4430 V 850•
1922 V 544•		3226 V 663•	
1922 V 604•	2530 V 500•		4436 V 525•
1922 V 630•	2530 V 530•	3226 V 723•	4436 V 551•
1922 V 646•	2530 V 560•	3226 V 783•	4436 V 561•
	2530 V 600•	3226 V 843•	4436 V 576•
1922 V 666•	2530 V 630•		4436 V 646•
1922 V 686•		3230 V 419•	
1922 V 706•	2530 V 670•	3230 V 528•	4436 V 750•
1922 V 721•	2530 V 710•	3230 V 560•	
1922 V 726•	2530 V 750•	3230 V 585•	
	2530 V 790•	3230 V 600•	
	2530 V 800•		

Identification

14 = top width 14/16"

22 = pulley groove angle

V = variable speed


235 = datum length in 1/10"

• Standard products – minimum order quantity on request. Other sizes and double cogged variable speed belts on request.

Standard Range

optibelt *DK* Double Section V-Belts

to DIN/ISO, ASAE

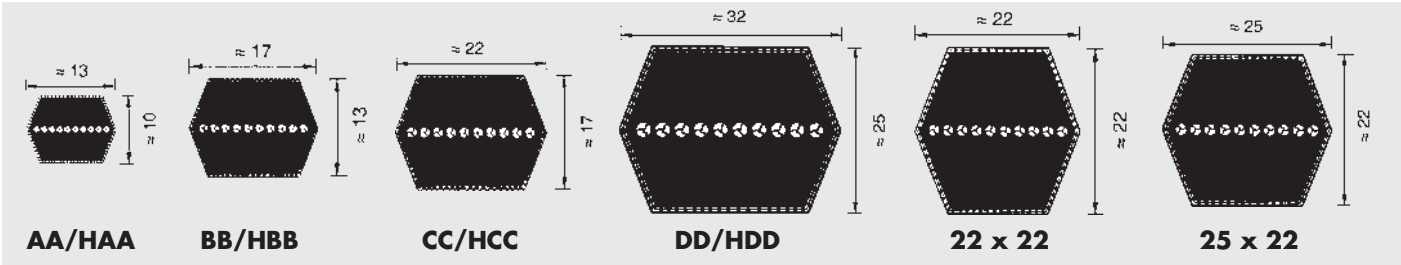

Section AA/HAA		Section BB/HBB				Section CC/HCC		Section DD/HDD	
Reference length (mm)	Belt no.	Reference length (mm)	Belt no.	Reference length (mm)	Belt no.	Reference length (mm)	Belt no.	Reference length (mm)	Belt no.
2000	77	1980	75	4040	156	2280	86	upon request	
2032	78	2180	83	4200	162	2500	94		
2370	91	2300	88	4470	173	2800	106		
2500	96	2370	90	4500	174	3200	122		
2650	102	2500	95	4750	184	3310	126	Weight: ≈ 0.935 kg/m	
2667	103	2540	97	5000	194	3765	144		
2800	108	2600	99	5639	221	4000	153		
3300	128	2650	101	6900	270	4216	162		
3920	152	2740	105			4300	165	Section 22 x 22	
		2800	107			4500	173		
		2850	109			5000	193		
		2920	112			5300	204		
		3000	115			5340	206	5180 5220 5850 6270	
		3030	116			5750	224		
		3150	121						
		3250	125						
		3280	126					Weight: ≈ 0.511 kg/m	
		3325	128						
		3390	131						
		3450	133						
		3500	135					Section 25 x 22	
		3550	137						
		3730	144						
		3750	145						
		4010	155					upon request	
Weight: ≈ 0.150 kg/m		Weight: ≈ 0.250 kg/m				Weight: ≈ 0.440 kg/m		Weight: ≈ 0.625 kg/m	

Non standard lengths and special constructions from:

- Section AA/HAA 1350 to 28 000 mm
- Section BB/HBB 1350 to 28 000 mm
- Section CC/HCC 1600 to 28 000 mm
- Section DD/HDD 3000 to 10 000 mm
- Section 22 x 22 3000 to 10 000 mm
- Section 25 x 22 1600 to 28 000 mm

Minimum order quantity for special lengths on request

Conversion factors from the belt number to the reference length:

- Section AA/HAA – Belt no. x 25.4 = mm + 53 mm
- Section BB/HBB – (up to Belt no. 210)
Belt no. x 25.4 = mm + 74 mm (over Belt no. 210)
Belt no. x 25.4 = mm + 36 mm
- Section CC/HCC – (up to Belt no. 210)
Belt no. x 25.4 = mm + 107 mm (over Belt no. 210)
Belt no. x 25.4 = mm + 56 mm
- Section DD/HDD – (up to Belt no. 210)
Belt no. x 25.4 = mm + 132 mm (over Belt no. 210)
Belt no. x 25.4 = mm + 69 mm

Standard Range

optibelt KS V-Grooved Pulleys – optibelt TB Taper Bushes

optibelt RE Variable Speed Pulleys



Power Transmission



Optibelt KS V-Grooved Pulleys

Optibelt KS V-grooved pulleys are available in pilot bored and for taper bush versions for all common belt sections.



Optibelt RE Variable Speed Pulleys

Optibelt RE variable speed pulleys allow for a multi-stage speed change between driving and driven pulley. They can be used with classical as well as variable speed belts.




Optibelt TB Taper Bushes

Optibelt TB taper bushes are used for simple installations of pulleys on shafts with or without keyway.

Standard Range

optibelt K5 V-Grooved Pulleys, Types

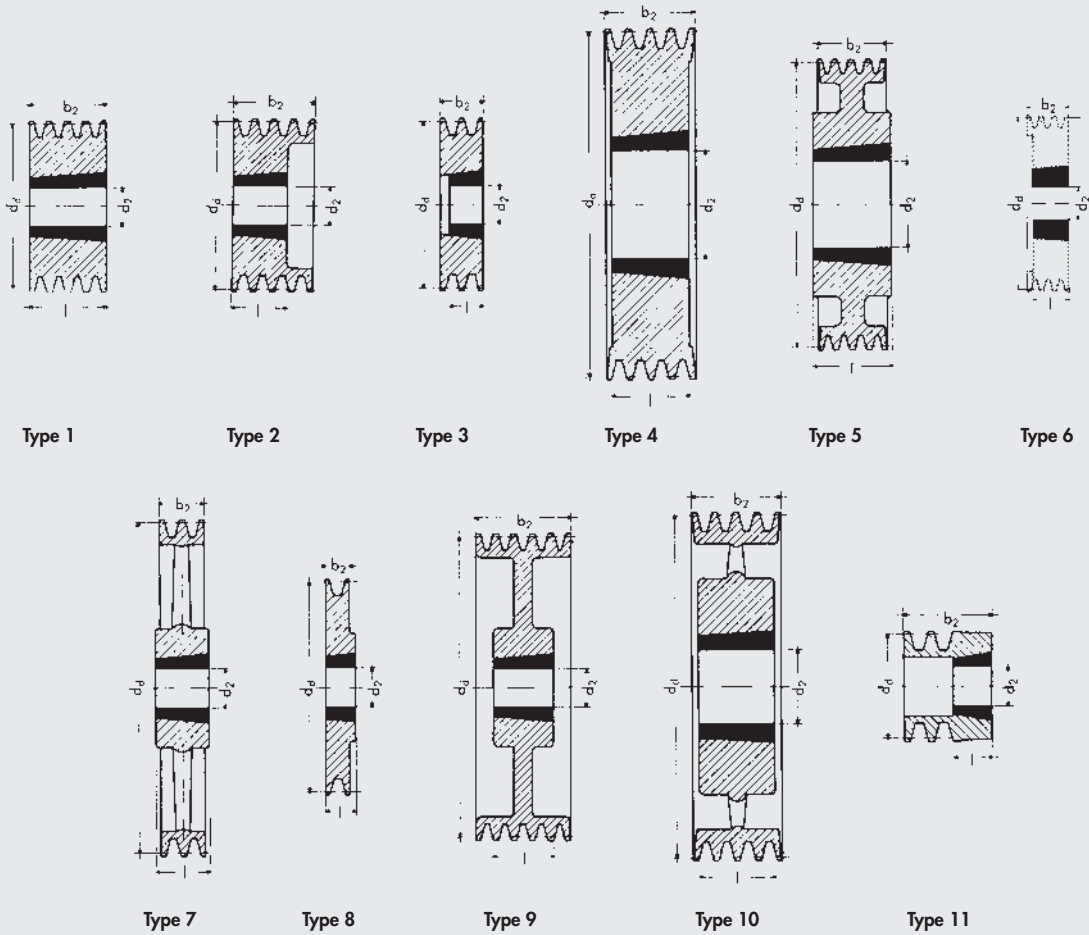

Rights to technical modifications reserved

Balancing

V-grooved pulleys are statically balanced in accordance with the guidelines in VDI 2060, as standard:

Quality level G 16; for dia. $d_d \geq 400$ mm at $n = 1500$ r.p.m.; for dia. $d_d > 400$ mm at $v = 30$ m/s.

The pulleys are balanced without keys on smooth balancing spindles. Machines whose runners are balanced with a keyway in the end of the shaft should be ordered as follows: "Balanced with pilot bore and empty keyway on smooth balancing spindles without key."


Balancing in one plane to quality level G 6.3 on request.

We recommend balancing in two planes to quality level G 6.3, or finer, when $v \geq 30$ m/s or the ratio of datum diameter to face width $d_d : b_2$ is < 4 at $v > 20$ m/s.

In such cases, the pulley operational speed must be stated.

Standard Range

optibelt Pulleys – Standards – Design Criteria – Types

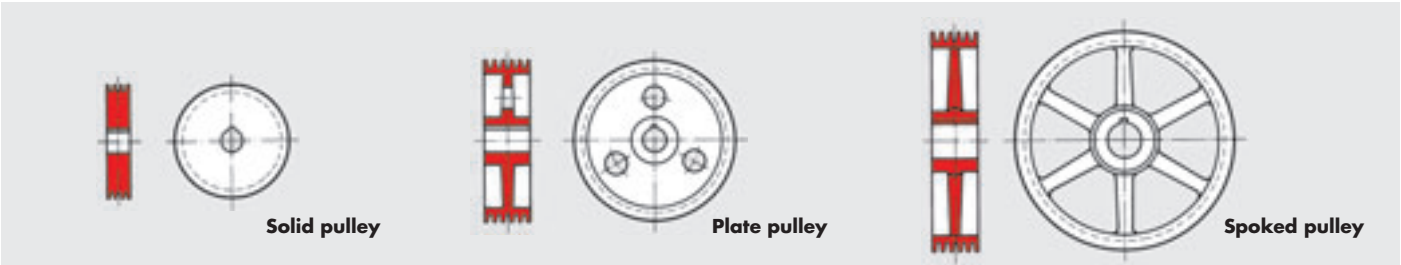

An essential component in V-belt drive systems is the V-belt pulley, or V-pulley as it is usually termed. These pulleys are predominantly made from GG 20 cast iron according to DIN 1691 and are available pilot bored, finished bored or with a taper bush.


The British and DIN Standards are based on the ISO Standard as are the standards of all industrialised countries.

ISO 4183 Grooved Pulleys for Classical V-Belts and Wedge Belts

V-belt pulleys with grooves for wedge belts to BS 3790 and DIN 7753 Part 1 are also suitable for classical V-belts with the same datum width b_d to BS 3790 and DIN 2215. These are known as dual duty pulleys.

Example

	Belt		Grooved pulleys
Section	SPZ	Z/10	SPZ – Z/10
Top width	$b_o \approx 9.7$	$b_o \approx 10$	$b_1 \approx 9.7$
Datum width	$b_d = 8.5$		$b_d = 8.5$
Belt height/ groove depth	$h \approx 8$	$h \approx 6$	$t_{min} = 11$



The following should be observed in the selection of pulleys:

- Use standard pulley diameters.
If design considerations make this impossible, a standard diameter should, as a minimum requirement, be chosen for the largest pulley in the drive.
- Do not select a pulley smaller than the minimum recommended size in the interest of belt service life and overall drive efficiency.
- If manufacturing your own pulleys, the overall shape and machining must conform to the relevant standards.
- Groove pulleys are generally balanced in one plane (statically), to quality level G 16 as in VDI 2060.

- Balancing in two planes (dynamically), quality level G 6.3, becomes necessary if:
1. $v > 30$ m/s or
2. the ratio of datum diameter to pulley face width $d_d : b_2 < 4$ at $v > 20$ m/s.

Note: The timely replacement of pulleys damaged by corrosion or erosion prevents premature failure of the belts.

Furthermore, it is essential that the belts should never run with their inside circumference in contact with the bottom of the groove as this can quickly lead to damage and premature failure (exception: special drives such as V-flat drives).


Deep Grooved Pulleys

Deep grooved pulleys are employed for special drive situations such as,

- the use of guide idlers,
- twist drives or
- drives subject to severe vibration.

The increased groove top width “ b_1 ” and depth “ t ” of deep grooved pulleys improves the running characteristics of the belt, particularly as it enters the groove. Belt turnover and run out are prevented.

Deep grooved pulleys are not suitable for use with kraftbands.

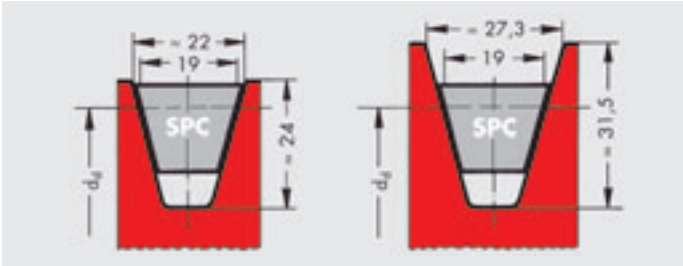

Standard Range

optibelt V-Grooved Pulleys DIN 2211 Page 1 for Wedge Belts and DIN 2217 Page 1 for Classical V-Belts or BS 3790 for Wedge and Classical Belts

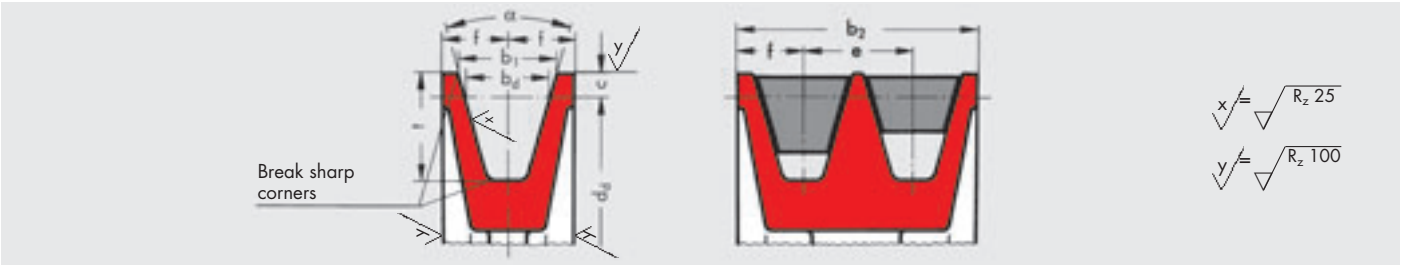


Table 9

V-belt section	ISO designation	–	Y*	–	Z*	A*	B*	–	C*	–	D	E
	BS 3790/DIN 2215 designation	5	6	8	10	13	17	20	22	25	32	40
Wedge belt section	BS 3790/DIN 7753 Part 1 and ISO designation	–	–	–	SPZ*	SPA*	SPB*	–	SPC*	–	–	–
b _d		4.2	5.3	6.7	8.5	11.0	14.0	17.0	19.0	21.0	27.0	32.0
b ₁ ≈		5.0	6.3	8.0	9.7	12.7	16.3	20.0	22.0	25.0	32.0	40.0
c		1.3	1.6	2.0	2.0	2.8	3.5	5.1	4.8	6.3	8.1	12.0
e		6 ± 0.3	8 ± 0.3	10 ± 0.3	12 ± 0.3	15 ± 0.3	19 ± 0.4	23 ± 0.4	25,5 ± 0.5	29 ± 0.5	37 ± 0.6	44,5 ± 0.7
f		5 ± 0.5	6 ± 0.5	7 ± 0.6	8 ± 0.6	10 ± 0.6	12,5 ± 0.8	15 ± 0.8	17 ± 1.0	19 ± 1.0	24 ± 2.0	29 ± 2.0
t	Endless belts	6 + 0.6 0	7 + 0.6 0	9 + 0.6 0	11 + 0.6 0	14 + 0.6 0	18 + 0.6 0	18 + 0.6 0	24 + 0.6 0	22 + 0.6 0	28 + 0.6 0	33 + 0.6 0
	Open-ended V-beltting DIN 2216							21 + 0.6 0		26 + 0.6 0	33 + 0.6 0	38 + 0.6 0
d _{d min}	V-belts	20	28	40	50	71	112	160	180	250	355	500
	Wedge belts	–	–	–	63	90	140	–	224	–	–	–
α		32° ± 1° d _d ≤ 50	32° ± 1° d _d ≤ 63	32° ± 1° d _d ≤ 75	–	–	–	–	–	–	–	–
		–	–	–	34° ± 1° d _d ≤ 80	34° ± 1° d _d ≤ 118	34° ± 1° d _d ≤ 190	34° ± 1° d _d ≤ 250	34° ± 1° d _d ≤ 315	34° ± 1° d _d ≤ 355	–	–
		36° ± 1° d _d > 50	36° ± 1° d _d > 63	36° ± 1° d _d > 75	–	–	–	–	–	–	36° ± 30' d _d ≤ 500	36° ± 30' d _d ≤ 630
		–	–	–	38° ± 1° d _d > 80	38° ± 1° d _d > 118	38° ± 1° d _d > 190	38° ± 1° d _d > 250	38° ± 30' d _d > 315	38° ± 30' d _d > 355	38° ± 30' d _d > 500	38° ± 30' d _d > 630
Face width for z number of grooves b ₂ = (z – 1) e + 2 f	1	10.0	12.0	14.0	16.0	20.0	25.0	30.0	34.0	38.0	48.0	58.0
	2	16.0	20.0	24.0	28.0	35.0	44.0	53.0	59.5	67.0	85.0	102.5
	3	22.0	28.0	34.0	40.0	50.0	63.0	76.0	85.0	96.0	122.0	147.0
	4	28.0	36.0	44.0	52.0	65.0	82.0	99.0	110.5	125.0	159.0	191.5
	5	34.0	44.0	54.0	64.0	80.0	101.0	122.0	136.0	154.0	196.0	236.0
	6	40.0	52.0	64.0	76.0	95.0	120.0	145.0	161.5	183.0	233.0	280.5
	7		60.0	74.0	88.0	110.0	139.0	168.0	187.0	212.0	270.0	325.0
	8			84.0	100.0	125.0	158.0	191.0	212.5	241.0	307.0	369.5
	9				112.0	140.0	177.0	214.0	238.0	270.0	344.0	414.0
	10					155.0	196.0	237.0	263.5	299.0	381.0	458.5
	11						215.0	260.0	289.0	328.0	418.0	503.0
	12							283.0	314.5	357.0	455.0	547.5

(Figures in mm)

* These V-pulleys also accept Optibelt SUPER TX M=S V-belts and Super X-POWER M=S wedge belts.

Standard Range

optibelt V-Grooved Pulleys DIN 2211 Page 1 for Wedge Belts
and DIN 2217 Page 1 for Classical V-Belts or BS 3790
for Wedge and Classical Belts



Table 10

V-belt section	ISO designation	—	Y	—	Z	A	B	—	C	—	D	E	Datum diameter d _d		Run out and side wobble tolerance
	BS 3790/DIN 2215 designation	5	6	8	10	13	17	20	22	25	32	40			
Wedge belt section	BS 3790/DIN 7753 Part 1 and ISO 4184 designation	—	—	—	SPZ	SPA	SPB	—	SPC	—	—	—	min.	max.	
Datum diameter d _d	20.0 22.0 25.0 28.0 31.5 35.5 40.0		28.0 31.5 35.5 40.0										20.0 22.0 25.0 28.0 31.5 35.5 40.0	20.4 22.4 25.4 28.4 32.0 36.1 40.6	0.2
	45.0 50.0 56.0 63.0	45.0 50.0 56.0 63.0	45 50 56 63	45 50 56 63 67		63 67							45.0 50.0 56.0 63.0 67.0	45.7 50.8 56.9 64.0 68.0	
	71.0 80.0	71.0 80.0	71 80	71 75 80 85 90 95 100 106	71 75 80 85 90 95 100 106		90 95 100 106						71.0 75.0 80.0 85.0 90.0 95.0 100.0 106.0	72.1 76.1 81.3 86.3 91.4 96.4 101.6 107.6	
		112.0 125.0	112 125 140 160	112 118 125 132 140 150 160	112 118 125 132 140 150 160	112 118 125 132 140 150 160				140° 150° 160°			112.0 118.0 125.0 132.0 140.0 150.0 160.0	113.8 119.9 127.0 134.1 142.2 152.4 162.6	0.3
			180 200	170 180 190 200 212 224 225 236 250	170 180 190 200 212 224 225 236 250	170 180 190 200 212 224 225 236 250 265	180 200 224	180 190 200 212 224 225 236 250 265			250		170.0 180.0 190.0 200.0 212.0 224.0 225.0 236.0 250.0 265.0	172.7 182.9 193.0 203.2 215.4 227.6 228.6 239.8 254.0 269.0	0.4
				280 300 315 335 355 400	280 300 315 335 355 400 425	280 300 315 335 355 375 400 425	280 315 355 400	280 300 315 335 355 375 400 425		280 315 355 400	355 400		280.0 300.0 315.0 335.0 355.0 375.0 400.0 425.0	284.5 304.8 320.0 340.0 360.7 380.7 406.4 431.4	0.5
				450 500 560 630	450 500 560 630	450 500 560 630	450 500 560 630	450 475 500 560 630		450 500 560 630	450 500 560 630		450.0 475.0 500.0 560.0 630.0	457.2 482.2 508.0 569.0 640.1	0.6
				710	710 800 900 1000	710 800 900 1000	710 800 900 1000	710 800 900 1000		710 800 900 1000	710 800 900 1000	710 800 900 1000	710.0 800.0 900.0 1000.0	721.4 812.8 914.4 1016.0	0.8
									1120 1250 1400 1600	1120 1250 1400 1600	1120 1250 1400 1600	1120 1250 1400 1600	1120.0 1250.0 1400.0 1600.0	1137.9 1270.0 1422.4 1625.6	1.0
									1800 2000	1800 2000	1800 2000	1800 2000	1800.0 2000.0	1828.8 2032.0	1.2
	Permissible datum diameter variations relative to one another (mm)		0.3			0.4			0.6				—		

For further details see standard DIN 2211 Page 1 and DIN 2217 Page 1 or BS 3790. These V-grooved pulleys also accept Optibelt SUPER TX M=S V-belts and Super X-POWER wedge belts. **Figures in bold type** are the preferred datum diameters. ■ For classical V-belts only • For Optibelt Super X-POWER M=S wedge belts

Standard Range

optibelt V-Grooved Pulleys USA Standard RMA/MPTA for Wedge Belts

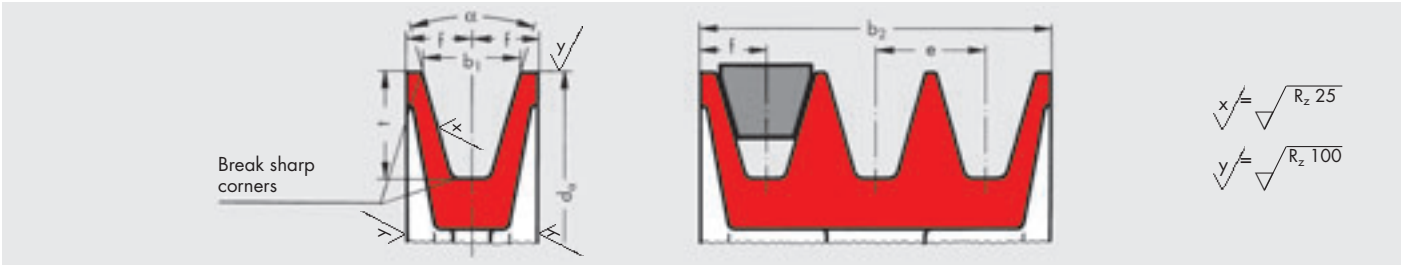


Table 11

Belt section USA Standard RMA/MPTA	3V/9N	5V/15N	8V/25N	
b ₁	8.89 ± 0.13	15.24 ± 0.13	25.4 ± 0.13	
e	10.30 ± 0.40	17.50 ± 0.40	28.6 ± 0.40	
f	9.00 + 2.00 – 1.00	13.00 + 3.00 – 1.00	19.0 + 6.00 – 2.00	
t _{min}	8.6	15.0	25.1	
d _{a min}	63	140	315	
α	36° ± 25' d _a 63 to 90	— —	— —	
	38° ± 25' d _a > 90 to 150	38° ± 25' d _a 140 to 255	38° ± 25' 315 to 405	
	40° ± 25' d _a > 150 to 305	40° ± 25' d _a > 255 to 405	40° ± 25' d _a >405 to 570	
	42° ± 25' d _a > 305	42° ± 25' d _a > 405	42° ± 25' d _a > 570	
Face width b ₂ for number of grooves z b ₂ = (z – 1) e + 2 f	1	18.0	26.0	38.0
	2	28.3	43.5	66.6
	3	38.6	61.0	95.2
	4	48.9	78.5	123.8
	5	59.2	96.0	152.4
	6	69.5	113.5	181.0
	7	79.8	131.0	209.6
	8	90.1	148.5	238.2
	9	100.4	166.0	266.8
	10	110.7	183.5	295.4
	11	121.0	201.0	324.0
	12	131.3	218.5	352.6
(Values in mm)				

(Values in mm)

For drives with several grooves the total of all deviations from the nominal value e for all groove distances of a pulley ± 0.8 mm must not be exceeded. For further details see USA Standard RMA/MPTA.

Note:
The permissible variations of the V-grooved pulley according to USA Standard RMA/MPTA deviate only slightly from the values contained in ISO 5290 "Grooved pulleys for joined narrow belts" (kraftbands). Therefore Optibelt KB Kraftbands can be used for V-grooved pulleys manufactured according to both standards. These V-grooved pulleys are also used for Optibelt Super X-POWER M=S wedge belts.

Standard Range

optibelt V-Pulleys for Kraftbands

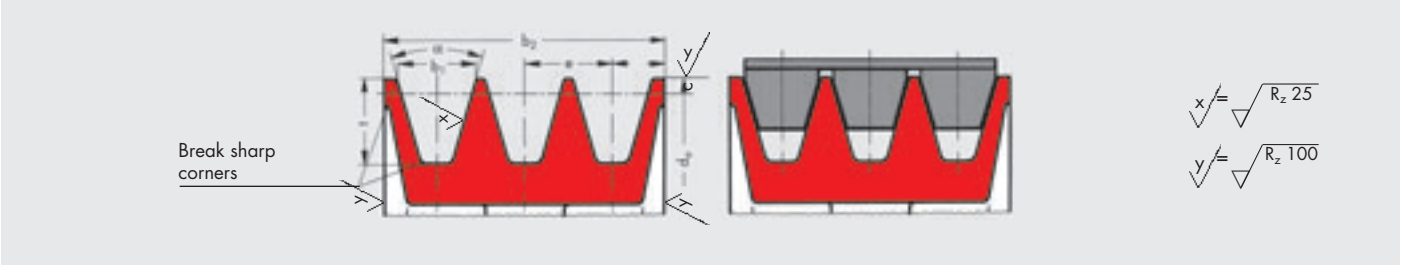



Table 12: V-pulleys for kraftbands with wedge belts according to ISO 5290

Section	d_a	α° $\pm 30'$	b_1 $\approx$	δh_{1max}	δh_{2max}	t_{min}	e	Tol e ¹⁾	Σ Tol e ²⁾	f_{min}	$d_{a min}$
3V/9J	67 to 90	36	8.9	0.20	0.30	8.9	10.3	± 0.25	± 0.5	9	67
	> 90 to 150	38									
	> 150 to 300	40									
	> 300	42									
5V/15J	180 to 250	38	15.2	0.25	0.40	15.2	17.5	± 0.25	± 0.5	13	180
	> 250 to 400	40									
	> 400	42									
8V/25J	315 to 400	38	25.4	0.30	0.50	25.4	28.6	± 0.40	± 0.8	19	315
	> 400 to 560	40									
	> 560	42									

For further details please see Standard ISO 5290.
1) Tolerance for the dimension "e" between two adjacent grooves.
2) The sum of all deviations from the nominal dimension "e" for all the groove spacings of a pulley must not exceed the tolerance shown.

The International Standard ISO 5290 specifies pulley groove dimensions for belt sections 3V/9J, 5V/15J, 8V/25J. The groove top width "b₁" is used as the basic reference dimension for standardisation of the grooves and the joined V-belts. The pulley groove and the joined V-belts are considered in the Standard ISO 5290 as a single unit.

- The values of δh_1 and δh_2 were chosen to ensure that
- the belt joining band does not come into contact with the outside diameter of the pulley in order to avoid the belts separating from the joining band,
 - the belts are still seated deep enough in the pulley grooves to ensure full transmission of power.

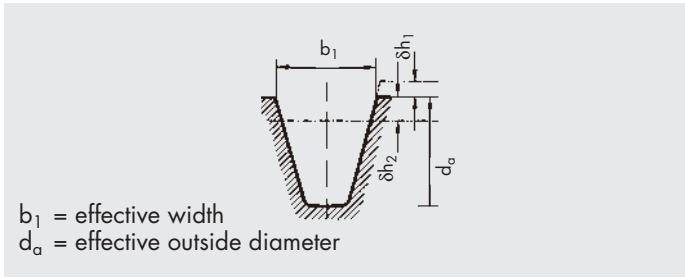

The groove faces must be straight at least to the level of $d_a - 2 \delta h_2$.

Table 13: V-pulleys for kraftbands with section SPZ, SPA, SPB and SPC according to BS 3790/DIN 2211/ISO 4183

Section	d_d	α° $\pm 30'$	b_1 $\approx$	c	t_{min}	e	Tol e ¹⁾	Σ Tol e ²⁾	f_{min}	$d_d min$
SPZ	71 to 80	34	9.7	2.0	11	12.0	± 0.3	± 0.6	8.0	71
	> 80	38								
SPA	100 to 118	34	12.7	2.8	14	15.0	± 0.3	± 0.6	10.0	100
	> 118	38								
SPB	160 to 190	34	16.3	3.5	18	19.0	± 0.4	± 0.8	12.5	160
	> 190	38								
SPC	250 to 315	34	22.0	4.8	24	25.5	± 0.40	± 0.8	17.0	250
	> 315	38								

Standard Range
optibelt V-Pulleys for Kraftbands



Table 14: V-pulleys for kraftbands with classical V-belts ISO 5291/ASAE S211.5

Section	d _a	α° ± 30'	b ₁ ≈	δ h _{1max}	δ h _{2max}	c	t _{min}	e	Tol e ¹⁾	Σ Tol e ²⁾	f _{min}	d _{a min}
AJ/HA	80 to 125 > 125	34 38	13.0	0.20	0.35	1.5	12.0	15.88	± 0.3	± 0.6	9.0	80
BJ/HB	130 to 195 > 195	34 38	16.5	0.25	0.40	2.0	14.0	19.05	± 0.4	± 0.8	11.5	130
CJ/HC	210 to 325 > 325	34 38	22.4	0.30	0.45	3.0	19.0	25.40	± 0.5	± 1.0	16.0	210
DJ/HD	370 to 490 > 490	36 38	32.8	0.30	0.55	4.5	26.0	36.53	± 0.6	± 1.2	23.0	370

1) Tolerance for the dimension “e” between two adjacent grooves.
2) The sum of all deviations from the nominal dimension “e” for all the groove spacings of a pulley must not exceed the tolerance shown.

Table 15: Pulley width for kraftbands

Section	3V/9J	5V/15J	8V/25J	SPZ	SPA	SPB	SPC	AJ/HA	BJ/HB	CJ/HC	DJ/HD
Number of grooves	Face width b ₂ for number of grooves z b ₂ = (z – 1) e + 2 f										
2	28.30	43.50	66.60	28.00	35.00	44.00	59.50	33.88	42.05	57.40	82.53
3	38.60	61.00	95.20	40.00	50.00	63.00	85.00	49.76	61.10	82.80	119.06
4	48.90	78.50	123.80	52.00	65.00	82.00	110.50	65.64	80.15	108.20	155.59
5	59.20	96.00	152.40	64.00	80.00	101.00	136.00	81.52	99.20	133.60	192.12
6	69.50	113.50	181.00	76.00	95.00	120.00	161.50	97.40	118.25	159.00	228.65
7	79.80	131.00	209.60	88.00	110.00	139.00	187.00	113.28	137.30	184.40	265.18
8	90.10	148.50	238.20	100.00	125.00	158.00	212.50	129.16	156.35	209.80	301.71
9	100.40	166.00	266.80	112.00	140.00	177.00	238.00	145.04	175.40	235.20	338.24
10	110.70	183.50	295.40	124.00	155.00	196.00	263.50	160.92	194.45	260.60	374.77
11	121.00	201.00	324.00	136.00	170.00	215.00	289.00	176.80	213.50	286.00	401.30
12	131.30	218.50	352.60	148.00	185.00	234.00	314.50	192.68	232.55	311.40	447.83
13	141.60	236.00	381.20	160.00	200.00	253.00	340.00	208.56	251.60	336.80	484.36
14	151.90	253.50	409.80	172.00	215.00	272.00	365.50	224.44	270.65	362.20	520.89
15	162.20	271.00	438.40	184.00	230.00	291.00	391.00	240.32	289.70	387.60	557.42
16	172.50	288.50	467.00	196.00	245.00	310.00	416.50	256.20	308.75	413.00	593.95
17	182.80	306.00	495.60	208.00	260.00	329.00	442.00	272.08	327.80	438.40	630.48
18	193.10	323.50	524.20	220.00	275.00	348.00	467.50	287.96	346.85	463.80	667.01
19	203.40	341.00	552.80	232.00	290.00	367.00	493.00	303.84	365.90	489.20	703.54
20	213.70	358.50	581.40	244.00	305.00	386.00	518.50	319.72	384.95	514.60	740.07
21	224.00	376.00	610.00	256.00	320.00	405.00	544.00	335.60	404.00	540.00	776.60
22	234.30	393.50	638.60	268.00	335.00	424.00	569.50	351.48	423.05	565.40	813.13
23	244.60	411.00	667.20	280.00	350.00	443.00	595.00	367.36	442.10	590.80	849.66
24	254.90	428.50	695.80	292.00	365.00	462.00	620.50	383.24	461.15	616.20	886.19
25	265.20	446.00	724.40	304.00	380.00	481.00	646.00	399.12	480.20	641.60	922.72
26	275.50	463.50	753.00	316.00	395.00	500.00	671.50	415.00	499.25	667.00	959.25
27	285.80	481.00	781.60	328.00	410.00	519.00	697.00	430.88	518.30	692.40	995.78
28	296.10	498.50	810.20	340.00	425.00	538.00	722.50	446.76	537.35	717.80	1032.31
29	306.40	516.00	838.80	352.00	440.00	557.00	748.00	462.64	556.40	743.20	1068.84
30	316.70	533.50	867.40	364.00	455.00	576.00	773.50	478.52	575.45	768.60	1105.37
31	327.00	551.00	896.00	376.00	470.00	595.00	799.00	494.40	594.50	794.00	1141.90
32	337.30	568.50	924.60	388.00	485.00	614.00	824.50	510.28	613.55	819.40	1178.43
33	347.60	586.00	953.20	400.00	500.00	633.00	850.00	526.16	632.60	844.80	1214.96
34	357.90	603.50	981.80	412.00	515.00	652.00	875.50	542.04	651.65	870.20	1251.49
35	368.20	621.00	1010.40	424.00	530.00	671.00	901.00	557.92	670.70	895.60	1288.02
36	378.50	638.50	1039.00	436.00	545.00	690.00	926.50	573.80	689.75	921.00	1324.55
37	388.80	656.00	1067.60	448.00	560.00	709.00	952.00	589.68	708.80	946.40	1361.08
38	399.10	673.50	1096.20	460.00	575.00	728.00	977.50	605.56	727.85	971.80	1397.61
39	409.40	691.00	1124.80	472.00	590.00	747.00	1003.00	621.44	746.90	997.20	1434.14
40	419.70	708.50	1153.40	484.00	605.00	766.00	1028.50	637.32	765.95	1022.60	1470.67

Standard Range
optibelt Deep Grooved Pulleys

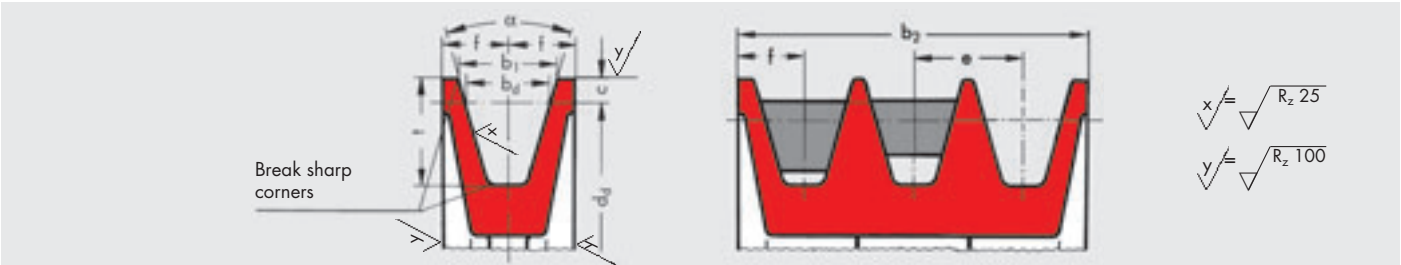


Table 16

Section		BS 3790/DIN 7753 Part1/ISO	SPZ	SPA	SPB	SPC	
For V-belts according to BS 3790/ DIN 2215 and 2216			Z/10	A/13	B/17	C/22	
b _d			8.5	11.0	14.0	19.0	
b ₁ ≈	α = 34°		11.0	15.0	18.9	26.3	
	α = 38°		11.3	15.4	19.5	27.3	
c			4.0	6.5	8.0	12.0	
e			14 ± 0.3	18 ± 0.3	23.0 ± 0.4	31 ± 0.5	
f			8 ± 0.6	10 ± 0.6	12.5 ± 0.8	17 ± 1.0	
t _{min}			13	18	22.5	31.5	
α	for datum diameter d _d for wedge belts BS 3790/DIN 7753 Part 1		34° ± 1° d _d 63 to 80	34° ± 1° d _d 90 to 118	34° ± 1° d _d 140 to 190	34° ± 30' d _d 224 to 315	
			38° ± 1° d _d > 80	38° ± 1° d _d > 118	38° ± 1° d _d > 190	38° ± 30' d _d > 315	
α	for datum diameter d _d for classical V-belts according to BS 3790/DIN 2215		34° ± 1° d _d 50 to 80	34° ± 1° d _d 71 to 118	34° ± 1° d _d 112 to 190	34° ± 30' d _d 180 to 315	
			38° ± 1° d _d > 80	38° ± 1° d _d > 118	38° ± 1° d _d > 190	38° ± 30' d _d > 315	
Face width b ₂ for number of grooves z b ₂ = (z – 1) e + 2 f			1	16	20	25	34
			2	29	37	47	64
			3	42	54	69	94
			4	55	71	91	124
			5	68	88	113	154
			6	81	105	135	184
			7	94	122	157	214
			8	107	139	179	244
			9	120	156	201	274
			10	133	173	223	304
			11	146	190	245	334
			12	159	207	267	364

Please note the minimum pulley diameters, pages 10 and 12.
Warning: Do not use kraftbands in deep grooved pulleys.

Standard Range

optibelt K5 V-Grooved Pulleys for Taper Bushes –

Grooves to BS 3790/DIN 221 1



Section SPZ/Z/10											
Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush	Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush
50▲◆	1	●	11	0.30	1008	106	1	●	8	0.90	1610
	2	●	11	0.40	1008		2	●	6	1.10	1610
56▲◆	1	●	11	0.40	1008		3	●	6	1.30	1610
	2	●	11	0.50	1108		4	●	6	1.30	1610
60▲◆■	1	●	8	0.20	1008		5	●	6	1.50	2012
	2	●	11	0.60	1108		6*	●	6	1.60	2012
63	1	●	8	0.20	1108	112	1	●	8	1.00	1610
	2	●	6	0.30	1108		2	●	6	1.30	1610
	3	●	6	0.40	1108		3	●	6	1.30	2012
	3	●	6	0.40	1108		4	●	6	1.50	2012
67	1	●	8	0.30	1108	6*	5	●	6	1.80	2012
	2	●	6	0.40	1108		6	●	6	1.90	2012
	3	●	6	0.50	1108		118	1	●	8	0.90
71	1	●	8	0.30	1108	2		●	6	1.30	1610
	2	●	6	0.40	1108	3		●	6	1.60	2012
	3	●	6	0.60	1108	4		●	6	1.80	2012
75	1	●	8	0.40	1108	5		●	6	1.80	2012
	2	●	6	0.40	1210	6*		●	6	2.00	2517
	3	●	6	0.50	1210	125	1	●	8	1.00	1610
80	1	●	8	0.50	1210		2	●	6	1.40	1610
	2	●	6	0.60	1210		3	●	2	1.80	2012
	3	●	6	0.70	1210		4	●	2	2.20	2012
	4	●	6	0.80	1210		5	●	6	2.30	2012
85	1	●	8	0.60	1210		6*	●	6	2.50	2517
	2	●	6	0.50	1610	132	1	●	8	1.10	1610
	3	●	6	0.60	1610		2	●	6	1.50	1610
	4	●	6	0.90	1610		3	●	2	2.30	2012
	5	●	6	1.00	1610		4	●	2	2.50	2012
90	1	●	8	0.70	1210		5	●	6	2.70	2517
	2	●	6	0.70	1610		6*	●	6	2.90	2517
	3	●	6	0.80	1610	140	1	●	8	1.20	1610
	4	●	6	1.00	1610		2	●	2	1.70	1610
	5	●	6	1.20	1610		3	●	2	2.60	2012
95	1	●	8	0.70	1210		4	●	2	2.90	2012
	2	●	6	0.80	1610		5	●	2	3.20	2517
	3	●	6	0.90	1610		6*	●	2	3.50	2517
	4	●	6	1.10	1610	8*	●	4	4.00	2517	
	5	●	6	1.30	1610	150	1	●	8	1.20	1610
100	1	●	8	0.80	1210		2	●	8	2.00	2012
	2	●	6	0.90	1610		3	●	2	3.10	2012
	3	●	6	1.10	1610		4	●	2	3.70	2517
	4	●	6	1.10	1610		5	●	2	4.00	2517
	5	●	6	1.30	2012		6*	●	2	4.40	2517
	6*	●	6	1.40	2012		8*	●	4	5.10	2517
▲ for Section 10 ◆ for Section ZX/X10 ■ for Section XPZ											

No. of grooves z	1	2	3	4	5	6	8
Face width b ₂ (mm)	16	28	40	52	64	76	100
Taper bush	1008	1108	1210	1610	2012	2517	3020
Bore d ₂ (mm) from ... to ...	10-25	10-28	11-32	14-42	14-50	16-60	25-75

● Solid pulley
○ Plate pulley (with or without lightening holes)
× Spoked pulley
Material: EN-GJL 200 (GG 20)
DIN 1691
* Non stock item
Bore diameter d₂ see page 66

Standard Range

optibelt K5 V-Grooved Pulleys for Taper Bushes –

Grooves to BS 3790/DIN 221 1



Section SPZ/Z/10											
Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush	Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush
160	1	●	8	1.30	1610	280	1	x	7	2.90	2012
	2	●	8	2.50	2012		2	x	7	4.00	2012
	3	●	2	3.60	2012		3	x	7	5.30	2517
	4	●	2	4.40	2517		4	x	10	6.40	2517
	5	●	2	4.80	2517		5	x	10	7.10	2517
	6*	●	2	5.20	2517		6*	x	10	7.80	2517
	8*	●	4	5.60	2517		8*	x	10	10.80	3020
170	1	●	8	1.50	1610	315	1	x	7	3.10	2012
	2	●	8	2.50	2012		2	x	7	4.20	2012
	3	○	9	4.20	2012		3	x	7	6.10	2517
	4	●	2	5.30	2517		4	x	10	7.60	2517
	5	●	2	5.90	2517		5	x	10	8.60	2517
	6*	●	2	6.50	2517		6*	x	10	9.30	2517
180	1	●	8	1.60	1610	355	1	x	7	3.50	2012
	2	●	8	2.50	2012		2	x	7	5.10	2012
	3	○	9	4.80	2012		3	x	7	7.30	2517
	4	○	9	6.10	2517		4	x	10	8.90	2517
	5	○	9	6.30	2517		5	x	10	10.00	2517
	6*	○	9	6.80	2517		6*	x	10	10.70	2517
	8*	●	4	7.10	3020		8*	x	10	16.00	3030
190	1	●	8	1.80	1610	400	1	x	7	6.00	2012
	2	●	8	2.60	2012		2	x	7	6.30	2517
	3	○	9	4.90	2012		3	x	7	8.00	2517
	4	○	9	5.30	2517		4	x	10	10.10	2517
	5	○	9	6.30	2517		5	x	10	11.70	3020
	6*	○	9	6.90	2517		6*	x	10	14.50	3020
200	1	●	8	2.30	2012	450	8*	x	10	18.20	3030
	2	●	8	2.80	2012		1	x	7	6.10	2517
	3	○	9	3.50	2012		2	x	7	8.20	2517
	4	○	9	4.70	2517		3	x	7	9.80	2517
	5	○	9	5.50	2517		4	x	10	11.80	3020
	6*	○	9	6.10	2517		5	x	10	13.90	3020
	8*	●	4	9.30	3020		6*	x	10	16.90	3030
224	1	○	5	2.50	2012	500	8*	x	10	24.00	3535
	2	○	5	3.20	2012		2	x	7	9.10	2517
	3	○	9	3.90	2012		3	x	7	11.40	2517
	4	○	9	5.20	2517		4	x	10	14.30	3020
	5	○	9	6.00	2517		5	x	10	17.60	3020
	6*	○	9	6.60	2517		6*	x	10	19.90	3020
	8*	●	4	11.80	3020	630	3	x	7	15.90	2517
250	1	x	7	2.80	2012		4	x	10	20.00	3020
	2	x	7	3.50	2012		5	x	10	22.70	3020
	3	x	10	4.30	2012		6*	x	7	33.60	3535
	4	x	10	5.70	2517						
	5	x	10	7.00	2517						
	6	x	10	7.00	2517						
	8*	x	10	10.50	3020						

No. of grooves z	1	2	3	4	5	6	8
Face width b ₂ (mm)	16	28	40	52	64	76	100
Taper bush	1610	2012	2517	3020	3030	3535	
Bore d ₂ (mm) from ... to ...	14-42	14-50	16-60	25-75	35-75	35-90	

● Solid pulley
○ Plate pulley (with or without lightening holes)
× Spoked pulley
Material: EN-GJL 200 (GG 20)
DIN 1691
* Non stock item
Bore diameter d₂ see page 66

Standard Range

optibelt K5 V-Grooved Pulleys for Taper Bushes –

Grooves to BS 3790/DIN 2211



Section SPA/A/13																
Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush	Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush					
63♦	1	●	11	0,60	1108	118	1	●	8	1,20	1610					
	2	●	11	0,80	1108		2	●	6	1,40	1610					
67♦	1	●	8	0,30	1108		3	●	2	1,80	2012					
	2	●	6	0,50	1108		4	●	2	2,00	2012					
							5	●	2	2,40	2012					
71▲♦■	1	●	8	0,30	1108	125	1	●	8	1,40	1610					
	2	●	6	0,50	1108		2	●	2	1,70	1610					
	3	●	6	0,70	1108		3	●	2	2,00	2012					
							4	●	2	2,50	2012					
75▲♦■	1	●	8	0,40	1108		5	●	2	2,70	2012					
	2	●	6	0,60	1108	132	1	●	8	1,60	1610					
	3	●	6	0,80	1108		2	●	2	1,80	2012					
							3	●	2	2,30	2012					
80▲♦■	1	●	8	0,50	1210			4	●	2	2,60	2517				
	2	●	6	0,60	1210		5	●	2	2,90	2517					
	3	●	6	0,90	1210	140	1	●	8	1,80	1610					
85▲♦■	1	●	8	0,60	1210			2	●	2	2,00	2012				
	2	●	6	0,70	1210			3	●	2	2,80	2517				
	3	●	6	1,00	1210			4	●	2	3,10	2517				
90	1	●	8	0,70	1210		5	●	2	3,40	2517					
	2	●	6	0,70	1610	150	1	●	8	1,40	1610					
	3	●	6	1,00	1610			2	●	2	2,40	2012				
	4	●	6	1,20	1615			3	●	2	3,50	2517				
95	1	●	8	0,80	1210			4	●	2	3,80	2517				
	2	●	6	0,90	1610		5	●	2	4,20	2517					
	3	●	6	1,10	1610	160	1	○	5	1,90	1610					
	4	●	6	1,40	1615			2	●	2	2,90	2012				
100	1	●	8	0,80	1610			3	●	2	3,90	2517				
	2	●	6	0,90	1610			4	●	2	4,40	2517				
	3	●	2	1,20	1610			5	●	2	5,10	2517				
	4	●	2	1,70	1610	170	1	○	5	2,00	1610					
	5	●	6	1,90	1610			2	●	2	3,10	2012				
106	1	●	8	0,90	1610			3	●	2	4,60	2517				
	2	●	6	1,10	1610			4	●	2	5,50	2517				
	3	●	2	1,40	1610			5	●	2	5,90	3020				
	4	●	6	2,00	2012	180	1	○	5	2,10	1610					
	5	●	6	2,00	2012			2	○	9	3,40	2012				
112	1	●	8	1,00	1610			3	●	2	5,10	2517				
	2	●	6	1,20	1610			4	●	2	5,90	2517				
	3	●	6	1,30	2012			5	●	2	6,20	3020				
	4	●	6	1,90	2012	190	1	○	5	2,30	1610					
	5	●	6	2,10	2012			2	○	9	3,80	2012				
								3	●	2	5,40	2517				
								4	●	2	6,80	2517				
								5	●	2	7,40	3020				
						▲ for Section 13 ♦ for Section AX/X13 ■ for Section XPA										

No. of grooves z	1	2	3	4	5		
Face width b ₂ (mm)	20	35	50	65	80		
Taper bush	1108	1210	1610	1615	2012	2517	3020
Bore d ₂ (mm) from ... to ...	10-28	11-32	14-42	14-42	14-50	16-60	25-75

● Solid pulley
○ Plate pulley (with or without lightening holes)
× Spoked pulley
Material: EN-GJL 200 (GG 20)
DIN 1691
* Non stock item
Bore diameter d₂ see page 66

Standard Range

optibelt K5 V-Grooved Pulleys for Taper Bushes –

Grooves to BS 3790/DIN 221 1



Section SPA/A/13											
Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush	Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush
200	1	○	5	2.60	2012	450	1	x	7	7.00	2012
	2	○	5	4.10	2517		2	x	7	10.30	2517
	3	○	9	4.90	2517		3	x	7	14.10	3020
	4	●	2	7.40	3020		4	x	10	15.50	3020
	5	●	4	8.40	3020		5	x	7	24.30	3535
212	1	○	5	2.70	2012	500	1	x	7	8.00	2517
	2	○	5	4.30	2517		2	x	7	11.60	2517
	3	○	9	5.20	2517		3	x	7	16.00	3020
	4	●	2	7.30	3020		4	x	10	18.20	3020
	5	●	2	8.20	3020		5	x	7	27.30	3535
224	1	x	7	2.70	2012	560	1	x	7	11.60	2517
	2	○	5	4.40	2517		2	x	7	15.50	3020
	3	○	9	5.50	2517		3	x	7	17.80	3020
	4	●	2	7.40	3020		4	x	7	26.70	3535
	5	●	2	8.30	3020		5	x	7	30.40	3535
236	1	x	7	2.80	2012	630	1	x	7	10.10	2517
	2	○	5	4.60	2517		2	x	7	16.00	3020
	3	○	9	5.70	2517		3	x	7	22.00	3020
	4	●	2	7.80	3020		4	x	7	30.80	3535
	5	●	2	8.70	3020		5	x	7	33.70	3535
250	1	x	7	2.90	2012						
	2	x	7	4.80	2517						
	3	○	9	5.90	2517						
	4	○	9	8.00	3020						
	5	○	9	9.00	3020						
280	1	x	7	3.30	2012						
	2	x	7	5.40	2517						
	3	○	9	6.70	2517						
	4	○	9	8.80	3020						
	5	○	5	15.50	3535						
315	1	x	7	3.60	2012						
	2	x	7	6.00	2517						
	3	○	5	8.30	3020						
	4	○	9	9.70	3020						
	5	○	5	17.00	3535						
355	1	x	7	4.20	2012						
	2	x	7	6.70	2517						
	3	x	7	9.20	3020						
	4	x	10	11.00	3020						
	5	x	7	18.60	3535						
400	1	x	7	4.90	2012						
	2	x	7	8.10	2517						
	3	x	7	11.00	3020						
	4	x	10	12.80	3020						
	5	x	7	21.00	3535						

No. of grooves z	1	2	3	4	5
Face width b ₂ (mm)	20	35	50	65	80
Taper bush	2012	2517	3020	3535	
Bore d ₂ (mm) from ... to ...	14-50	16-60	25-75	35-90	

● Solid pulley
○ Plate pulley (with or without lightening holes)
× Spoked pulley
Material: EN-GJL 200 (GG 20)
DIN 1691
* Non stock item
Bore diameter d₂ see page 66

Standard Range

optibelt K5 V-Grooved Pulleys for Taper Bushes –

Grooves to BS 3790/DIN 2211



Section SPB/B/17																	
Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush	Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush						
100♦	1	●	1	0.90	1610	180	1	●	1	4.10	1610						
	2	●	6	1.20	1610		2	●	8	4.50	2517						
	3	●	6	1.70	1610		3	●	2	5.50	2517						
112▲◆■	1	●	1	1.10	1610	180	4	●	4	6.90	2517						
	2	●	6	1.50	1610		5	●	4	7.10	3020						
	3	●	6	2.00	1610		6	●	4	7.70	3020						
8												●	4	9.50	3020		
118▲◆■	1	●	1	1.30	1610	190	1	●	8	4.60	2012						
	2	●	6	1.70	1610		2	●	8	5.00	2517						
	3	●	6	2.30	1610		3	●	2	6.30	2517						
125▲◆■	1	●	1	1.50	1610		190	4	●	4	7.60	2517					
	2	●	2	1.90	2012	5		●	4	8.10	3020						
	3	●	2	2.40	2012	6		●	4	9.20	3020						
	4	●	4	3.00	2012	8		●	4	11.20	3030						
	5	●	6	3.50	2012												
132▲	1	●	1	1.80	1610	200	1	●	8	5.00	2012						
	2	●	2	2.20	2012		2	●	8	5.40	2517						
	3	●	2	2.80	2012		3	●	2	6.50	2517						
	4	●	4	3.40	2012		4	●	2	8.80	3020						
	5	●	4	3.70	2012		5	●	2	9.10	3020						
6												●	4	10.30	3020		
140	1	●	1	2.30	1610	200	8	●	4	13.50	3535						
	2	●	2	2.70	2012		212	1	●	8	4.20	2012					
	3	●	2	3.30	2012			2	●	8	4.90	2517					
	4	●	2	3.70	2517			3	●	2	6.00	2517					
	5	●	2	4.50	2517			4	●	2	9.80	3020					
	6	●	4	4.60	2517			5	●	2	11.00	3020					
150	1	●	1	2.70	1610	212		6	●	4	14.30	3535					
	2	●	2	3.10	2012		8	●	4	16.60	3535						
	3	●	2	3.90	2517		224	1	●	8	4.70	2012					
	4	●	2	4.40	2517			2	●	8	5.30	2517					
	5	●	4	5.20	2517			3	●	2	6.30	2517					
	6	●	4	5.60	2517			4	●	2	11.30	3020					
160	1	●	1	2.50	1610	224		5	●	2	12.70	3020					
	2	●	2	2.90	2012			6	●	4	17.00	3535					
	3	●	2	4.20	2517		8	●	4	19.30	3535						
	4	●	4	4.90	2517												
	5	●	4	6.00	2517							236	1	●	8	5.00	2012
	6	●	4	5.40	3020												
170	1	●	1	2.90	1610	236	3	x	10	7.00	2517						
	2	●	2	3.30	2012		4	x	10	14.50	3020						
	3	●	2	4.90	2517		5	●	6	16.90	3535						
	4	●	4	5.70	2517		6	●	4	20.00	3535						
	5	●	4	6.10	3020		8	●	4	22.30	3535						
	6	●	4	6.50	3020		10	●	4	25.30	3535						
	8	●	4	8.00	3020												
	▲ for Section 17 ♦ for Section BX/X17 ■ for Section XPB																

No. of grooves z	1	2	3	4	5	6	8	10
Face width b ₂ (mm)	25	44	63	82	101	120	158	196
Taper bush	1610	2012	2517	3020	3030	3535		
Bore d ₂ (mm) from ... to ...	14-42	14-50	16-60	25-75	35-75	35-90		

● Solid pulley
○ Plate pulley (with or without lightening holes)
× Spoked pulley
Material: EN-GJL 200 (GG 20)
DIN 1691
* Non stock item
Bore diameter d₂ see page 66

Standard Range

optibelt K5 V-Grooved Pulleys for Taper Bushes –

Grooves to BS 3790/DIN 2211



Section SPB/B/17													
Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush	Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush		
250	1	●	8	5.40	2012	355	2	x	7	8.70	3020		
	2	x	7	5.50	2517		3	x	10	10.80	3020		
	3	●	2	7.70	3020		4	x	7	18.60	3535		
	4	●	2	19.60	3020		5	x	10	20.80	3535		
	5	●	2	21.70	3535		6	○	9	22.80	3535		
	6	●	4	23.30	3535		8	x	10	27.00	3535		
	8	●	4	27.50	3535		10*	x	10	38.00	4040		
	10	●	4	29.30	3535		375	2	x	7	9.50	3020	
	265	2	●	7	6.20			2517	3	x	10	11.50	3020
		3	○	9	8.00			3020	4	x	10	16.50	3525
4		○	9	9.50	3020	6		x	10	25.00	3535		
6		○	9	16.70	3525	8		x	10	28.00	4040		
8		○	9	24.00	3525	400		2	x	7	10.00	3020	
280	1	x	7	6.10	2012			3	x	7	18.30	3535	
	2	x	7	6.80	2517			4	x	7	20.50	3535	
	3	x	10	8.60	3020			5	x	10	23.40	3535	
	4	○	9	10.10	3020			6	x	10	25.10	3535	
	5	○	9	17.80	3535		8	x	10	36.50	4040		
	6	○	9	19.60	3535		10*	x	10	41.00	4040		
	8	○	9	26.70	3535		425	2	x	7	11.50	3020	
	10	○	9	30.50	3535			3	x	7	18.00	3535	
	300	2	x	7	7.30			2517	4	x	10	19.50	3535
		3	x	10	9.20	3020		6	x	10	25.10	4040	
4		○	9	14.30	3020	8		x	10	52.50	4545		
5		○	9	18.20	3535	450		2	x	7	12.10	3020	
6		○	9	21.90	3535			3	x	7	21.90	3535	
8		○	9	26.20	3535			4	x	7	24.50	3535	
315	1	x	7	7.20	2012			5	x	10	27.30	3535	
	2	x	7	7.80	2517			6	x	10	35.50	4040	
	3	x	10	9.60	3020		8	x	10	40.90	4040		
	4	○	5	17.10	3535	10*	x	10	53.50	4545			
	5	○	9	18.80	3535	500	2	x	7	13.20	3020		
	6	○	9	23.00	3535		3	x	7	23.10	3535		
8	○	9	26.00	3535	4		x	7	26.60	3535			
10	○	9	31.50	3535	5		x	10	29.90	3535			
335	2	x	7	7.80	2517		6	x	10	38.90	4040		
	3	x	10	10.50	3020		8	x	10	45.50	4040		
	4	x	7	18.30	3535	10*	x	10	61.00	4545			
	5	x	10	19.50	3535	560	2	x	7	16.50	3030		
	6	x	10	22.00	3535		3	x	7	25.90	3535		
	8	x	10	28.20	3535		4	x	7	29.00	3535		
10*	x	10	36.00	4040	5		x	7	35.30	4040			
					6		x	10	43.10	4040			
					8		x	10	49.00	4545			
					10*	x	10	55.70	4545				

No. of grooves z	1	2	3	4	5	6	8	10
Face width b ₂ (mm)	25	44	63	82	101	120	158	196
Taper bush	2012	2517	3020	3030	3535	4040	4545	
Bore d ₂ (mm) from ... to ...	14-50	16-60	25-75	35-75	35-90	40-100	55-110	

● Solid pulley
○ Plate pulley (with or without lightening holes)
× Spoked pulley

Material: EN-GJL 200 (GG 20)
DIN 1691

* Non stock item

Bore diameter d₂ see page 66

Standard Range

optibelt K5 V-Grooved Pulleys for Taper Bushes – Grooves to BS 3790/DIN 2211



Section SPB/B/17

[illegible]

No. of grooves z	2	3	4	5	6	8	10
Face width b_2 (mm)	44	63	82	101	120	158	196
Taper bush	3030	3535	4040	4545	5050		
Bore d_2 (mm) from ... to ...	35-75	35-90	40-100	55-110	70-125		

- Solid pulley
- Plate pulley (with or without lightening holes)
- × Spoked pulley

Material: EN-GJL 200 (GG 20)
DIN 1691

* Non stock item

Bore diameter d_2 see page 66

Standard Range

optibelt K5 V-Grooved Pulleys for Taper Bushes –

Grooves to BS 3790/DIN 2211



Section SPC/C/22											
Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush	Datum diameter d _d (mm)	No. of grooves	Type		Weight without bush (≈ kg)	Taper bush
200▲◆■	3	●	4	9.00	2517	315	3	○	5	21.60	3535
	4	●	4	10.50	3020		4	○	9	24.60	3535
	5	●	4	14.00	3535		5	○	9	29.00	3535
	6	●	4	17.00	3535		6	○	9	31.40	3535
212▲◆■	3	●	4	10.00	3020	335	8	●	4	50.00	4040
	4	●	4	12.50	3020		10*	○	9	58.00	4545
	5	●	4	15.00	3535		3	○	5	22.50	3535
	6	●	4	18.00	3535		4	○	9	26.50	3535
224	2	●	4	8.10	3020	355	5	○	9	30.00	3535
	3	●	4	11.00	3020		6	○	9	35.00	3535
	4	●	4	14.00	3535		8	○	9	58.00	4040
	5	●	4	16.20	3535		3	○	5	22.90	3535
	6	●	4	19.00	3535	375	4	○	9	28.30	3535
	8	●	4	24.90	3535		5	○	9	32.50	3535
236	3	●	4	12.00	3020		6	○	9	36.00	3535
	4	●	4	17.20	3535		8	○	9	67.50	4040
	5	●	4	19.10	3535		10*	○	9	121.00	4545
	6	●	4	20.80	3535	400	3	○	5	23.80	3535
	8	●	4	25.50	3535		4	○	9	30.00	3535
250	2	●	4	9.80	3020		5	○	9	33.00	3535
	3	●	4	14.50	3020		6	○	9	45.50	4040
	4	●	4	20.70	3535		8	○	9	68.00	4545
	5	●	4	22.80	3535	425	3	x	7	24.10	3535
	6	●	4	26.00	3535		4	x	10	28.00	3535
	8	●	4	29.70	3535		5	x	10	34.00	3535
265	10*	●	4	34.00	4040		6	○	9	48.00	4040
	3	●	8	21.20	3535		8	○	9	65.00	4545
	4	○	9	24.00	3535		10*	○	9	88.00	5050
	5	○	9	26.20	3535	450	3	x	7	26.00	3535
	6	○	9	29.00	3535		4	x	10	31.00	3535
280	8	○	9	33.30	3535		5	○	9	45.00	4040
	3	●	8	24.00	3535		6	○	9	58.00	4545
	4	○	9	29.00	3535		8	○	9	74.00	4545
	5	○	9	31.00	3535	475	3	x	7	28.60	3535
	6	○	9	33.80	3535		4	x	10	33.50	3535
	8	○	9	37.50	3535		5	x	10	45.00	4040
300	10*	○	9	45.00	4040		6	○	9	61.10	4545
	3	○	5	21.00	3535		8	○	9	78.70	5050
	4	○	9	25.00	3535		10*	○	9	101.00	5050
	5	○	9	28.50	3535		3	x	7	40.00	3535
	6	○	9	29.00	3535		4	x	10	47.00	3535
	8	●	4	46.50	4040		5	x	10	47.20	4040
	10*	○	9	53.50	4545		6	○	9	62.80	4545
							8	○	9	81.50	5050
▲ for Section 22 ◆ for Section CX/X22 ■ for Section XPC											

No. of grooves z	3	4	5	6	8	10
Face width b ₂ (mm)	85	110,5	136	161,5	212,5	263,5
Taper bush	2517	3020	3535	4040	4545	5050
Bore d ₂ (mm) from ... to ...	16-60	25-75	35-90	40-100	55-110	70-125

● Solid pulley
○ Plate pulley (with or without lightening holes)
× Spoked pulley

Material: EN-GJL 200 (GG 20)
DIN 1691

* Non stock item

Bore diameter d₂ see page 66

Standard Range

optibelt K5 V-Grooved Pulleys for Taper Bushes – Grooves to BS 3790/DIN 2211



Section SPC/C/22

[illegible]

No. of grooves z	3	4	5	6	8	10
Face width b_2 (mm)	85	110,5	136	161,5	212,5	263,5
Taper bush	3535	4040	4545	5050		
Bore d_2 (mm) from ... to ...	35-90	40-100	55-110	70-125		

- Solid pulley
- Plate pulley (with or without lightening holes)
- × Spoked pulley

Material: EN-GJL 200 (GG 20)
DIN 1691

* Non stock item

Bore diameter d_2 see page 66

Standard Range

optibelt K5 V-Grooved Pulleys for Plain Boring –

Grooves According to BS 3790/DIN 2211



Section SPZ/Z/10											
Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub l (mm)	Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub l (mm)
45▲◆	1	○	0.23	16	24	132	1	○	0.81	30	24
	2	○	0.30	16	35		2	○	1.30	38	35
	3	○	0.40	16	35		3	○	1.62	40	40
50▲◆	1	○	0.30	20	24	140	1	○	0.92	28	24
	2	○	0.40	20	35		2	○	1.40	38	38
	3	○	0.50	20	40		3	○	1.69	38	40
56▲◆■	1	○	0.32	20	24	150	1	x	1.05	28	24
	2	○	0.45	25	35		2	○	1.50	38	38
	3	○	0.65	25	40		3	○	1.85	38	40
63	1	○	0.34	25	24	160	1	x	1.22	32	30
	2	○	0.60	25	35		2	x	1.60	38	38
	3	○	0.85	25	40		3	x	2.40	42	40
71	1	○	0.34	25	24	170	1	x	1.66	40	30
	2	○	0.62	25	35		2	x	1.85	40	38
	3	○	1.00	30	40		3	x	3.00	42	40
75	1	○	0.35	24	24	180	1	x	2.10	32	30
	2	○	0.64	24	35		2	x	3.05	38	38
	3	○	1.05	28	40		3	x	3.50	42	40
80	1	○	0.35	25	24	190	1	x	2.25	35	30
	2	○	0.65	30	35		2	x	2.35	35	38
	3	○	1.10	38	35		3	x	4.00	35	40
85	1	○	0.30	25	24	200	1	x	2.40	32	38
	2	○	0.70	30	35		2	x	2.85	38	38
	3	○	1.10	38	35		3	x	4.45	42	40
90	1	○	0.38	25	24	212	1	x	2.60	35	30
	2	○	0.75	30	35		2	x	3.40	35	38
	3	○	1.15	38	38		3	x	5.00	38	40
95	1	○	0.40	28	24	225	1	x	2.80	32	38
	2	○	0.83	28	35		2	x	4.00	38	38
	3	○	1.20	38	38		3	x	5.30	42	40
100	1	○	0.48	28	24	250	1	x	3.30	32	38
	2	○	0.90	30	35		2	x	4.80	38	38
	3	○	1.25	38	38		3	x	6.00	42	40
106	1	○	0.50	30	24	280	1	x	3.85	35	34
	2	○	0.96	28	35		2	x	5.20	42	38
	3	○	1.32	38	38		3	x	7.00	48	40
112	1	○	0.54	28	24	315	1	x	4.35	35	34
	2	○	1.00	30	35		2	x	6.80	42	38
	3	○	1.40	38	38		3	x	8.25	48	40
118	1	○	0.60	28	24	355	1	x	4.60	35	34
	2	○	1.10	38	35		2	x	8.00	42	40
	3	○	1.47	38	38		3	x	10.00	48	45
125	1	○	0.70	28	24						
	2	○	1.20	30	35						
	3	○	1.55	38	40						
▲ for Section Z/10 ◆ for Section ZX/X10 ■ for Section XPZ											

No. of grooves z	1	2	3
Face width b ₂ (mm)	16	28	40

● Solid pulley
○ Plate pulley (with or without lightening holes)
× Spoked pulley
Hub position: flush one side
Material: EN-GJL 200 (GG 20) – DIN 1691

Standard Range

optibelt K5 V-Grooved Pulleys for Plain Boring –

Grooves According to BS 3790/DIN 2211



Section SPA/A/13											
Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub (mm)	Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub (mm)
50◆	1	○	0.34	18	34	106	1	○	0.88	28	34
	2	○	0.48	18	49		2	○	1.65	28	49
	3	○	0.55	18	47		3	○	2.20	32	42
56◆	1	○	0.42	20	34		4▽	○	3.24	32	53
	2	○	0.62	20	49		5▽	○	3.85	35	60
	3	○	0.74	20	47	112	1	○	1.09	28	34
63◆	1	○	0.52	25	34		2	○	1.75	38	49
	2	○	0.77	25	49		3	○	2.38	38	42
	3	○	0.85	25	47		4▽	○	3.37	42	53
	4▽	○	1.23	25	60		5▽	○	3.95	42	60
	5▽	○	1.48	25	70	118	1	○	1.10	32	34
71▲◆■	1	○	0.50	25	34		2	○	1.80	38	49
	2	○	0.89	28	49		3	○	2.42	42	42
	3	○	0.96	32	42		4▽	○	3.42	42	53
	4▽	○	1.47	32	60		5▽	○	4.10	48	65
	5▽	○	1.83	32	70	125	1	○	1.38	32	34
75▲◆■	1	○	0.53	24	34		2	○	1.90	38	49
	2	○	1.02	24	49		3	○	2.55	42	42
	3	○	1.08	24	42		4▽	○	3.49	42	53
	4▽	○	1.76	24	60		5▽	○	4.40	48	65
	5▽	○	1.92	28	82	132	1	○	1.45	32	34
80▲◆■	1	○	0.56	28	34		2	○	2.20	38	49
	2	○	1.04	32	49		3	○	2.58	42	42
	3	○	1.19	38	42		4▽	○	3.58	42	53
	4▽	○	1.89	38	60		5▽	○	4.75	48	65
	5▽	○	2.00	38	55	140	1	○	1.52	32	34
85▲◆■	1	○	0.64	24	34		2	○	2.33	38	49
	2	○	1.20	28	49		3	○	2.63	42	42
	3	○	1.40	28	42		4▽	○	3.65	42	53
	4▽	○	1.98	28	53		5▽	○	4.95	48	65
	5▽	○	2.20	32	55	150	1	x	1.60	38	36
90	1	○	0.88	28	34		2	x	2.59	38	49
	2	○	1.47	32	49		3	○	2.95	42	42
	3	○	1.62	38	42		4▽	○	4.04	42	53
	4▽	○	2.22	42	53		5▽	○	5.15	48	65
	5▽	○	2.51	42	67	160	1	x	1.75	38	36
95	1	○	0.76	28	34		2	x	2.40	38	49
	2	○	1.57	28	49		3	x	2.80	42	42
	3	○	1.89	28	42		4▽	○	3.62	48	60
	4▽	○	2.47	32	53		5▽	○	5.45	48	70
	5▽	○	2.75	35	67	170	1	x	2.00	35	36
100	1	○	0.84	28	34		2	x	2.90	35	49
	2	○	1.36	32	49		3	x	3.20	35	42
	3	○	1.98	38	52		4▽	x	4.20	35	60
	4▽	○	2.72	42	53		5▽	x	5.80	38	70
	5▽	○	3.10	42	60						
▲ for section A/13 ◆ for section AX/X13 ■ for section XPA						▽ d _d + 4 mm					

No. of grooves z	1	2	3	4	5
Face width b ₂ (mm)	20	35	50	65	80

● Solid pulley
○ Plate pulley (with or without lightening holes)
x Spoked pulley
Hub position: flush one side
Material: GG 20 – DIN 1691

Standard Range

optibelt K5 V-Grooved Pulleys for Plain Boring –

Grooves According to BS 3790/DIN 2211



Section SPA/A/13											
Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub (mm)	Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub (mm)
180	1	x	2.02	38	36	315	1	x	4.78	48	44
	2	x	3.15	42	49		2	x	6.60	48	53
	3	x	3.60	42	42		3	x	8.75	55	47
	4▽	x	4.65	48	60		4▽	x	11.80	55	60
	5▽	x	6.13	48	70		5▽	x	12.50	60	70
190	1	x	2.02	38	36	355	1	x	5.50	48	44
	2	x	3.20	42	49		2	x	7.70	55	53
	3	x	4.00	42	42		3	x	9.55	55	47
	4▽	x	5.24	48	60		4▽	x	11.80	55	60
	5▽	x	6.31	48	70		5▽	x	12.85	60	70
200	1	x	2.40	38	36	400	1▽	x	6.85	50	50
	2	x	2.85	42	49		2▽	x	8.80	55	53
	3	x	4.21	48	42		3▽	x	10.95	60	47
	4▽	x	4.95	55	60		4▽	x	12.40	60	67
	5▽	x	6.45	60	70		5▽	x	15.90	60	82
212	1	x	2.70	40	36	450	1▽	x	7.50	55	50
	2	x	3.40	42	49		2▽	x	9.40	55	53
	3	x	4.40	42	42		3▽	x	12.15	60	47
	4▽	x	5.68	42	60		4▽	x	14.20	65	67
	5▽	x	6.85	42	70		5▽	x	18.30	65	82
225	1	x	2.75	40	36	500	1▽	x	10.50	55	50
	2	x	3.87	42	49		2▽	x	10.70	55	55
	3	x	4.60	42	42		3▽	x	13.45	60	60
	4▽	x	6.50	42	60		4▽	x	16.25	65	67
	5▽	x	7.25	42	70		5▽	x	22.80	65	82
236	1	x	3.30	38	36	560	1▽	x	14.00	55	60
	2	x	4.10	42	49		2▽	x	13.10	55	60
	3	x	4.90	48	42		3▽	x	15.60	60	74
	4▽	x	6.20	55	60		4▽	x	19.40	65	67
	5▽	x	7.50	55	70		5▽	x	24.50	65	82
250	1	x	3.40	42	36	▽ d _d + 4 mm					
	2	x	4.32	48	49						
	3	x	5.30	48	42						
	4▽	x	7.00	55	60						
	5▽	x	7.85	60	70						
280	1	x	3.90	42	44						
	2	x	5.35	48	53						
	3	x	6.50	48	47						
	4▽	x	8.52	55	60						
	5▽	x	9.90	60	70						
300	1	x	4.25	48	44						
	2	x	5.90	48	53						
	3	x	7.50	55	47						
	4▽	x	9.82	55	60						
	5▽	x	11.30	60	70						
▽ d _d + 4 mm						▽ d _d + 4 mm					

No. of grooves z	1	2	3	4	5
Face width b ₂ (mm)	20	35	50	67	82

● Solid pulley
○ Plate pulley (with or without lightening holes)
× Spoked pulley
Hub position: flush one side
Material: GG 20 – DIN 1691

Standard Range

optibelt K5 V-Grooved Pulleys for Plain Boring –

Grooves According to BS 3790/DIN 2211



Section SPB/B/17																	
Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub l (mm)	Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub l (mm)						
56◆	1	○	0.61	20	41	112▲◆■	1	○	1.53	32	41						
	2	○	1.00	20	60		2	○	2.35	38	60						
	3	○	1.00	22	62		3	○	3.10	38	55						
63◆	1	○	0.76	20	41		4▽	○	4.75	42	67						
	2	○	1.20	20	60		5▽	○	5.61	42	75						
	3	○	1.20	22	62		6▽	○	6.15	42	85						
71◆	1	○	0.79	22	41	118▲◆■	1	○	1.57	32	41						
	2	○	1.31	22	60		2	○	2.43	38	60						
	3	○	1.60	22	55		3	○	3.20	42	55						
75◆	1	○	0.82	25	41		4▽	○	6.20	42	70						
	2	○	1.42	25	60		5▽	○	7.20	42	75						
	3	○	1.85	25	62		6▽	○	6.60	42	85						
80◆	1	○	1.03	28	41	125▲◆■	1	○	1.66	32	41						
	2	○	1.65	28	60		2	○	2.55	38	60						
	3	○	2.05	28	55		3	○	3.28	42	55						
	4▽	○	2.40	28	70		4▽	○	4.74	42	70						
	5▽	○	2.73	28	80		5▽	○	8.60	42	75						
85◆	1	○	1.10	30	41		6▽	○	8.00	48	85						
	2	○	1.70	30	60	132▲◆■	1	○	1.88	30	41						
	3	○	2.15	30	55		2	○	2.63	30	60						
	4▽	○	2.70	30	70		3	○	3.49	42	55						
	5▽	○	3.00	30	75		4▽	○	6.30	42	70						
90◆	1	○	1.17	32	41		5▽	○	9.40	42	75						
	2	○	1.80	38	60		6▽	○	8.50	42	85						
	3	○	2.30	38	55	140	1	○	2.10	32	41						
	4▽	○	3.05	38	70		2	○	2.90	38	60						
	5▽	○	3.30	38	75		3	○	3.90	42	55						
95◆	1	○	1.25	35	41		4▽	○	6.92	42	70						
	2	○	2.00	38	60		5▽	○	7.58	48	75						
	3	○	2.50	38	67		6▽	○	11.40	48	85						
	4▽	○	2.90	38	70	150	1	○	2.43	32	43						
	5▽	○	3.60	38	75		2	○	3.24	38	48						
100◆	1	○	1.32	32	41		3	○	4.28	42	60						
	2	○	2.11	38	60		4▽	○	6.76	42	70						
	3	○	2.85	38	55		5▽	○	8.43	48	75						
	4▽	○	3.81	38	70		6▽	○	12.10	48	85						
	5▽	○	4.45	38	75	160	1	x	2.50	38	43						
	6▽	○	5.20	38	124		2	x	3.32	42	48						
106◆	1	○	1.45	28	41		3	x	4.60	48	60						
	2	○	2.00	28	60		4▽	○	7.01	48	70						
	3	○	3.00	30	55		5▽	○	9.35	48	75						
	4▽	○	4.30	30	70		6▽	○	12.85	55	85						
	5▽	○	5.10	32	75	170	1	x	2.85	42	43						
	6▽	○	6.00	32	124		2	x	3.44	42	48						
							3	x	4.89	42	60						
							4▽	○	7.20	48	70						
							5▽	○	8.90	48	75						
							6▽	○	13.10	48	85						
												▽ d _d + 5,5 mm					
												▲ for section B/17 ◆ for section BX/X17 ■ for section XPB					

Standard Range

optibelt K5 V-Grooved Pulleys for Plain Boring –

Grooves According to BS 3790/DIN 2211



Section SPB/B/17											
Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub (mm)	Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub (mm)
180	1	x	3.10	38	43	315	1	x	6.40	48	49
	2	x	3.90	42	48		2	x	8.22	55	55
	3	x	5.28	48	60		3	x	12.90	55	67
	4▽	x	7.42	48	70		4▽	x	13.00	60	80
	5▽	○	9.05	55	75		5▽	x	17.60	65	80
	6▽	○	10.80	60	85		6▽	x	20.60	75	90
190	1	x	3.19	42	43	355	1	x	7.00	48	49
	2	x	4.22	42	48		2	x	9.70	55	55
	3	x	5.49	42	60		3	x	13.40	55	67
	4▽	x	7.69	48	70		4▽	x	18.25	60	80
	5▽	○	9.22	50	75		5▽	x	18.75	65	75
	6▽	○	11.95	55	85		6▽	x	19.75	75	90
200	1	x	3.40	38	43	400	1▽	x	8.46	50	49
	2	x	4.45	42	48		2▽	x	10.00	55	55
	3	x	5.85	48	60		3▽	x	14.30	60	67
	4▽	x	7.98	50	60		4▽	x	18.50	65	80
	5▽	○	9.50	55	80		5▽	x	22.50	70	85
	6▽	○	12.20	60	90		6▽	x	28.00	75	90
212	1	x	3.75	42	43	450	1▽	x	9.86	50	55
	2	x	4.66	42	48		2▽	x	10.87	55	55
	3	x	6.15	48	60		3▽	x	15.05	60	67
	4▽	x	7.70	50	70		4▽	x	20.50	65	80
	5▽	x	10.30	50	80		5▽	x	26.00	70	80
	6▽	○	13.51	55	90		6▽	x	28.90	75	90
225	1	x	4.00	42	43	500	1▽	x	10.70	50	55
	2	x	5.40	42	48		2▽	x	13.70	60	59
	3	x	6.90	48	60		3▽	x	15.20	65	67
	4▽	x	8.64	55	70		4▽	x	21.30	70	80
	5▽	○	11.72	50	90		5▽	x	30.00	75	80
	6▽	○	14.75	55	90		6▽	x	33.80	80	90
250	1	x	4.20	42	43	560	2▽	x	15.00	60	55
	2	x	6.10	48	55		3▽	x	24.20	65	67
	3	x	8.60	55	60		4▽	x	26.20	70	80
	4▽	x	9.70	60	70		5▽	x	34.40	75	80
	5▽	x	13.20	65	80		6▽	x	39.00	80	90
	6▽	x	17.00	65	90	630	2▽	x	20.20	60	80
280	1	x	5.70	48	49		3▽	x	27.00	65	80
	2	x	7.04	48	55		4▽	x	30.80	75	86
	3	x	9.67	55	60		5▽	x	37.20	80	90
	4▽	x	11.52	60	70		6▽	x	44.00	90	100
	5▽	x	15.50	65	80						
	6▽	x	18.00	65	90						
300	1	x	5.90	48	49						
	2	x	7.50	48	55						
	3	x	10.50	55	67						
	4▽	x	12.40	60	80						
	5▽	x	15.40	65	80						
	6▽	x	18.25	70	90						
▽ d _d + 5,5 mm											

No. of grooves z	1	2	3	4	5	6
Face width b ₂ (mm)	25	44	63	86	105	124

● Solid pulley
○ Plate pulley (with or without lightening holes)
x Spoked pulley
Hub position: flush one side
Material: GG 20 – DIN 1691

Standard Range

optibelt K5 V-Grooved Pulleys for Plain Boring –

Grooves According to BS 3790/DIN 2211




Section SPC/C/22																	
Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub l (mm)	Datum diameter d _d (mm)	No. of grooves	Type	Weight (≈ kg)	Finished bore d _{max} (mm)	Distance through hub l (mm)						
180▲◆■	1	○	4.20	40	54	450	2	x	21.10	70	80						
	2	○	7.20	50	64		3	x	26.30	75	90						
	3	○	10.40	55	90		4	x	31.10	75	105						
	4	○	10.50	55	95		5	x	42.20	80	110						
	5	○	18.00	60	100		6	x	48.50	80	120						
	6	○	23.70	65	115		500	3	x	28.40	75	90					
200▲◆■	1	○	4.80	40	54	4		x	34.10	75	105						
	2	○	7.80	50	64	5		x	48.20	80	110						
	3	○	10.60	55	90	6		x	52.50	80	120						
	4	○	11.20	60	95	560		3	x	31.10	75	90					
	5	○	15.40	65	100			4	x	39.00	75	105					
	6	○	27.00	70	125		5	x	54.10	85	110						
225	1	x	5.50	48	54		6	x	61.50	85	120						
	2	x	7.80	52	64		630	3	x	38.50	80	90					
	3	x	10.60	52	90			4	x	48.10	80	105					
	4	x	13.10	55	95	5		x	62.20	85	110						
	5	x	16.70	60	100	6		x	73.20	85	120						
	6	x	35.00	60	115												
250	1	x	7.30	52	54												
	2	x	8.80	52	64												
	3	x	11.10	65	90												
	4	x	15.30	70	95												
	5	x	19.00	75	100												
	6	x	23.70	60	115												
280	1	x	8.70	52	54												
	2	x	10.90	55	64												
	3	x	15.60	70	90												
	4	x	17.50	75	95												
	5	x	20.50	75	100												
315	1	x	9.10	52	54												
	2	x	13.00	55	74												
	3	x	17.10	70	90												
	4	x	20.00	75	95												
	5	x	24.70	80	100												
	6	x	31.20	85	115												
335	2	x	14.00	55	74												
	3	x	18.30	55	90												
	4	x	22.40	60	95												
	5	x	28.30	65	100												
	6	x	34.40	75	115												
	355	2	x	15.20	60		74										
3		x	19.20	70	90												
4		x	25.80	70	95												
5		x	32.00	75	100												
6		x	36.20	75	115												
400		3	x	20.60	70		90										
	4	x	28.00	70	105												
	5	x	32.00	75	100												
▲ for section C/22 ◆ for section CX/X22 ■ for section XPC																	

No. of grooves z	1	2	3	4	5	6
Face width b ₂ (mm)	38	64	90	116	142	168

● Solid pulley
○ Plate pulley (with or without lightening holes)
× Spoked pulley
Hub position: flush one side
Material: GG 20 – DIN 1691


Standard Range

optibelt *RE* Variable Speed Pulleys

[illegible]


Standard Range

optibelt *RE* Variable Speed Pulleys

[illegible]

Standard Range

optibelt RE Variable Speed Pulleys



Variable speed pulleys for taper bushes

Material: GG

[illegible]

Taper bush	1008	1108	1215	1615
bore d ₂ (mm) from ... to ...	10-25	10-28	11-32	14-42

GG = cast iron
Rights to technical modification reserved
Bore diameter d_2 see page 66

Standard Range
optibelt TB Taper Bushes



Taper bushes with metrical bore, grooves according to DIN 6885 Part 1																
	Taper bush															
	1008	1108	1210	1215	1310	1610	1615	2012	2517	3020	3030	3525	3535	4040	4545	5050
Bore diameter d ₂ (mm)	10	10	11	11	14	14	14	14	16	25	35	35	35	40	55	70
	11	11	12	12	16	16	16	16	18	28	38	38	38	42	60	75
	12	12	14	14	18	18	18	18	19	30	40	40	40	45	65	80
	14	14	16	16	19	19	19	19	20	32	42	42	42	48	70	85
	16	16	18	18	20	20	20	20	22	35	45	45	45	50	75	90
	18	18	19	19	22	22	22	22	24	38	48	48	48	55	80	95
	19	19	20	20	24	24	24	24	25	40	50	50	50	60	85	100
	20	20	22	22	25	25	25	25	28	42	55	55	55	65	90	105
	22	22	24	24	28	28	28	28	30	45	60	60	60	70	95	110
	24▲	24	25	25	30	30	30	30	32	48	65	65	65	75	100	115
	25▲	25	28	28	32	32	32	32	35	50	70	70	70	80	105	120
		28▲	30	30	35	35	35	35	38	55	75	75	75	85	110	125
			32	32		38	38	38	40	60		80	80	90		
						40	40	40	42	65		85	85	95		
						42▲	42▲	42	45	70		90	90	100		
								45	48	75						
								48	50							
								50	55							
									60							
Material: GG 20																
Tightening torque (Nm)	5.7	5.7	20	20	20	20	20	31	49	92	92	115	115	172	195	275
Bush length (mm)	22.3	22.3	25.4	38.1	25.4	25.4	38.1	31.8	44.5	50.8	76.2	63.5	88.9	101.6	114.3	127.0
Weight for d _{2 min} (≈ kg)	0.12	0.16	0.28	0.39	0.32	0.41	0.60	0.75	1.06	2.50	3.75	3.90	5.13	7.68	12.70	15.17

▲ This is a shallow keyway bore.

Shallow keyway taper bushes

Bore diameter d ₂ (mm)	Groove width b (mm)	Groove depth t ₂ (mm)	Bore diameter d ₂ (mm)	Groove width b (mm)	Groove depth t ₂ (mm)
24	8	2.0	28	8	2.0
25	8	1.3	42	12	2.2

Taper bushes with inch bore, keyways according to British Standard BS 46 Part 1																
	Taper bush															
	1008	1108	1210	1215	1310	1610	1615	2012	2517	3020	3030	3525	3535	4040	4545	5050
Bore diameter d ₂ (inch)	3/8*	3/8*	1/2	5/8*	1/2*	1/2	1/2	5/8*	3/4	1 1/4	1 1/4	1 1/2	1 1/2	1 3/4*	2 1/4*	3*
	1/2	1/2	5/8	3/4	5/8*	5/8	5/8	3/4	7/8	1 3/8	1 3/8	1 5/8	1 5/8	1 7/8*	2 3/8*	3 1/4*
	5/8	5/8	3/4	7/8	3/4*	3/4	3/4	7/8	1	1 1/2	1 1/2	1 3/4	1 3/4	2*	2 1/2*	3 1/2*
	3/4	3/4	7/8	1	7/8*	7/8	7/8	1	1 1/8	1 5/8	1 5/8	1 7/8	1 7/8	2 1/8*	2 3/4*	3 3/4*
	7/8	7/8	1	1 1/8	1*	1	1	1 1/8	1 1/4	1 3/4*	1 3/4*	2	2	2 1/4*	2 7/8*	4*
	1▲	1	1 1/8	1 1/4	1 1/8	1 1/8	1 1/8	1 1/4	1 3/8	1 7/8	1 7/8	2 1/8	2 1/8	2 3/8*	3*	4 1/4*
		1 1/8▲*	1 1/4		1 1/4	1 1/4	1 1/4	1 3/8	1 1/2	2	2	2 1/4	2 1/4	2 1/2*	3 1/4*	4 1/2*
					1 3/8	1 3/8	1 3/8	1 1/2	1 5/8	2 1/8*	2 1/8*	2 3/8	2 3/8	2 5/8*	3 3/8*	4 3/4*
						1 5/8	1 5/8	1 5/8	1 3/4	2 1/4	2 1/4	2 1/2	2 1/2	2 3/4*	3 1/2*	5▲*
							1 5/8▲*	1 3/4	1 7/8	2 3/8	2 3/8	2 5/8	2 5/8	2 7/8*	3 3/4*	
								1 7/8	2	2 1/2	2 1/2	2 3/4	2 3/4	3*	4*	
								2	2 1/8	2 5/8	2 5/8*	2 7/8	2 7/8	3 1/8*	4 1/4▲*	
									2 1/4	2 3/4	2 3/4*	3	3	3 1/4*	4 1/2▲*	
									2 3/8	2 7/8	2 7/8	3 1/8	3 1/8	3 3/8*		
									2 1/2	3	3	3 1/4	3 1/4	3 1/2*		
												3 3/8	3 3/8	3 3/4▲*		
												3 1/2▲	3 1/2▲	4▲*		
Material: GG 20																
Tightening torque (Nm)	5.7	5.7	20	20	20	20	20	31	49	92	92	115	115	172	195	275
Bush length (mm)	22.3	22.3	25.4	38.1	25.4	25.4	38.1	31.8	44.5	50.8	76.2	63.5	88.9	101.6	114.3	127.0
Weight for d _{2 min} (≈ kg)	0.12	0.16	0.28	0.39	0.32	0.41	0.60	0.75	1.06	2.50	3.75	3.90	5.13	7.68	12.70	15.17

Drive Calculation


Abbreviations Used in Formulae



a	= drive centre distance provisional	(mm)	L_{dSt}	= standard belt datum length	(mm)
a_{nom}	= drive centre distance calculated with a standard belt length	(mm)	L_{dth}	= calculated belt datum length	(mm)
b_d	= datum width	(mm)	n_g	= speed of the larger pulley	(min ⁻¹)
b_1	= top width	(mm)	n_k	= speed of the smaller pulley	(min ⁻¹)
c_1	= arc of contact correction factor		n_1	= speed of the driver pulley	(min ⁻¹)
c_2	= service factor		n_2	= speed of the driven pulley	(min ⁻¹)
c_3	= belt length factor		P	= motor or normal running power	(kW*)
c_4	= number of idlers factor		P_B	= design power	(kW*)
d_{dg}	= datum diameter of large pulley (selection to BS 3790/DIN 2211)	(mm)	P_N	= nominal power rating per belt	(kW*)
d_{dk}	= datum diameter of small pulley (selection to BS 3790/DIN 2211)	(mm)	S_a	= minimum static shaft loading	(N)
d_{d1}	= datum diameter of the driver pulley	(mm)	T	= minimum static tension per belt	(N)
d_{d2}	= datum diameter of the driven pulley	(mm)	v	= belt speed	(m/s)
E	= belt deflection per 100 mm span length	(mm)	U_d	= datum circumference of pulley	
E_a	= belt deflection for a given span length	(mm)	x	= minimum allowance above centre distance a_{nom} for belt stretch and wear	(mm)
f	= load used to set belt tension	(N)	y	= minimum allowance below centre distance a_{nom} for easy belt fitting	(mm)
f_B	= flex rate	(s ⁻¹)	z	= number of belts $\frac{\beta}{2}$	
i	= drive ratio		α	= angle of belt drive = 90° –	(°)
k	= constant for calculating centrifugal force in belt set		β	= arc of contact on small pulley	(°)
L	= span length	(mm)			
L_{iSt}	= standard inside belt length	(mm)			
L_{ith}	= calculated inside belt length	(mm)			

* 1 kW = 1 kNm/s

The terms pitch diameter (d_w), pitch length (L_w) and pitch circumference (U_w) used previously have been changed to datum diameter (d_d), datum length (L_d) and datum circumference (U_d) in order to bring them into line with current standard terminology.

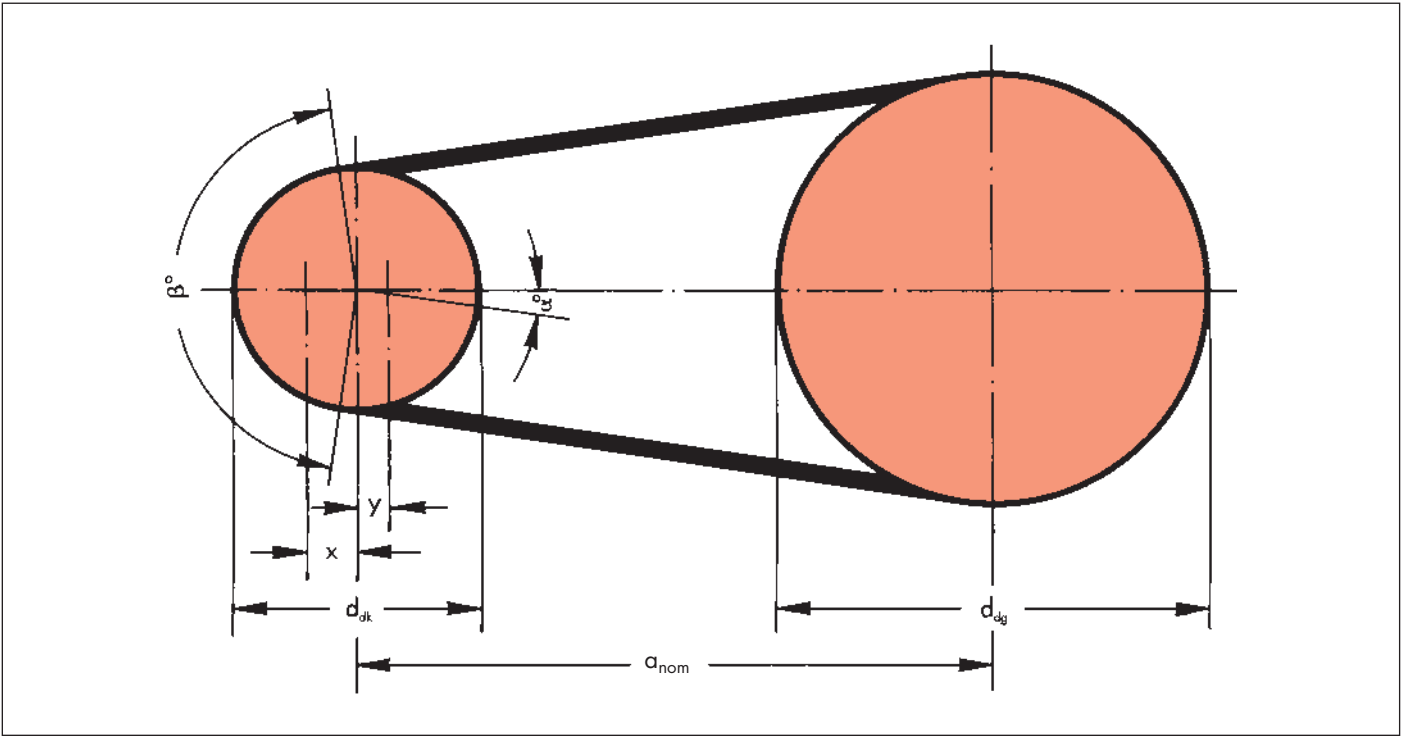

Drive Calculation

Optibelt Nominal Power Rating P_N – Arc of Contact Correction Factor c_1



The Optibelt nominal power ratings P_N in Tables 27 to 55 are based upon an internationally recognised basic formula and a theoretical belt life of 25,000 hours under ideal conditions. This formula contains material constants that take into account the quality of the raw materials used and make allowances for production methods. The special qualities of Optibelt V-belts make it possible for example to use other material constants than those given in BS/DIN Standards. As a result, the nominal Optibelt power ratings P_N significantly exceed the ratings given, for wedge belts in BS 3790 and DIN 7753 Part 2 and for classical V-belts in BS 3790 and DIN 2218, for the same theoretical belt life. The nominal power ratings P_N are based on the smallest loaded pulley in the drive system. The belt power rating value P_N is calculated taking into account

- the datum diameter of the smaller pulley d_{dk} ,
- the speed of the smaller pulley n_k ,
- the drive ratio i ,
- an assumed arc of contact at the smaller pulley of $\beta = 180^\circ$,
- a reference belt length for the specific belt section.

In order to account for the true drive data, based on the arc of contact and the belt lengths employed, correction factors for the arc of contact c_1 and length c_3 have been introduced.

If required, drive calculations can be provided for any theoretical belt life.

Intermediate values for nominal power rating, arc of contact and length correction factors can be found by linear interpolation.

The factor c_1 corrects the power rating P_N , when the arc of contact is smaller than 180° , as the P_N value was calculated on the arc of contact $\beta = 180^\circ$ on the smaller pulley.

Table 17

$\frac{d_{dg} - d_{dk}}{a_{nom}}$	$\beta \approx$	c_1
0	180°	1.00
0.05	177°	1.00
0.10	174°	1.00
0.15	171°	1.00
0.20	168°	0.99
0.25	165°	0.99
0.30	162°	0.99
0.35	160°	0.99
0.40	156°	0.99
0.45	153°	0.98
0.50	150°	0.98
0.55	147°	0.98
0.60	144°	0.98
0.65	141°	0.97
0.70	139°	0.97
0.75	136°	0.97
0.80	133°	0.96
0.85	130°	0.96
0.90	126°	0.96
0.95	123°	0.95
1.00	119°	0.94
1.05	115°	0.94
1.10	112°	0.93
1.15	109°	0.93
1.20	106°	0.92
1.25	103°	0.91
1.30	100°	0.91
1.35	96°	0.90
1.40	92°	0.88
1.45	88°	0.87
1.50	84°	0.86
1.55	80°	0.84
1.60	77°	0.83

Drive Calculation

Service Factor c_2



The service factor c_2 takes account of the daily operating time and of the type of driver and driven machine. It applies exclusively to two-pulley drives. Other arrangements such as drives with tension and guide idlers have not been taken into consideration. Pages 115-117 provide the relevant basic design guidelines for drives with more than two pulleys.

Adverse operating conditions (e.g. aggressive dust, particularly high ambient temperatures or the effects of various media) **have not** been taken into account. As it is practically impossible to cover every conceivable combination of driver/driven machine/operating conditions in a summary that complies with the relevant standards, the service factors are **approximate values**.

In special cases, e.g. increased starting torque (direct on-line starting of fans), on drives with frequent starts and stops, on systems subject to exceptional shock loads, or when significant masses are to be accelerated or braked, the service factor must be increased.

Empirical value:

With a starting torque > 1.8, this figure is to be divided by 1.5 in order to calculate the minimum service factor c_2 . Example: Starting torque MA = 3.0; c_2 selected 2.0. Please consult our Applications Engineering Department for the solution of special problems.

Table 18

Types of Driven Machine	Types of Prime Movers					
	A. c. motors and three-phase squirrel cage motors with a normal starting torque (up to 1.8 times nominal torque), e.g. synchronous motors and single-phase motors with starting-aid phase, three-phase squirrel cage motors with direct start, star-delta connection or slip ring starters; direct-current shunt-wound motors, combustion engines and turbines n > 600 rpm			A. c. motors and three-phase squirrel cage motors with high starting torque (over 1.8 times nominal torque), e.g. single-phase motors with high starting torque; direct-current series-wound motors with series connection and compound; combustion engines and turbines n ≤ 600 rpm		
	Service factor c_2 for daily operation time of (hours) up to 10 over 10 below 16 over 16			Service factor c_2 for daily operation time of (hours) up to 10 over 10 below 16 over 16		
Light drives Centrifugal pumps and compressors, belt conveyors (lightweight materials), fans and pumps up to 7.5 kW	1.1	1.1	1.2	1.1	1.2	1.3
Medium drives Plate cutters, presses, chain and belt conveyors (heavy materials), screen vibrators, generators and exciters, bakery machinery, machine tools (lathes and grinders), laundry machinery, printing machines, fans and pumps over 7.5 kW	1.1	1.2	1.3	1.2	1.3	1.4
Heavy-duty drives Crushing plants, piston compressors, heavy-duty conveyors, directional throw conveyors, push conveyors (screw, plate belts, bucket and shovel conveyors), lifts, brick presses, textile machinery, paper machinery, piston pumps, dredger pumps, saw mills, hammer mills	1.2	1.3	1.4	1.4	1.5	1.6
Very heavy duty drives Heavy-duty mills, stone crushers, calendars, mixers, winches, cranes, dredgers, heavy duty wood working machinery	1.3	1.4	1.5	1.5	1.6	1.8

Drive Calculation

Length Factor c_3 for **optibelt** Wedge Belts and Kraftbands



The length factor c_3 takes into account the flex rate of the belt based on the reference length for the particular belt section.

This results in the following relationships:
Belt length > reference length $c_3 > 1,0$
Belt length = reference length $c_3 = 1,0$
Belt length < reference length $c_3 < 1,0$

Table 19

Section SPZ, XPZ		Section SPA, XPA		Section SPB, XPB		Section SPC, XPC	
Datum length (mm)	c_3	Datum length (mm)	c_3	Datum length (mm)	c_3	Datum length (mm)	c_3
630	0.83	800	0.81	1250	0.83	2000	0.85
670	0.84	850	0.82	1320	0.84	2120	0.86
710	0.85	900	0.83	1400	0.85	2240	0.86
750	0.86	950	0.84	1500	0.86	2360	0.87
800	0.87	1000	0.85	1600	0.87	2500	0.88
850	0.88	1060	0.86	1700	0.88	2650	0.89
900	0.89	1120	0.86	1800	0.89	2800	0.90
950	0.90	1180	0.87	1900	0.90	3000	0.91
1000	0.91	1250	0.88	2000	0.91	3150	0.91
1060	0.92	1320	0.89	2120	0.92	3350	0.92
1120	0.93	1400	0.90	2240	0.93	3550	0.93
1180	0.94	1500	0.91	2360	0.93	3750	0.94
1250	0.95	1600	0.92	2500	0.94	4000	0.95
1320	0.96	1700	0.93	2650	0.95	4250	0.96
1400	0.98	1800	0.94	2800	0.96	4500	0.97
1500	0.99	1900	0.95	3000	0.97	4750	0.98
1600	1.00	2000	0.96	3150	0.98	5000	0.98
1700	1.01	2120	0.97	3350	0.99	5300	0.99
1800	1.02	2240	0.98	3550	1.00	5600	1.00
1900	1.03	2360	0.99	3750	1.01	6000	1.01
2000	1.04	2500	1.00	4000	1.02	6300	1.02
2120	1.05	2650	1.01	4250	1.03	6700	1.03
2240	1.06	2800	1.02	4500	1.04	7100	1.04
2360	1.07	3000	1.03	4700	1.04	7500	1.04
2500	1.08	3150	1.04	5000	1.05	8000	1.05
2650	1.09	3350	1.05	5300	1.06	8500	1.06
2800	1.10	3550	1.06	5600	1.07	9000	1.07
3000	1.11	3750	1.07	6000	1.08	9500	1.08
3150	1.12	4000	1.08	6300	1.09	10000	1.09
3350	1.13	4250	1.09	6700	1.10	10600	1.09
3550	1.15	4500	1.10	7100	1.11	11200	1.10
3750	1.16	4750	1.11	7500	1.12	11800	1.11
4000	1.17	5000	1.12	8000	1.13	12500	1.12
4250	1.18	5300	1.13	8500	1.14	13200	1.13
4500	1.19	5600	1.14	9000	1.15	14000	1.14
		6000	1.15	9500	1.16	15000	1.15
				10000	1.17		

Drive Calculation

Length Factor c_3 for **optibelt** Wedge Belts and Kraftbands



Table 20

Section 3V/9N, 3VX/9NX 3V/9J, 3VX/9JX			Section 5V/15N, 5VX/15NX 5V/15J, 5VX/15JX			Section 8V/25N 8V/25J		
Belt designation	Outside length (mm)	c_3	Belt designation	Outside length (mm)	c_3	Belt designation	Outside length (mm)	c_3
3V 265	673	0.84	5V 500	1270	0.84	8V 1000	2540	0.87
3V 280	711	0.85	5V 530	1346	0.85	8V 1060	2692	0.87
3V 300	762	0.86	5V 560	1422	0.85	8V 1120	2845	0.88
3V 315	800	0.87	5V 600	1524	0.87	8V 1180	2997	0.89
3V 335	851	0.88	5V 630	1600	0.87	8V 1250	3175	0.90
3V 355	902	0.90	5V 670	1702	0.88	8V 1320	3353	0.91
3V 375	952	0.91	5V 710	1803	0.89	8V 1400	3556	0.92
3V 400	1016	0.92	5V 750	1905	0.90	8V 1500	3810	0.93
3V 425	1079	0.93	5V 800	2032	0.91	8V 1600	4064	0.93
3V 450	1143	0.94	5V 850	2159	0.92	8V 1700	4318	0.94
3V 475	1206	0.95	5V 900	2286	0.93	8V 1800	4572	0.95
3V 500	1270	0.96	5V 950	2413	0.94	8V 1900	4826	0.96
3V 530	1346	0.97	5V 1000	2540	0.95	8V 2000	5080	0.97
3V 560	1422	0.98	5V 1060	2692	0.96	8V 2120	5385	0.98
3V 600	1524	0.99	5V 1120	2845	0.96	8V 2240	5690	0.98
3V 630	1600	1.00	5V 1180	2997	0.97	8V 2360	5994	0.99
3V 670	1702	1.01	5V 1250	3175	0.98	8V 2500	6350	1.00
3V 710	1803	1.02	5V 1320	3353	0.99	8V 2650	6731	1.01
3V 750	1905	1.03	5V 1400	3556	1.00	8V 2800	7112	1.02
3V 800	2032	1.04	5V 1500	3810	1.01	8V 3000	7620	1.03
3V 850	2159	1.05	5V 1600	4064	1.02	8V 3150	8001	1.03
3V 900	2286	1.07	5V 1700	4318	1.03	8V 3350	8509	1.04
3V 950	2413	1.07	5V 1800	4572	1.04	8V 3550	9017	1.05
3V 1000	2540	1.08	5V 1900	4826	1.05	8V 3750	9525	1.06
3V 1060	2692	1.09	5V 2000	5080	1.06	8V 4000	10160	1.07
3V 1120	2845	1.11	5V 2120	5385	1.07	8V 4250	10795	1.08
3V 1180	2997	1.11	5V 2240	5690	1.07	8V 4500	11430	1.09
3V 1250	3175	1.13	5V 2360	5994	1.08	8V 4750	12065	1.09
3V 1320	3353	1.14	5V 2500	6350	1.09	8V 5000	12700	1.10
3V 1400	3556	1.15	5V 2650	6731	1.10	8V 5300	13462	1.11
3V 1500	3810	1.16	5V 2800	7112	1.11	8V 5600	14224	1.12
3V 1600	4064	1.17	5V 3000	7620	1.12	8V 6000	15240	1.13
3V 1700	4318	1.18	5V 3150	8001	1.13	8V 6300	16002	1.13
3V 1800	4572	1.19	5V 3350	8509	1.14			
3V 1900	4826	1.20	5V 3550	9017	1.15			
3V 2000	5080	1.21	5V 3750	9525	1.16			
			5V 4000	10160	1.17			

Drive Calculation

Length Factor c_3 for **optibelt** Classical Belts and Kraftbands



Table 21

Section 5*		Section Y/6*		Section 8		Section Z/10, ZX/X10		Section A/13, AX/X13		Section B/17, BX/X17		Section 20	
Datum length (mm)	c_3	Datum length (mm)	c_3	Datum length (mm)	c_3	Datum length (mm)	c_3	Datum length (mm)	c_3	Datum length (mm)	c_3	Datum length (mm)	c_3
172	0.87	280	0.97	299*	0.86	422*	0.86	660	0.80	900	0.81	948	0.75
202	0.91	295	0.99	334*	0.88	447*	0.87	740	0.82	990	0.83	998	0.76
248	0.95	315	1.00	374*	0.91	472*	0.88	780	0.83	1040	0.84	1048	0.77
277	0.97	330	1.01	419*	0.93	497*	0.89	830	0.85	1100	0.85	1168	0.79
292	0.99	350	1.02	444*	0.94	522*	0.90	880	0.86	1140	0.85	1228	0.80
312	1.00	370	1.04	469*	0.95	552*	0.92	930	0.87	1220	0.87	1298	0.81
327	1.01	390	1.05	494*	0.97	582*	0.93	980	0.88	1290	0.88	1368	0.82
334	1.01	415	1.06	549*	0.99	622	0.94	1030	0.89	1360	0.89	1448	0.83
347	1.02	440	1.07	579*	1.00	652	0.95	1090	0.90	1440	0.90	1548	0.85
364	1.03	465	1.09	594*	1.01	692	0.96	1150	0.91	1540	0.92	1648	0.86
387	1.05	490	1.10	619*	1.01	732	0.98	1210	0.92	1640	0.93	1848	0.88
418	1.06	515	1.11	649*	1.02	822	1.00	1280	0.94	1740	0.94	2048	0.91
437	1.07	555	1.13	689*	1.04	847	1.01	1350	0.95	1840	0.95	2168	0.92
487	1.10	615	1.15	729*	1.05	887	1.02	1430	0.96	1940	0.97	2298	0.93
512	1.11	725	1.19	769*	1.06	922	1.02	1530	0.97	2040	0.98	2408	0.94
524	1.11	765	1.20	819*	1.08	947	1.03	1630	0.99	2160	0.99	2548	0.95
542	1.12	865	1.23	869	1.09	997	1.04	1730	1.00	2280	1.00	2698	0.96
566	1.13			894	1.10	1022	1.05	1830	1.01	2400	1.01	2848	0.98
612	1.15			919	1.10	1082	1.06	1930	1.02	2590	1.03	3048	0.99
				969	1.11	1142	1.07	2030	1.03	2690	1.04	3198	1.00
				1019	1.13	1172	1.08	2150	1.05	2840	1.05	3398	1.01
				1139	1.15	1202	1.08	2270	1.06	3040	1.06	3598	1.03
				1269	1.18	1272	1.10	2390	1.07	3190	1.07	3798	1.04
				1339	1.19	1342	1.11	2530	1.08	3390	1.09	4048	1.05
				1419	1.20	1422	1.12	2680	1.10	3590	1.10	4298	1.06
				1519	1.22	1522	1.14	2830	1.11	3790	1.11	4548	1.08
						1622	1.15	3030	1.12	4040	1.13	4798	1.09
								3180	1.14	4290	1.14	5048	1.10
								3380	1.15	4540	1.15	5348	1.11
								3780	1.17	4790	1.17	5648	1.13
								4030	1.19	5040	1.18	6048	1.14
								4530	1.22	5340	1.19	6348	1.15
								5030	1.24	5640	1.20	7148	1.18
										6040	1.22	8048	1.21
										6340	1.23		
Section C/22, CX/X22				Section 25				Section D/32				Section E/40	
1458	0.80	5058	1.06	1311	0.75	4311	0.99	3225	0.86	10075	1.10	4830	0.92
1558	0.81	5358	1.07	1461	0.77	4561	1.00	3425	0.87	10675	1.11	5080	0.93
1658	0.83	5658	1.09	1561	0.78	4811	1.01	3625	0.88	11275	1.13	5380	0.94
1858	0.85	6058	1.10	1661	0.79	5061	1.02	3825	0.89	11875	1.14	5680	0.95
1958	0.86	6358	1.11	1761	0.80	5361	1.04	4075	0.91	12575	1.15	6080	0.96
2058	0.87	6758	1.13	1861	0.81	5661	1.05	4325	0.92	13275	1.16	6380	0.97
2178	0.88	7158	1.14	1961	0.82	6061	1.06	4575	0.93	14075	1.18	6780	0.99
2298	0.89	7558	1.15	2061	0.83	6361	1.07	4825	0.94	15075	1.19	7180	1.00
2418	0.90	8058	1.17	2181	0.85	6761	1.09	5075	0.95	16075	1.21	7580	1.01
2558	0.92	9058	1.19	2301	0.86	7161	1.10	5375	0.96			8080	1.03
2708	0.93	10058	1.22	2421	0.87	7561	1.11	5675	0.98			8580	1.04
2858	0.94			2561	0.88	8061	1.13	6075	0.99			9080	1.05
3058	0.95			2711	0.89	9061	1.15	6375	1.00			9580	1.06
3208	0.96			2861	0.90	10061	1.18	6775	1.01			10080	1.07
3608	0.99			3061	0.92	11261	1.20	7175	1.03			10680	1.09
3808	1.00			3211	0.93	12561	1.23	7575	1.04			11280	1.10
4058	1.01			3411	0.94			8075	1.05			11880	1.11
4308	1.03			3611	0.95			8575	1.06			12580	1.12
4558	1.04			3811	0.96			9075	1.08			13280	1.14
4808	1.05			4061	0.98			9575	1.09			14080	1.15
												15080	1.17
												16080	1.18

* Raw edge, moulded cogged V-belts

Drive Calculation

Guidelines for Selecting V-Belt and Kraftband Sections



By using the following diagrams, the most suitable belt section as far as efficiency and size are concerned, can be selected for a specific application. The most efficient power transmission is achieved by selecting as large a pulley diameter as possible for the section in question. The limits to be observed are the maximum permissible circumferential speed, namely

for high performance wedge belts $v_{max} \approx 55 \text{ m/s}^*$,
for classical V-belts $v_{max} \approx 30 \text{ m/s}$.

Experience has shown that the minimum pulley diameters should be avoided. These drives require a larger number of belts needing wider pulleys, and are therefore more costly.

In borderline cases it is recommended that the next smaller section belt be used on the same diameter pulley, as the smaller section will often save both cost and space. A further recommended solution is the use of the raw edge Optibelt SUPER TX M=S V-belts, Super X-POWER wedge belts or RED POWER II wedge belts.


In such boundary areas it is advisable to design the drive with both sections and then to select the most suitable, because for using the same pulley diameter the small section saves costs and space.

For other solutions we are recommending to use Optibelt Super X-POWER M=S V-belts similarly there is a inspection advisable, if the intersection point from the useable range diagram is in limit between two profiles.

Comparing space requirement and costs, the wedge belt normally proves to be significantly superior to the classical V-belt for almost all industrial machinery drives. For this reason, new designs use wedge belts almost exclusively. It is only in special cases, for replacement requirements and with V-flat drives, that the use of classical section V-belts will be necessary.

* Important note: where $V > 42 \text{ m/s}$ please consult our Applications Engineering Department

Diagram 1: Optibelt VB classical V-belts to BS 3790/DIN 2215

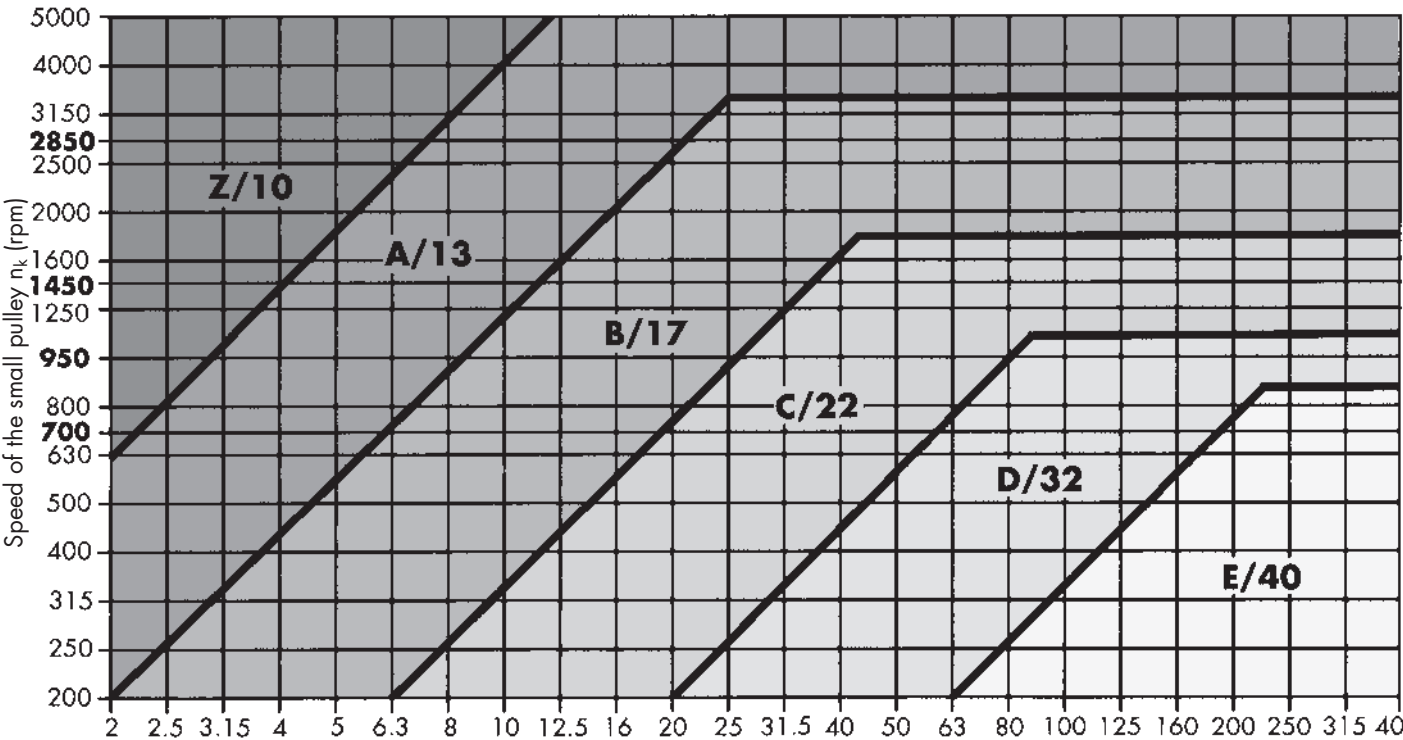

Drive Calculation

Guidelines for Selecting V-Belt and Kraftband Sections



Diagram 2: Optibelt SK wedge belts to BS 3790/DIN 7753 Part 1


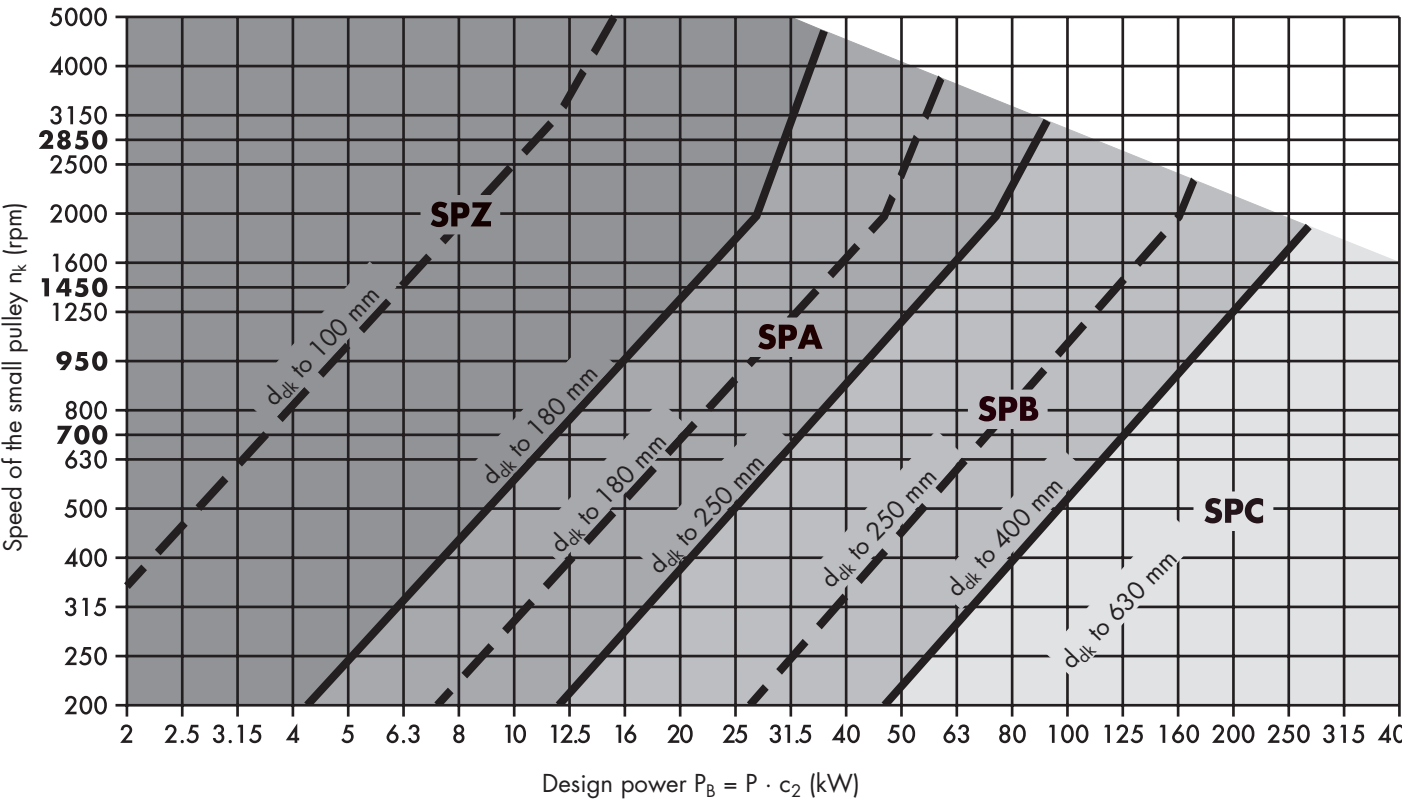


Diagram 3: Optibelt SK wedge belts to USA Standard RMA/MPTA

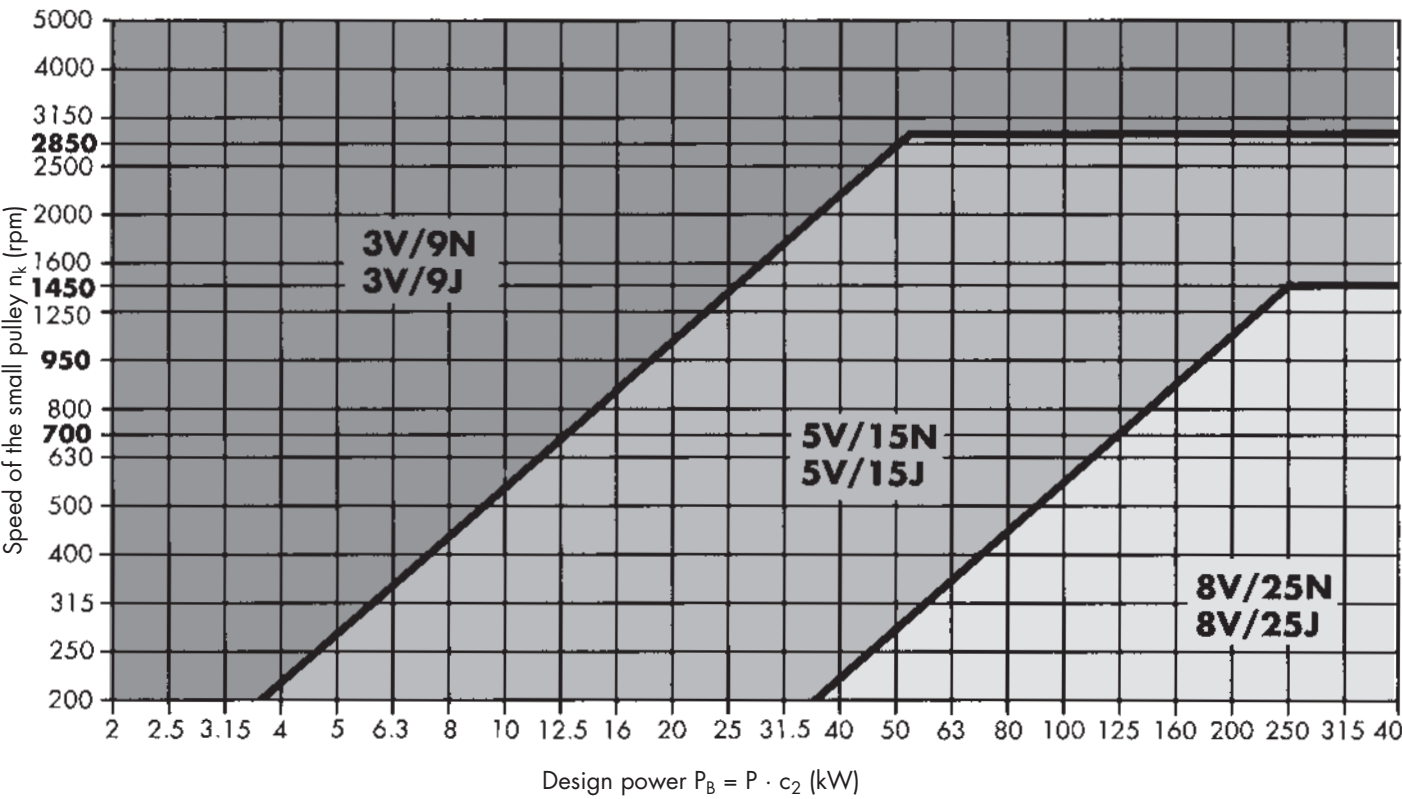

Drive Calculation

Guidelines for Selecting V-Belt and Kraftband Sections



Diagram 4: Optibelt Super X-POWER M=S wedge belts


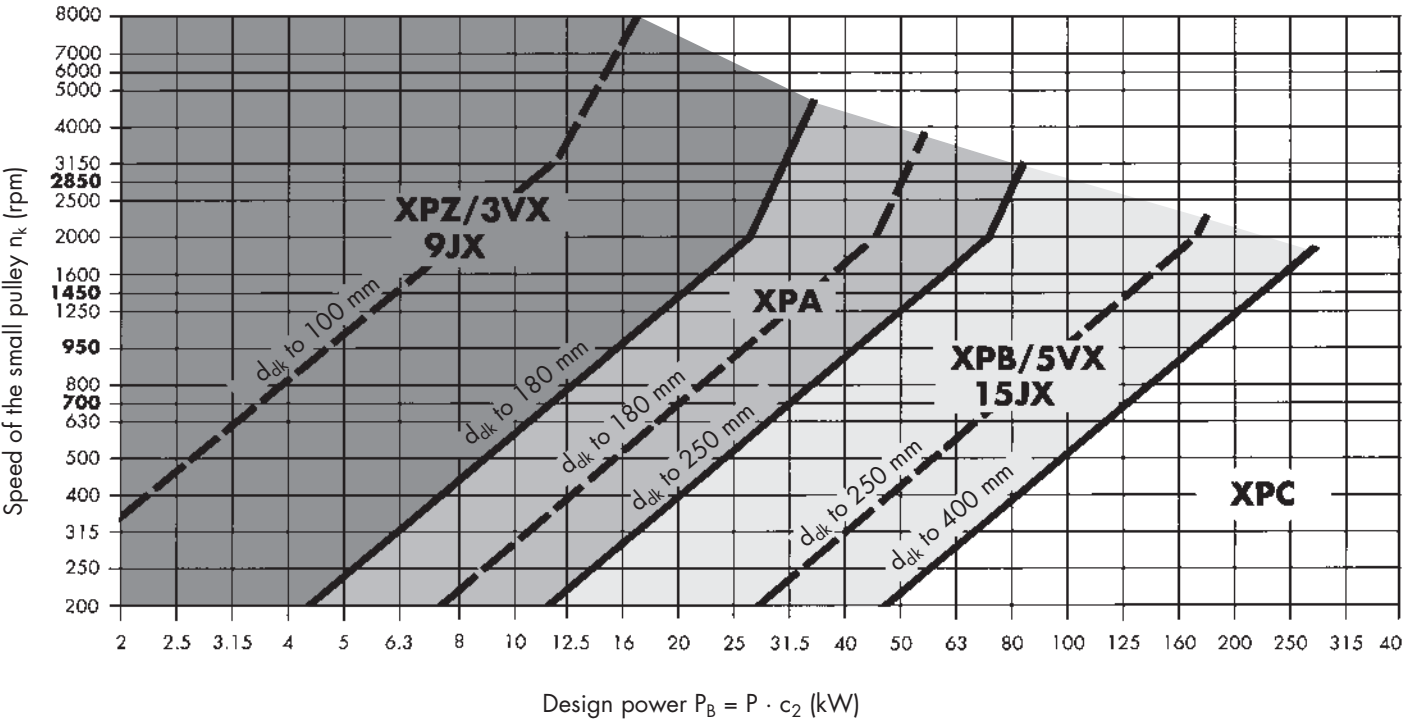


Diagram 5: Optibelt SUPER TX M=S V-belts

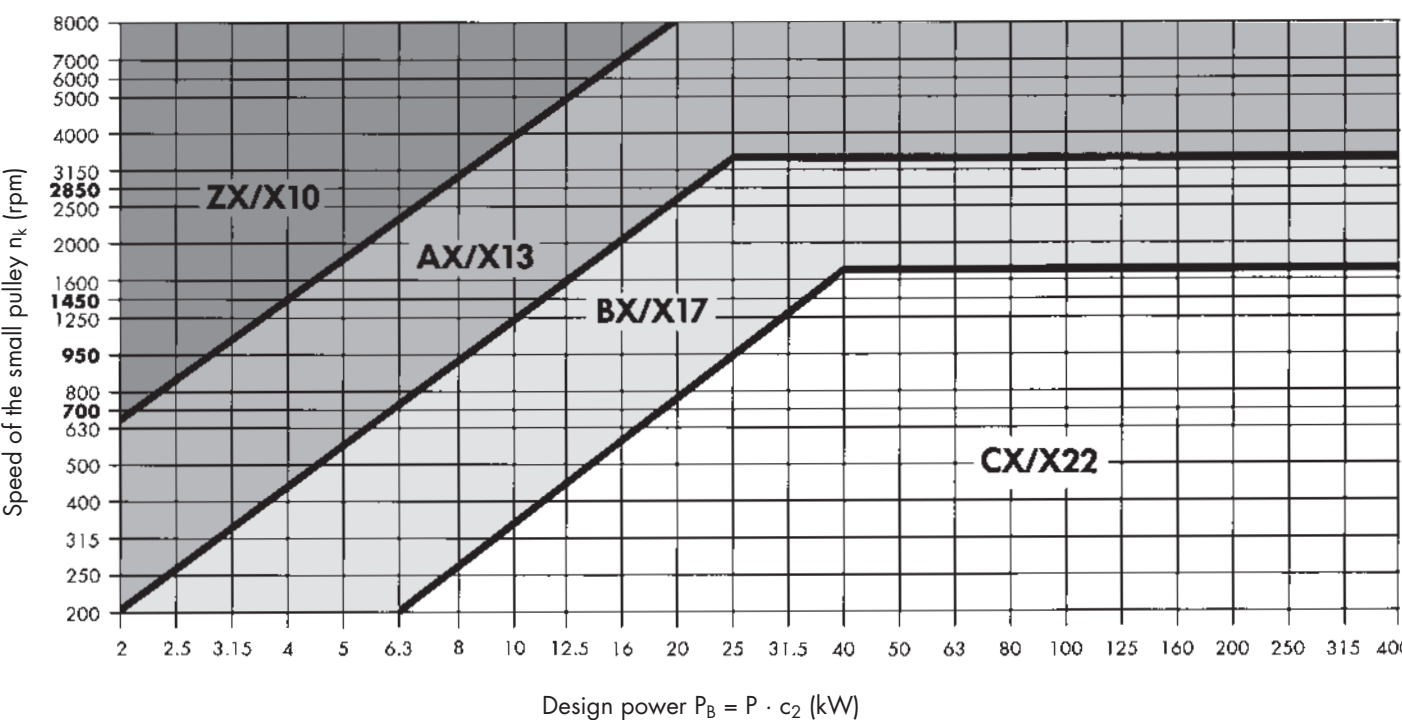

Drive Calculation

Minimum Allowance x/y for Adjusting Drive Centre Distance a_{nom}



Table 22: Optibelt SK wedge belts

Datum length (mm)	Minimum allowance x (mm) – for tensioning	Minimum allowance y (mm) – for fitting			
		SPZ, XPZ	SPA, XPA	SPB, XPB	SPC, XPC
487 ≤ 670	10	10	10	—	—
> 670 ≤ 1 000	15	15	15	—	—
> 1 000 ≤ 1 250	20	15	15	—	—
> 1 250 ≤ 1 800	25	20	20	20	—
> 1 800 ≤ 2 240	25	20	20	20	25
> 2 240 ≤ 3 000	35	20	20	20	30
> 3 000 ≤ 4 000	45	20	20	20	30
> 4 000 ≤ 5 000	55	20	20	25	30
> 5 000 ≤ 6 300	70	25	25	30	35
> 6 300 ≤ 8 000	85	25	25	35	40
> 8 000 ≤ 10 000	110	30	30	35	45
> 10 000 ≤ 12 500	135	—	—	35	45
> 12 500 ≤ 15 000	150	—	—	45	55
> 15 000 ≤ 18 000	190	—	—	45	55

Table 23: Optibelt SK wedge belts

Length designation	Outside length (mm)	Minimum allowance x (mm) – for tensioning	Minimum allowance y (mm) – for fitting		
			3V/9N, 3VX/9NX	5V/15N, 5VX/15NX	8V/25N
> 265 ≤ 400	> 673 ≤ 1 016	15	15	—	—
> 400 ≤ 475	> 1 016 ≤ 1 206	20	15	—	—
> 475 ≤ 710	> 1 206 ≤ 1 803	25	20	20	—
> 710 ≤ 850	> 1 803 ≤ 2 159	25	20	20	—
> 850 ≤ 1 180	> 2 159 ≤ 2 997	35	20	20	40
> 1 180 ≤ 1 600	> 2 997 ≤ 4 064	45	20	20	40
> 1 600 ≤ 2 000	> 4 064 ≤ 5 080	55	20	25	40
> 2 000 ≤ 2 500	> 5 080 ≤ 6 350	70	—	30	45
> 2 500 ≤ 3 150	> 6 350 ≤ 8 001	85	—	35	45
> 3 150 ≤ 4 000	> 8 001 ≤ 10 160	110	—	35	50
> 4 000 ≤ 5 000	> 10 160 ≤ 12 700	135	—	35	50
> 5 000 ≤ 6 000	> 12 700 ≤ 15 240	150	—	45	60
> 6 000 ≤ 7 100	> 15 240 ≤ 18 034	190	—	45	60


Drive Calculation

Minimum Allowance x/y for Adjusting Drive Centre Distance a_{nom}



Table 24: Optibelt VB classical V-belts

Datum length (mm)	Minimum allowance x (mm) – for tensioning	Minimun allowance y (mm) – for fitting										
		5	Y/6	8	Z/10, ZX/X10	A/13, AX/X13	B/17, BX/X17	20	C/22, CX/X22	25	D/32	E/40
≤ 200	5	10	—	—	—	—	—	—	—	—	—	—
> 200 ≤ 250	5	10	10	—	—	—	—	—	—	—	—	—
> 250 ≤ 315	5	10	10	10	10	—	—	—	—	—	—	—
> 315 ≤ 670	10	—	—	10	10	10	10	—	—	—	—	—
> 670 ≤ 1000	15	—	—	10	15	15	15	—	—	—	—	—
> 1000 ≤ 1250	20	—	—	15	15	15	15	20	20	—	—	—
> 1250 ≤ 1800	25	—	—	15	20	20	20	20	25	25	—	—
> 1800 ≤ 2240	25	—	—	20	20	20	20	25	25	30	35	—
> 2240 ≤ 3000	35	—	—	—	20	20	20	25	30	30	35	40
> 3000 ≤ 4000	45	—	—	—	20	20	20	25	30	30	35	40
> 4000 ≤ 5000	55	—	—	—	20	20	20	30	30	30	35	40
> 5000 ≤ 6300	70	—	—	—	—	20	25	35	35	35	40	45
> 6300 ≤ 8000	85	—	—	—	—	20	25	40	40	40	45	50
> 8000 ≤ 10000	110	—	—	—	—	25	25	40	45	45	45	50
> 10000 ≤ 12500	135	—	—	—	—	—	30	40	45	45	50	55
> 12500 ≤ 15000	150	—	—	—	—	—	40	50	55	55	60	65
> 15000 ≤ 18000	190	—	—	—	—	—	40	50	55	55	60	65

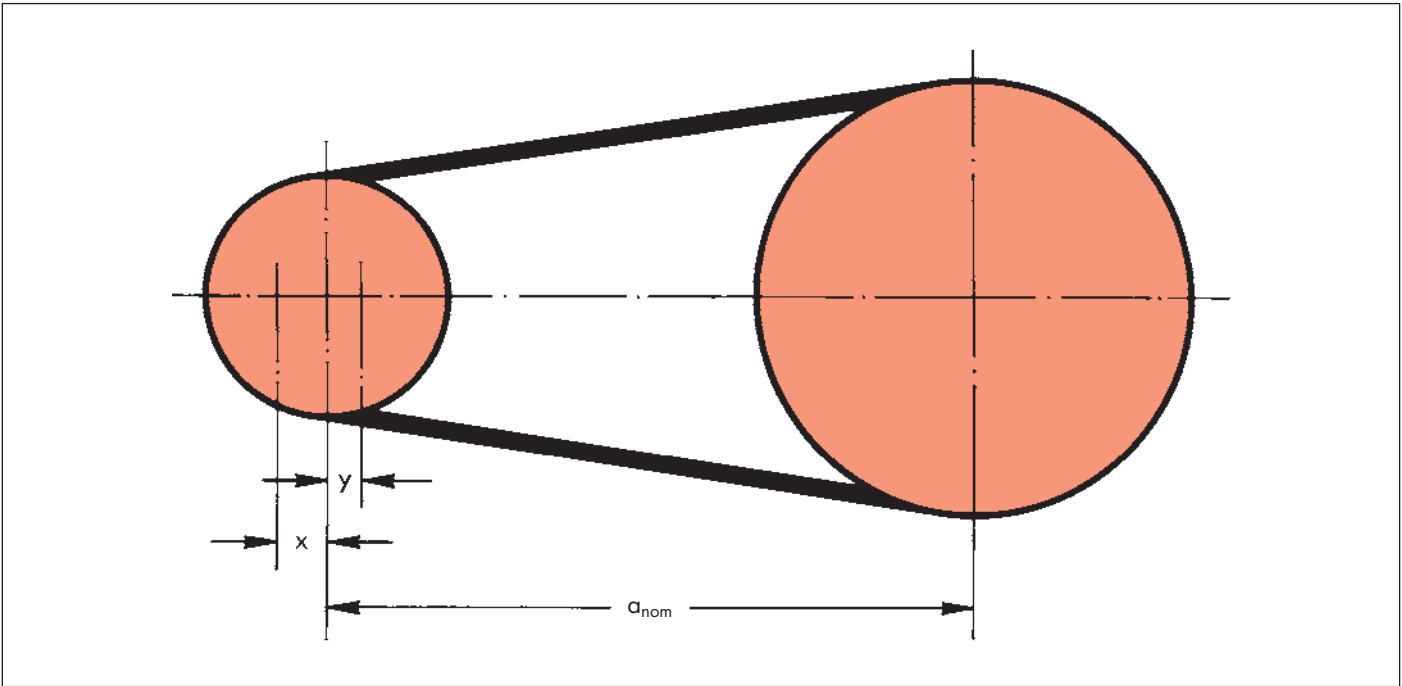

Drive Calculation

Minimum Allowance x/y for Adjusting Drive Centre Distance a_{nom}



Table 25: Optibelt KB Kraftbands with wedge belts

Length designation	Outside length (mm)	Minimum allowance x (mm) – for tensioning	Minimum allowance y (mm) – for fitting			
			SPZ, 3V/9J	SPA, SPB, 5V/15J	8V/25J	SPC
475 ≤ 710	1 206 ≤ 1 803	25	35	40	—	—
> 710 ≤ 850	> 1 803 ≤ 2 159	25	35	40	—	—
> 850 ≤ 1 180	> 2 159 ≤ 2 997	35	35	40	80	—
> 1 180 ≤ 1 600	> 2 997 ≤ 4 064	45	35	40	80	80
> 1 600 ≤ 2 000	> 4 064 ≤ 5 080	55	40	45	85	85
> 2 000 ≤ 2 500	> 5 080 ≤ 6 350	70	45	50	85	85
> 2 500 ≤ 3 150	> 6 350 ≤ 8 001	85	50	55	95	95
> 3 150 ≤ 4 000	> 8 001 ≤ 10 160	110	50	55	95	95
> 4 000 ≤ 5 000	> 10 160 ≤ 12 700	135	—	60	95	95
> 5 000 ≤ 6 000	> 12 700 ≤ 15 240	150	—	70	105	105
> 6 000 ≤ 7 100	> 15 240 ≤ 18 034	190	—	85	120	120

Note: Datum lengths must be considered for kraftbands with sections SPZ, SPA, SPB and SPC.
For raw edge kraftbands, the same x/y values apply.

Table 26: Optibelt KB Kraftbands with classical V-belts


Lengths (mm)	Minimum allowance x (mm) – for tensioning	Minimum allowance y (mm) – for fitting			
		A/HA	B/HB	C/HC	D/HD
1 200 ≤ 1 800	25	30	35	—	—
> 1 800 ≤ 2 240	25	30	35	—	—
> 2 240 ≤ 3 000	35	30	35	50	85
> 3 000 ≤ 4 000	45	30	35	50	85
> 4 000 ≤ 5 000	55	30	40	55	90
> 5 000 ≤ 6 300	70	35	45	60	90
> 6 300 ≤ 8 000	85	45	55	65	100
> 8 000 ≤ 10 000	110	45	55	65	100
> 10 000 ≤ 12 500	135	50	60	75	100
> 12 500 ≤ 15 000	150	60	70	85	110
> 15 000 ≤ 18 000	190	70	85	95	125

Drive Calculation

Formulae and Calculation Examples



Prime mover

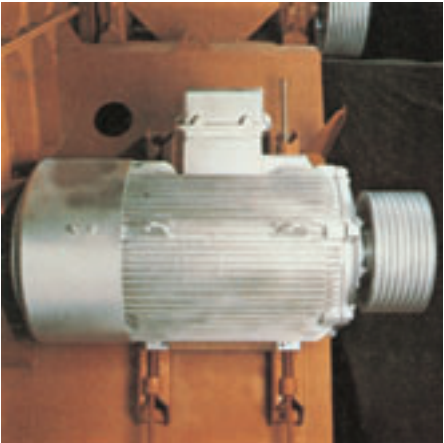

3-phase motor
 $P = 132 \text{ kW}$
 $n_1 = 1485 \text{ rpm}$
Star delta start
Starting torque $M_A = 0.65 M_N$

Operating conditions



Daily operation: approx. 18 hours
Number of starts: one per day
Operating conditions:
normal room temperature, no exposure to oil, water or dust
Drive centre distance:
between 1300 and 1500, variable
Pulley diameter: $d_{d1} \leq 300 \text{ mm}$

Driven machine



Fan
 $P = 132 \text{ kW}$
 $n_2 = 825 \pm 15 \text{ rpm}$
Start-up: under load
Type of loading: continuous

Note: The calculation takes into consideration the standard specified by ISO for datum diameter d_d (supersedes pitch diameter d_w) and datum length L_d (supersedes pitch length L_w).

Formulae

Service factor

c_2 from table 18 page 69

Design Power

$$P_B = P \cdot c_2$$

Selection of belt section

from diagram 2 page 74

Speed ratio

$$i = \frac{n_1}{n_2} = \frac{d_{d2}}{d_{d1}}$$

Datum diameters of the pulleys

d_{d1} selected from table 10 page 43

$$d_{d2} = d_{d1} \cdot i$$

$$d_{d1} = \frac{d_{d2}}{i}$$

Calculation example

$$c_2 = 1.3$$

$$P_B = 132 \cdot 1.3 = 171.6 \text{ kW}$$

SPB

$$i = \frac{1485}{825} = 1.8$$

$d_{d1} = 280 \text{ mm}$ selected

$$d_{d2} = 280 \text{ mm} \cdot 1.8 = 504$$

$d_{d2} = 500 \text{ mm}$ selected from table 10 page 43

Drive Calculation

Formulae and Calculation Examples



Formulae

Recalculation of the speed of the driven unit

$$i_{\text{vorh}} = \frac{d_{d2}}{d_{d1}}$$

$$n_{2 \text{ vorh}} = \frac{n_1}{i_{\text{vorh}}}$$

Drive centre distance (preliminary choice)

recommended:

$$a > 0.7 \quad (d_{dg} + d_{dk})$$

$$a < 2 \quad (d_{dg} + d_{dk})$$

Belt datum length

$$L_{dth} \approx 2 a + 1.57 (d_{dg} + d_{dk}) + \frac{(d_{dg} - d_{dk})^2}{4 a}$$

actual:

$$L_{dth} = 2 a \cdot \sin \frac{\beta}{2} + \frac{\pi}{2} (d_{dg} + d_{dk}) + \frac{\alpha \cdot \pi}{180^\circ} (d_{dg} - d_{dk})$$

Drive centre distance (actual)

calculated from L_{dSt} and L_{dth}

$$(\text{if } L_{dSt} > L_{dth}) \quad a_{\text{nom}} \approx a + \frac{L_{dSt} - L_{dth}}{2}$$

$$(\text{if } L_{dSt} < L_{dth}) \quad a_{\text{nom}} \approx a - \frac{L_{dth} - L_{dSt}}{2}$$

actual:

$$a_{\text{nom}} = \frac{L_{dSt} - \frac{\pi}{2} (d_{dg} + d_{dk})}{4}$$

$$\sqrt{\left[\frac{L_{dSt} - \frac{\pi}{2} (d_{dg} + d_{dk})}{4} \right]^2 - \frac{(d_{dg} - d_{dk})^2}{8}}$$

Minimum allowance x/y for adjusting drive centre distance a_{nom}

x/y from table 22 page 76

Belt speed and flex rate

$$v = \frac{d_{dk} \cdot n_k}{19100} \quad (v_{\text{max}} \approx 55 \text{ m/s})$$

$$f_b = \frac{2 \cdot 1000 \cdot v}{L_{dSt}} \quad (f_{B \text{ max}} \approx 100 \text{ s}^{-1})$$

Calculation example

$$i_{\text{vorh}} = \frac{500}{280} = \mathbf{1.79}$$

$$n_{2 \text{ vorh}} = \frac{1485}{1.79} = \mathbf{830 \text{ min}^{-1}}$$

required:
825 ± 15 rpm
(requirement met)

$$a = \mathbf{1400 \text{ mm}}$$
 selected

$$L_{dth} \approx 2 \cdot 1400 + 1.57 \cdot 780 + \frac{220^2}{4 \cdot 1400} \approx 4033 \text{ mm}$$

next standard length selected from page 19

$$L_{dSt} = \mathbf{4000 \text{ mm}}$$

$$a_{\text{nom}} \approx 1400 - \frac{4033 - 4000}{2} \approx \mathbf{1383.5 \text{ mm}}$$

$$x \geq \mathbf{45 \text{ mm}} \quad / \quad y \geq \mathbf{20 \text{ mm}}$$

Speed and flex rate of the belt

$$v = \frac{280 \cdot 1485}{19100} = \mathbf{21.76 \text{ m/s}}$$

$$f_b = \frac{2 \cdot 1000 \cdot 21.76}{4000} = \mathbf{10.88 \text{ s}^{-1}}$$

Drive Calculation

Formulae and Calculation Examples



Formulae

Arc of contact and correction factor

$$\frac{d_{dg} - d_{dk}}{a_{nom}}$$

β° approximate and c_1 from table 17 page 68

$$\text{actual: } \cos \frac{\beta}{2} = \frac{d_{dg} - d_{dk}}{2 a_{nom}}$$

Length factor

c_3 from table 19 page 70

Nominal power per belt

$$P_N \text{ for } \begin{cases} d_{dk} = 280 \text{ mm} \\ i = 1.79 \\ n_k = 1485 \text{ min}^{-1} \end{cases} \quad \begin{matrix} \text{section SPB} \\ \text{from table 29, page 85} \end{matrix}$$

Number of belts

$$z = \frac{P \cdot c_2}{P_N \cdot c_1 \cdot c_3}$$

Section SPB:

Minimum static tension per belt

(multiply "T" by 1.3 at initial installation)

$$T \approx \frac{500 \cdot (2.02 - c_1) \cdot P_B}{c_1 \cdot z \cdot v} + k \cdot v^2$$

k from diagram 8 page 124

Minimum static shaft loading

(multiply by a factor of 1.3 at initial installation)

$$S_a \approx 2 T \cdot \sin \frac{\beta}{2} \cdot z$$

Belt deflection

$$E_a \approx \frac{E \cdot L}{100}$$

E from diagram 8 page 124

$$L = a_{nom} \cdot \sin \frac{\beta}{2}$$

Calculation example

$$\frac{500 - 280}{1383.5} = 0.16$$

$$\left. \begin{matrix} \beta \approx 170^\circ \\ c_1 = 1.0 \end{matrix} \right\} \text{linearly interpolated}$$

$$c_3 = 1.02$$

$$P_N = 20.63 + 1.24 = 21.87 \text{ kW}$$

$$z = \frac{132 \cdot 1.3}{21.87 \cdot 1.0 \cdot 1.02} = 7.69$$

Suggested:
8 Optibelt SK wedge belts SPB 4000 L_d S=C plus

$$T \approx \frac{500 \cdot (2.02 - 1.0) \cdot 171.6}{1.0 \cdot 8 \cdot 21.76} + 0.19 \cdot 473.5 \approx 593 \text{ N}$$

$$\begin{matrix} \text{initial installation:} \\ T = 593 \text{ N} \cdot 1.3 = 771 \text{ N} \end{matrix}$$

$$S_a \approx 2 \cdot 593 \cdot 0.9962 \cdot 8 \approx 9452 \text{ N}$$

$$\begin{matrix} \text{initial installation:} \\ S_a = 9452 \text{ N} \cdot 1.3 = 12288 \text{ N} \end{matrix}$$

$$E_a \approx \frac{2.7 \cdot 1378}{100} \approx 37 \text{ mm}$$

$$E \approx 2.7 \text{ mm}$$

$$L = 1383.5 \cdot 0.9962 \cdot 1378 \text{ mm}$$

Drive Calculation

optibelt CAP – Example



- The drive requires:
- 8 pce(s) Optibelt SK wedge belt SPC 6300 L_d S=C plus
 - Optibelt KS pulley bored for taper bush TB SPC 400-8
 - Optibelt TB taper bush 4545 (Bore diameter 55-110 mm)
 - Optibelt KS pulley bored for taper bush TB SPC 800-8
 - Optibelt TB taper bush 5050 (Bore diameter 70-125 mm)

			Deviation/Hints
Type of driver unit	:	Electric motor	
Type of driven unit	:	Mill (hammer)	
Calculation power	PB:	416.00 kW	
Drive power	P:	260.00 kW	
Torque at driver pulley	M:	1399 Nm	
Driver speed	n ₁ :	1775 1/min	
Required driven speed	n ₂ :	888 1/min	-1 1/min
Datum diameter pulley 1	d _{d1} :	400.00 mm	
Datum diameter pulley 2	d _{d2} :	800.00 mm	
Datum length	L _d :	6300 mm	
Actual centres	a:	2198.40 mm	***** mm
Actual drive ratio	i:	2.00	0.0 %
Adjustment required for belt fitting	y:	35.00 mm	
Adjustment required for belt tensioning	x:	70.00 mm	
Actual service factor	c ₂ :	1.61	
Belt speed	v:	37.17 m/s	Dynamic balancing required!
Flex rate	f _B :	11.80 1/s	
Power per belt	P _N :	51.84 kW	
Arc of contact factor	c ₁ :	0.99	
Belt length factor	c ₃ :	1.02	
Arc of contact on small pulley	β:	169.60 °	
Pulley face width	b ₂ :	212.50 mm	
Span length	l:	2189.30 mm	
Calculated number of belts	z ₁ :	7.93	proposed c ₂ = 1.60
Weight of drive		276.87 kg	
Statistic shaft load, initial installation	Sast:	25519 N	
Statistic shaft load (retensioning)	Samin:	19630 N	
Dynamic shaft load	Sadyn:	11752 N	

Tensioning recommendations		Initial installation	Re-tension
proposed c ₂ = 1.60		new belts	existing belts
1. OPTIKRIK II + III	Static tension per belt:	1602 N	1232 N
2. Load/deflection tension gauge	Load at centre of span:	125 N	125 N
	Deflection:	41 mm	51 mm
3. Length additional value per 1000 mm belt length	:	6.3 mm	4.3 mm
4. Optibelt TT 3/TT mini Tension Tester	Frequency:	14.9 1/s	12.6 1/s

Power Ratings

optibelt 5K section SPZ, 3V/9N, 3V/9J

Nominal Power Rating P_N (kW) for β = 180° and L_d = 1600 mm



Table 27

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)																Additional power (kW) per belt for speed ratio i			
			63	71	80	85	90	95	100	112	125	132	140	150	160	180	200	1.01 to 1.57				
																		1.01 to 1.05	1.06 to 1.26	1.27 to 1.57		
Statically balanced	5	700	0.50	0.68	0.88	1.00	1.11	1.22	1.33	1.60	1.88	2.03	2.20	2.42	2.63	3.05	3.47	0.01	0.06	0.09	0.11	
		950	0.63	0.87	1.14	1.29	1.44	1.59	1.74	2.08	2.46	2.66	2.89	3.17	3.45	4.00	4.54	0.01	0.09	0.12	0.15	
		1450	0.87	1.23	1.62	1.84	2.06	2.27	2.49	3.00	3.54	3.83	4.16	4.56	4.96	5.75	6.51	0.02	0.13	0.19	0.23	
		2850	1.38	2.03	2.74	3.13	3.52	3.90	4.27	5.15	6.07	6.55	7.08	7.72	8.34	9.50	10.55	0.04	0.26	0.37	0.46	
		100	0.10	0.13	0.16	0.18	0.20	0.22	0.24	0.28	0.33	0.35	0.38	0.42	0.45	0.52	0.59	0.00	0.01	0.01	0.02	
		200	0.18	0.24	0.30	0.34	0.37	0.41	0.44	0.52	0.61	0.66	0.71	0.78	0.85	0.98	1.12	0.00	0.02	0.03	0.03	
		300	0.25	0.33	0.43	0.48	0.53	0.58	0.63	0.75	0.88	0.95	1.03	1.13	1.23	1.42	1.62	0.00	0.03	0.04	0.05	
		400	0.32	0.43	0.55	0.62	0.68	0.75	0.81	0.97	1.14	1.23	1.34	1.47	1.59	1.85	2.10	0.01	0.04	0.05	0.06	
		500	0.38	0.51	0.66	0.75	0.83	0.91	0.99	1.19	1.39	1.51	1.63	1.79	1.95	2.26	2.57	0.01	0.05	0.07	0.08	
		600	0.44	0.60	0.78	0.87	0.97	1.07	1.16	1.39	1.64	1.77	1.92	2.11	2.29	2.66	3.02	0.01	0.06	0.08	0.10	
		700	0.50	0.68	0.88	1.00	1.11	1.22	1.33	1.60	1.88	2.03	2.20	2.42	2.63	3.05	3.47	0.01	0.06	0.09	0.11	
		800	0.55	0.76	0.99	1.12	1.24	1.37	1.50	1.79	2.12	2.29	2.48	2.72	2.96	3.44	3.91	0.01	0.07	0.11	0.13	
		900	0.61	0.84	1.09	1.24	1.38	1.52	1.66	1.99	2.35	2.54	2.75	3.02	3.29	3.81	4.33	0.01	0.08	0.12	0.15	
		1000	0.66	0.91	1.19	1.35	1.51	1.66	1.81	2.18	2.57	2.78	3.02	3.31	3.61	4.18	4.75	0.01	0.09	0.13	0.16	
		1100	0.71	0.98	1.29	1.46	1.63	1.80	1.97	2.37	2.79	3.02	3.28	3.60	3.92	4.54	5.16	0.02	0.10	0.14	0.18	
		1200	0.76	1.06	1.39	1.57	1.76	1.94	2.12	2.55	3.01	3.26	3.54	3.88	4.22	4.90	5.56	0.02	0.11	0.16	0.19	
		1300	0.80	1.12	1.48	1.68	1.88	2.07	2.27	2.73	3.23	3.49	3.79	4.16	4.52	5.24	5.95	0.02	0.12	0.17	0.21	
		1400	0.85	1.19	1.58	1.79	2.00	2.21	2.42	2.91	3.44	3.72	4.04	4.43	4.82	5.58	6.32	0.02	0.13	0.18	0.23	
		1500	0.89	1.26	1.67	1.89	2.12	2.34	2.56	3.08	3.64	3.94	4.28	4.69	5.11	5.91	6.69	0.02	0.14	0.20	0.24	
		10	1600	0.93	1.32	1.76	2.00	2.23	2.47	2.70	3.26	3.85	4.16	4.52	4.95	5.39	6.23	7.05	0.02	0.15	0.21	0.26
			1700	0.98	1.39	1.85	2.10	2.35	2.59	2.84	3.42	4.05	4.38	4.75	5.21	5.66	6.55	7.40	0.02	0.16	0.22	0.27
			1800	1.02	1.45	1.93	2.20	2.46	2.72	2.98	3.59	4.24	4.59	4.98	5.46	5.93	6.85	7.74	0.03	0.17	0.24	0.29
			1900	1.06	1.51	2.02	2.29	2.57	2.84	3.11	3.75	4.43	4.80	5.20	5.70	6.19	7.15	8.07	0.03	0.18	0.25	0.31
			2000	1.10	1.57	2.10	2.39	2.68	2.96	3.24	3.91	4.62	5.00	5.42	5.94	6.45	7.44	8.38	0.03	0.19	0.26	0.32
			2100	1.13	1.63	2.18	2.48	2.78	3.08	3.37	4.07	4.81	5.20	5.64	6.17	6.70	7.72	8.68	0.03	0.19	0.28	0.34
			2200	1.17	1.69	2.26	2.58	2.89	3.20	3.50	4.22	4.99	5.39	5.84	6.40	6.94	7.99	8.98	0.03	0.20	0.29	0.35
			2300	1.20	1.74	2.34	2.67	2.99	3.31	3.63	4.38	5.17	5.58	6.05	6.62	7.18	8.25	9.26	0.03	0.21	0.30	0.37
			2400	1.24	1.80	2.42	2.75	3.09	3.42	3.75	4.52	5.34	5.77	6.25	6.84	7.41	8.50	9.52	0.03	0.22	0.32	0.39
			2500	1.27	1.85	2.49	2.84	3.19	3.53	3.87	4.67	5.51	5.95	6.44	7.04	7.63	8.74	9.77	0.04	0.23	0.33	0.40
		15	2600	1.31	1.90	2.57	2.93	3.28	3.64	3.99	4.81	5.67	6.12	6.63	7.25	7.84	8.97	10.01	0.04	0.24	0.34	0.42
			2700	1.34	1.96	2.64	3.01	3.38	3.74	4.10	4.95	5.83	6.30	6.81	7.44	8.05	9.19	10.24	0.04	0.25	0.35	0.44
			2800	1.37	2.01	2.71	3.09	3.47	3.85	4.22	5.08	5.99	6.46	6.99	7.63	8.25	9.40	10.45	0.04	0.26	0.37	0.45
			2900	1.40	2.05	2.78	3.17	3.56	3.95	4.33	5.22	6.14	6.63	7.16	7.81	8.44	9.60	10.64	0.04	0.27	0.38	0.47
			3000	1.43	2.10	2.85	3.25	3.65	4.05	4.43	5.34	6.29	6.78	7.33	7.99	8.62	9.79	10.82	0.04	0.28	0.39	0.48
	3100		1.45	2.15	2.91	3.33	3.74	4.14	4.54	5.47	6.43	6.93	7.49	8.16	8.79	9.96	10.99	0.04	0.29	0.41	0.50	
	3200		1.48	2.19	2.98	3.40	3.82	4.24	4.64	5.59	6.57	7.08	7.64	8.32	8.95	10.12	11.14	0.05	0.30	0.42	0.52	
	3300		1.51	2.24	3.04	3.48	3.91	4.33	4.74	5.71	6.71	7.22	7.79	8.47	9.11	10.28	11.27	0.05	0.31	0.43	0.53	
	3400		1.53	2.28	3.10	3.55	3.99	4.42	4.84	5.83	6.84	7.36	7.93	8.61	9.26	10.41	11.39	0.05	0.31	0.45	0.55	
	3500		1.56	2.32	3.16	3.62	4.06	4.50	4.94	5.94	6.96	7.49	8.07	8.75	9.39	10.54	11.48	0.05	0.32	0.46	0.56	
	20	3600	1.58	2.36	3.22	3.68	4.14	4.59	5.03	6.04	7.08	7.61	8.20	8.88	9.52	10.65	11.56	0.05	0.33	0.47	0.58	
		3700	1.60	2.40	3.28	3.75	4.22	4.67	5.12	6.15	7.20	7.73	8.32	9.00	9.64	10.75	11.62	0.05	0.34	0.49	0.60	
		3800	1.62	2.44	3.33	3.81	4.29	4.75	5.20	6.25	7.31	7.85	8.43	9.12	9.75	10.83	11.67	0.05	0.35	0.50	0.61	
		3900	1.64	2.48	3.39	3.88	4.36	4.83	5.29	6.35	7.41	7.95	8.54	9.22	9.85	10.90	11.69	0.06	0.36	0.51	0.63	
		4000	1.66	2.51	3.44	3.94	4.43	4.90	5.37	6.44	7.51	8.06	8.64	9.32	9.93	10.96	11.70	0.06	0.37	0.53	0.64	
		4100	1.68	2.55	3.49	4.00	4.49	4.97	5.45	6.53	7.61	8.15	8.73	9.41	10.01	11.00	11.68	0.06	0.38	0.54	0.66	
		4200	1.70	2.58	3.54	4.05	4.55	5.04	5.52	6.61	7.70	8.24	8.82	9.48	10.08	11.03	11.64	0.06	0.39	0.55	0.68	
		4300	1.72	2.61	3.58	4.11	4.62	5.11	5.59	6.69	7.78	8.32	8.90	9.55	10.13	11.04	11.59	0.06	0.40	0.57	0.69	
		4400	1.73	2.64	3.63	4.16	4.67	5.18	5.66	6.77	7.86	8.40	8.97	9.61	10.17	11.03	11.51	0.06	0.41	0.58	0.71	
		4500	1.75	2.67	3.67	4.21	4.73	5.24	5.73	6.84	7.93	8.47	9.03	9.66	10.21	11.01	11.41	0.06	0.42	0.59	0.73	
	25	4600	1.76	2.70	3.71	4.26	4.78	5.30	5.79	6.91	8.00	8.53	9.09	9.70	10.23	10.97		0.07	0.43	0.60	0.74	
		4700	1.77	2.73	3.75	4.30	4.84	5.35	5.85	6.97	8.06	8.59	9.13	9.73	10.24	10.92		0.07	0.44	0.62	0.76	
		4800	1.78	2.75	3.79	4.35	4.88	5.40	5.91	7.03	8.11	8.63	9.17	9.76	10.23	10.85		0.07	0.44	0.63	0.77	
		4900	1.80	2.78	3.83	4.39	4.93	5.45	5.96	7.08	8.16	8.68	9.20	9.77	10.22	10.76		0.07	0.45	0.64	0.79	
		5000	1.81	2.80	3.86	4.43	4.97	5.50	6.01	7.13	8.20	8.71	9.22	9.77	10.19	10.65		0.07	0.46	0.66	0.81	
		5100	1.81	2.82	3.89	4.47	5.02	5.55	6.05	7.18	8.24	8.74	9.24	9.75	10.15			0.07	0.47	0.67	0.82	
		5200	1.82	2.84	3.93	4.50	5.05	5.59	6.10	7.22	8.27	8.76	9.24	9.73	10.09			0.07	0.48	0.68	0.84	
		5300	1.83	2.86	3.95	4.53	5.09	5.63	6.14	7.26	8.29	8.77	9.23	9.70	10.03			0.08	0.49	0.70	0.85	
		5400	1.83	2.87	3.98	4.56	5.12	5.66	6.17	7.29	8.31	8.77	9.22	9.66	9.95			0.08	0.50	0.71	0.87	
5500		1.84	2.89	4.01	4.59	5.16	5.69	6.20	7.31	8.32	8.77	9.20	9.60				0.08	0.51	0.72	0.89		
3																						

Power Ratings

optibelt 5K section SPA

Nominal Power Rating P_N (kW) for $\beta = 180^\circ$ and $L_d = 2500$ mm



Table 28

Pulleys	v (m/s)	n_k (min ⁻¹)	Datum diameter of small pulley d_{dk} (mm)															Additional power (kW) per belt for speed ratio i				
			90	100	112	118	125	132	140	150	160	180	200	224	250	280	315	1.01	1.06	1.27	> 1.57	
																		to 1.05	to 1.26	to 1.57		
Statically balanced	5	700	1.17	1.55	1.99	2.21	2.47	2.72	3.01	3.37	3.73	4.44	5.14	5.97	6.85	7.86	9.01	0.02	0.15	0.21	0.26	
		950	1.49	1.98	2.57	2.86	3.20	3.53	3.91	4.39	4.86	5.78	6.70	7.78	8.92	10.21	11.68	0.03	0.20	0.29	0.36	
		1450	2.04	2.76	3.62	4.04	4.53	5.02	5.57	6.25	6.92	8.24	9.52	11.02	12.58	14.30	16.18	0.05	0.31	0.44	0.54	
		2850	3.14	4.40	5.88	6.60	7.43	8.23	9.13	10.21	11.25	13.21	14.97	16.81	18.43	19.78	20.57	0.09	0.61	0.87	1.07	
		100	0.23	0.30	0.37	0.40	0.45	0.49	0.54	0.60	0.65	0.77	0.89	1.03	1.18	1.35	1.55	0.00	0.02	0.03	0.04	
		200	0.42	0.54	0.68	0.75	0.83	0.91	1.00	1.11	1.22	1.45	1.67	1.94	2.22	2.55	2.92	0.01	0.04	0.06	0.07	
		300	0.59	0.76	0.96	1.07	1.18	1.30	1.43	1.60	1.76	2.09	2.41	2.80	3.21	3.68	4.23	0.01	0.06	0.09	0.11	
		400	0.75	0.97	1.24	1.37	1.52	1.67	1.85	2.06	2.28	2.70	3.12	3.63	4.16	4.78	5.49	0.01	0.09	0.12	0.15	
		500	0.90	1.17	1.50	1.66	1.85	2.03	2.25	2.51	2.77	3.30	3.81	4.43	5.09	5.84	6.70	0.02	0.11	0.15	0.19	
		600	1.04	1.36	1.75	1.94	2.16	2.38	2.63	2.95	3.26	3.87	4.48	5.21	5.98	6.86	7.88	0.02	0.13	0.18	0.22	
		700	1.17	1.55	1.99	2.21	2.47	2.72	3.01	3.37	3.73	4.44	5.14	5.97	6.85	7.86	9.01	0.02	0.15	0.21	0.26	
		800	1.30	1.72	2.23	2.47	2.76	3.05	3.38	3.78	4.19	4.99	5.77	6.71	7.70	8.82	10.11	0.03	0.17	0.24	0.30	
		900	1.43	1.90	2.45	2.73	3.05	3.37	3.74	4.19	4.64	5.52	6.39	7.43	8.52	9.76	11.17	0.03	0.19	0.27	0.34	
		1000	1.55	2.06	2.68	2.98	3.34	3.69	4.09	4.58	5.07	6.04	7.00	8.12	9.32	10.66	12.18	0.03	0.22	0.31	0.37	
			1100	1.66	2.23	2.90	3.23	3.61	4.00	4.43	4.97	5.50	6.55	7.59	8.80	10.09	11.53	13.15	0.04	0.24	0.34	0.41
			1200	1.77	2.38	3.11	3.47	3.88	4.30	4.76	5.34	5.92	7.05	8.16	9.46	10.84	12.37	14.08	0.04	0.26	0.37	0.45
			1300	1.88	2.54	3.31	3.70	4.15	4.59	5.09	5.71	6.33	7.54	8.72	10.10	11.55	13.17	14.96	0.04	0.28	0.40	0.49
			1400	1.99	2.69	3.52	3.93	4.40	4.87	5.41	6.07	6.72	8.01	9.26	10.72	12.25	13.93	15.79	0.05	0.30	0.43	0.52
			1500	2.09	2.83	3.71	4.15	4.65	5.15	5.72	6.42	7.11	8.47	9.79	11.32	12.91	14.66	16.56	0.05	0.32	0.46	0.56
			1600	2.19	2.97	3.91	4.37	4.90	5.43	6.02	6.76	7.49	8.91	10.29	11.89	13.54	15.34	17.29	0.05	0.34	0.49	0.60
			1700	2.28	3.11	4.09	4.58	5.14	5.69	6.32	7.09	7.86	9.34	10.78	12.44	14.14	15.99	17.95	0.06	0.37	0.52	0.64
			1800	2.37	3.24	4.27	4.78	5.37	5.95	6.61	7.42	8.21	9.76	11.25	12.97	14.71	16.59	18.56	0.06	0.39	0.55	0.67
			1900	2.46	3.37	4.45	4.98	5.60	6.20	6.89	7.73	8.56	10.17	11.71	13.47	15.25	17.14	19.10	0.06	0.41	0.58	0.71
			2000	2.54	3.50	4.62	5.18	5.82	6.45	7.16	8.03	8.89	10.55	12.14	13.94	15.75	17.65	19.57	0.07	0.43	0.61	0.75
			2100	2.62	3.62	4.79	5.37	6.03	6.69	7.42	8.33	9.22	10.93	12.56	14.39	16.22	18.11	19.98	0.07	0.45	0.64	0.79
			2200	2.70	3.74	4.95	5.55	6.24	6.92	7.68	8.61	9.53	11.29	12.95	14.81	16.65	18.52	20.32	0.07	0.47	0.67	0.82
			2300	2.78	3.85	5.11	5.73	6.44	7.14	7.93	8.89	9.83	11.63	13.32	15.20	17.04	18.87	20.58	0.08	0.50	0.70	0.86
			2400	2.85	3.96	5.26	5.90	6.63	7.36	8.17	9.15	10.12	11.95	13.67	15.57	17.39	19.17	20.77	0.08	0.52	0.73	0.90
			2500	2.92	4.07	5.41	6.07	6.82	7.56	8.39	9.41	10.39	12.26	14.00	15.90	17.70	19.41	20.87	0.08	0.54	0.76	0.94
			2600	2.99	4.17	5.55	6.23	7.00	7.76	8.62	9.65	10.65	12.56	14.31	16.20	17.96	19.60	20.90	0.09	0.56	0.79	0.97
			2700	3.05	4.27	5.69	6.38	7.18	7.96	8.83	9.88	10.90	12.83	14.59	16.47	18.19	19.72	20.83	0.09	0.58	0.82	1.01
			2800	3.11	4.36	5.82	6.53	7.34	8.14	9.03	10.11	11.14	13.09	14.85	16.70	18.36	19.78	20.68	0.09	0.60	0.86	1.05
			2900	3.16	4.45	5.94	6.67	7.50	8.32	9.22	10.32	11.36	13.32	15.08	16.90	18.49	19.77	20.44	0.10	0.62	0.89	1.09
			3000	3.22	4.53	6.06	6.81	7.66	8.49	9.41	10.51	11.57	13.54	15.29	17.07	18.57	19.70		0.10	0.65	0.92	1.12
			3100	3.26	4.61	6.18	6.94	7.80	8.64	9.58	10.70	11.77	13.74	15.47	17.20	18.60			0.10	0.67	0.95	1.16
			3200	3.31	4.69	6.29	7.06	7.94	8.80	9.74	10.87	11.95	13.92	15.62	17.29	18.58			0.11	0.69	0.98	1.20
			3300	3.35	4.76	6.39	7.18	8.07	8.94	9.89	11.03	12.11	14.07	15.75	17.34	18.51			0.11	0.71	1.01	1.24
			3400	3.39	4.83	6.49	7.29	8.19	9.07	10.03	11.18	12.26	14.21	15.84	17.35	18.38			0.11	0.73	1.04	1.27
			3500	3.43	4.89	6.58	7.39	8.31	9.19	10.17	11.32	12.40	14.32	15.91	17.33	18.20			0.12	0.75	1.07	1.31
			3600	3.46	4.95	6.66	7.48	8.41	9.31	10.28	11.44	12.52	14.42	15.95	17.26				0.12	0.77	1.10	1.35
			3700	3.49	5.01	6.74	7.57	8.51	9.41	10.39	11.55	12.62	14.48	15.95	17.15				0.12	0.80	1.13	1.39
			3800	3.51	5.06	6.81	7.65	8.60	9.50	10.49	11.64	12.70	14.53	15.93	16.99				0.13	0.82	1.16	1.42
			3900	3.53	5.10	6.88	7.73	8.68	9.59	10.57	11.72	12.77	14.55	15.87	16.79				0.13	0.84	1.19	1.46
			4000	3.55	5.14	6.94	7.79	8.75	9.66	10.65	11.79	12.82	14.55	15.78	16.54				0.13	0.86	1.22	1.50
			4100	3.57	5.17	6.99	7.85	8.81	9.73	10.71	11.84	12.85	14.52	15.66					0.14	0.88	1.25	1.54
			4200	3.58	5.20	7.04	7.90	8.87	9.78	10.76	11.87	12.87	14.47	15.50					0.14	0.90	1.28	1.57
			4300	3.58	5.23	7.08	7.95	8.91	9.82	10.79	11.89	12.86	14.39	15.30					0.14	0.93	1.31	1.61
			4400	3.58	5.25	7.11	7.98	8.95	9.85	10.81	11.90	12.84	14.28	15.07					0.15	0.95	1.34	1.65
			4500	3.58	5.26	7.13	8.01	8.97	9.87	10.82	11.88	12.80	14.15	14.80					0.15	0.97	1.37	1.69
			4600	3.58	5.27	7.15	8.03	8.99	9.88	10.82	11.86	12.73	13.99						0.15	0.99	1.41	1.72
			4700	3.57	5.27	7.16	8.04	8.99	9.88	10.80	11.81	12.65	13.80						0.16	1.01	1.44	1.76
			4800	3.55	5.27	7.16	8.04	8.99	9.86	10.77	11.75	12.55	13.58						0.16	1.03	1.47	1.80
			4900	3.53	5.26	7.16	8.03	8.97	9.84	10.72	11.67	12.43	13.33						0.16	1.05	1.50	1.84
			5000	3.51	5.25	7.15	8.01	8.95	9.80	10.66	11.57	12.28	13.05						0.17	1.08	1.53	1.87
			5100	3.48	5.23	7.13	7.99	8.91	9.74	10.58	11.45	12.11							0.17	1.10	1.56	1.91
			5200	3.45	5.21	7.10	7.95	8.86	9.68	10.49	11.32	11.92							0.17	1.12	1.59	1.95
			5300	3.42	5.18	7.06	7.91	8.80	9.60	10.39	11.17	11.71							0.18	1.14	1.62	1.99
			5400	3.38	5.14	7.02	7.85	8.73	9.51	10.27	11.00	11.48							0.18	1.16	1.65	2.02
			5500	3.33	5.10	6.96	7.79	8.65	9.41	10.13	10.81	11.22							0.18	1.18	1.68	2.06
			5600	3.28	5.05	6.90	7.71	8.56	9.29	9.97	10.60								0.19	1.21	1.71	2.10
5700	3.23		4.99	6.83	7.63	8.45	9.16	9.80	10.37													

Power Ratings

optibelt 5K section SPB, 5V/15N, 5V/15J

Nominal Power Rating P_N (kW) for β = 180° and L_d = 3550 mm



Table 29

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)																Additional power (kW) per belt for speed ratio i			
			140	150	160	180	190	200	212	224	236	250	280	315	355	375	400	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57	
Statically balanced	5	700	3.46	4.04	4.62	5.77	6.34	6.91	7.59	8.26	8.92	9.70	11.33	13.21	15.30	16.33	17.59	0.05	0.33	0.47	0.58	
		950	4.42	5.19	5.95	7.46	8.20	8.94	9.82	10.69	11.56	12.56	14.66	17.04	19.67	20.94	22.50	0.07	0.45	0.64	0.78	
		1450	6.09	7.20	8.29	10.44	11.49	12.53	13.76	14.96	16.15	17.50	20.30	23.36	26.59	28.08	29.83	0.11	0.69	0.97	1.20	
		2850	9.07	10.83	12.53	15.71	17.18	18.57	20.13	21.57	22.87	24.21	26.40	27.68				0.21	1.35	1.92	2.35	
		100	0.66	0.76	0.85	1.04	1.14	1.23	1.35	1.46	1.57	1.70	1.98	2.30	2.66	2.84	3.07	0.01	0.05	0.07	0.08	
		200	1.21	1.39	1.57	1.94	2.12	2.30	2.51	2.73	2.94	3.19	3.72	4.33	5.02	5.36	5.79	0.01	0.09	0.13	0.16	
		300	1.71	1.97	2.24	2.77	3.03	3.29	3.61	3.92	4.23	4.59	5.36	6.24	7.25	7.74	8.36	0.02	0.14	0.20	0.25	
		400	2.17	2.52	2.87	3.56	3.91	4.25	4.66	5.06	5.47	5.94	6.93	8.08	9.38	10.03	10.82	0.03	0.19	0.27	0.33	
		500	2.62	3.05	3.48	4.32	4.75	5.16	5.66	6.16	6.66	7.23	8.45	9.85	11.43	12.22	13.18	0.04	0.24	0.34	0.41	
		600	3.05	3.55	4.06	5.06	5.56	6.05	6.64	7.23	7.81	8.48	9.92	11.56	13.41	14.32	15.44	0.04	0.28	0.40	0.49	
		700	3.46	4.04	4.62	5.77	6.34	6.91	7.59	8.26	8.92	9.70	11.33	13.21	15.30	16.33	17.59	0.05	0.33	0.47	0.58	
		800	3.85	4.51	5.17	6.46	7.10	7.74	8.50	9.26	10.00	10.87	12.70	14.79	17.11	18.25	19.64	0.06	0.38	0.54	0.66	
		900	4.23	4.96	5.69	7.13	7.84	8.55	9.39	10.22	11.05	12.00	14.02	16.30	18.84	20.07	21.57	0.07	0.43	0.61	0.74	
		1000	4.60	5.40	6.20	7.78	8.56	9.33	10.25	11.16	12.06	13.10	15.28	17.75	20.47	21.79	23.39	0.07	0.47	0.67	0.82	
		1100	4.95	5.83	6.69	8.41	9.25	10.09	11.08	12.06	13.03	14.15	16.50	19.13	22.01	23.40	25.07	0.08	0.52	0.74	0.91	
		1200	5.29	6.24	7.17	9.01	9.92	10.82	11.88	12.93	13.97	15.16	17.65	20.44	23.46	24.89	26.62	0.09	0.57	0.81	0.99	
		1300	5.62	6.63	7.63	9.60	10.57	11.52	12.65	13.77	14.87	16.13	18.76	21.67	24.79	26.26	28.02	0.10	0.62	0.87	1.07	
		1400	5.94	7.01	8.08	10.16	11.19	12.20	13.40	14.57	15.73	17.06	19.80	22.82	26.02	27.51	29.27	0.10	0.66	0.94	1.15	
		1500	6.24	7.38	8.51	10.71	11.79	12.85	14.11	15.34	16.55	17.93	20.78	23.88	27.12	28.62	30.35	0.11	0.71	1.01	1.24	
		1600	6.54	7.73	8.92	11.23	12.36	13.48	14.79	16.07	17.33	18.76	21.69	24.86	28.11	29.58	31.26	0.12	0.76	1.08	1.32	
		1700	6.82	8.07	9.31	11.73	12.91	14.07	15.44	16.77	18.07	19.54	22.54	25.74	28.96	30.39	31.99	0.12	0.81	1.14	1.40	
		1800	7.08	8.40	9.69	12.21	13.44	14.64	16.05	17.42	18.76	20.27	23.31	26.52	29.68	31.04	32.53	0.13	0.85	1.21	1.48	
		1900	7.34	8.71	10.05	12.67	13.93	15.18	16.63	18.04	19.40	20.94	24.02	27.20	30.25	31.53	32.86	0.14	0.90	1.28	1.57	
		2000	7.58	9.00	10.39	13.10	14.41	15.68	17.17	18.61	20.00	21.56	24.64	27.77	30.68	31.84	32.99	0.15	0.95	1.34	1.65	
		2100	7.81	9.28	10.72	13.51	14.85	16.15	17.67	19.14	20.55	22.11	25.19	28.24	30.94	31.96	32.89	0.15	0.99	1.41	1.73	
		2200	8.02	9.54	11.03	13.89	15.26	16.59	18.14	19.62	21.04	22.61	25.65	28.58	31.05	31.90	32.57	0.16	1.04	1.48	1.81	
		2300	8.22	9.79	11.31	14.24	15.64	17.00	18.57	20.06	21.48	23.05	26.03	28.81	30.98	31.63		0.17	1.09	1.55	1.90	
		2400	8.41	10.02	11.58	14.57	16.00	17.37	18.95	20.45	21.87	23.41	26.31	28.91	30.74	31.16		0.18	1.14	1.61	1.98	
		2500	8.58	10.23	11.83	14.88	16.32	17.70	19.29	20.79	22.20	23.72	26.50	28.88	30.31			0.18	1.18	1.68	2.06	
		2600	8.74	10.42	12.06	15.15	16.61	18.00	19.59	21.08	22.47	23.95	26.60	28.71				0.19	1.23	1.75	2.14	
		2700	8.88	10.60	12.26	15.39	16.86	18.26	19.84	21.31	22.67	24.11	26.60	28.41				0.20	1.28	1.82	2.23	
		2800	9.01	10.76	12.45	15.61	17.08	18.48	20.05	21.50	22.82	24.19	26.49	27.96				0.21	1.33	1.88	2.31	
		2900	9.12	10.90	12.61	15.79	17.27	18.66	20.20	21.62	22.90	24.20	26.28	27.36				0.21	1.37	1.95	2.39	
		3000	9.22	11.02	12.75	15.95	17.42	18.79	20.31	21.69	22.91	24.13	25.96					0.22	1.42	2.02	2.47	
		3100	9.30	11.12	12.86	16.07	17.53	18.88	20.37	21.70	22.85	23.98						0.23	1.47	2.08	2.56	
		3200	9.36	11.21	12.96	16.16	17.60	18.93	20.38	21.64	22.72	23.74						0.23	1.52	2.15	2.64	
		3300	9.41	11.27	13.02	16.21	17.63	18.93	20.33	21.53	22.52	23.42						0.24	1.56	2.22	2.72	
		3400	9.44	11.31	13.07	16.23	17.63	18.89	20.22	21.35	22.25	23.01						0.25	1.61	2.29	2.80	
		3500	9.45	11.33	13.08	16.22	17.58	18.80	20.06	21.10	21.90	22.51						0.26	1.66	2.35	2.89	
		3600	9.45	11.33	13.08	16.17	17.49	18.66	19.84	20.78								0.26	1.71	2.42	2.97	
		3700	9.42	11.30	13.04	16.08	17.36	18.47	19.57	20.40								0.27	1.75	2.49	3.05	
		3800	9.38	11.25	12.98	15.95	17.18	18.22	19.23	19.94								0.28	1.80	2.55	3.13	
		3900	9.31	11.18	12.89	15.78	16.95	17.93	18.83	19.41								0.29	1.85	2.62	3.21	
		4000	9.23	11.09	12.77	15.58	16.68	17.58	18.36	18.81								0.29	1.89	2.69	3.30	
		4100	9.13	10.97	12.62	15.33	16.36	17.17										0.30	1.94	2.76	3.38	
		4200	9.01	10.82	12.44	15.04	16.00	16.71										0.31	1.99	2.82	3.46	
		4300	8.86	10.65	12.23	14.71	15.58	16.19										0.32	2.04	2.89	3.54	
		4400	8.70	10.46	11.99	14.33	15.11	15.62										0.32	2.08	2.96	3.63	
		4500	8.51	10.24	11.72	13.92	14.60	14.98										0.33	2.13	3.03	3.71	
		4600	8.30	9.99	11.42	13.45												0.34	2.18	3.09	3.79	
		4700	8.07	9.72	11.08	12.94												0.34	2.23	3.16	3.87	
		4800	7.82	9.41	10.72	12.38												0.35	2.27	3.23	3.96	
		4900	7.54	9.08	10.31	11.78												0.36	2.32	3.29	4.04	
		5000	7.24	8.72	9.87	11.13												0.37	2.37	3.36	4.12	
		5100	6.92	8.33	9.40													0.37	2.42	3.43	4.20	
		5200	6.57	7.91	8.89													0.38	2.46	3.50	4.29	
		5300	6.19	7.46	8.34													0.39	2.51	3.56	4.37	
		5400	5.79	6.98	7.76													0.40	2.56	3.63	4.45	
		5500	5.37	6.47	7.14													0.40	2.61	3.70	4.53	
Dynamically balanced (for details see DIN 2211)																			v (m/s)			
Where v > 42 m/s, please consult our Applications Engineering Department																			Pulleys			

Note: Pulley diameters shown are outside diameters for sections 5V/15N, 5V/15J.

optibelt 5K section SPC

Nominal Power Rating P_N (kW) for $\beta = 180^\circ$ and $L_d = 5600$ mm



Pulleys	v (m/s)	n_k (min ⁻¹)	Datum diameter of small pulley d_{dk} (mm)														Additional power (kW) per belt for speed ratio i				
			224	250	280	300	315	335	355	375	400	450	500	560	630	710	1.01	1.06	1.27 > 1.57		
																	to 1.05	to 1.26	to 1.57		
Statically balanced		700	10.46	13.11	16.13	18.11	19.58	21.52	23.44	25.34	27.68	32.24	36.64	41.70	47.28	53.19	0.14	0.90	1.28	1.57	
		950	13.27	16.71	20.58	23.11	24.97	27.42	29.82	32.18	35.05	40.55	45.70	51.38	57.27	62.91	0.19	1.22	1.73	2.13	
		1450	17.79	22.48	27.64	30.92	33.30	36.35	39.26	42.02	45.25	50.94	55.51	59.36	61.37		0.29	1.86	2.65	3.25	
		2850	20.63	25.52	29.58	31.27	31.96										0.57	3.67	5.20	6.38	
		50	1.08	1.31	1.58	1.75	1.89	2.06	2.23	2.41	2.62	3.05	3.48	3.99	4.58	5.25	0.01	0.06	0.09	0.11	
		100	1.99	2.44	2.94	3.28	3.53	3.87	4.20	4.53	4.95	5.77	6.58	7.56	8.68	9.95	0.02	0.13	0.18	0.22	
		200	3.64	4.49	5.46	6.11	6.59	7.22	7.86	8.49	9.28	10.84	12.38	14.22	16.34	18.73	0.04	0.26	0.37	0.45	
		300	5.16	6.40	7.81	8.75	9.44	10.37	11.29	12.21	13.34	15.60	17.83	20.47	23.50	26.90	0.06	0.39	0.55	0.67	
		350	5.89	7.31	8.94	10.01	10.82	11.88	12.94	13.99	15.30	17.88	20.44	23.45	26.90	30.77	0.07	0.45	0.64	0.78	
		5	400	6.59	8.20	10.04	11.25	12.16	13.36	14.55	15.73	17.21	20.11	22.97	26.35	30.20	34.48	0.08	0.51	0.73	0.90
			450	7.28	9.07	11.11	12.46	13.47	14.80	16.12	17.44	19.07	22.28	25.44	29.15	33.37	38.04	0.09	0.58	0.82	1.01
			500	7.95	9.91	12.16	13.64	14.75	16.21	17.66	19.10	20.88	24.39	27.83	31.86	36.42	41.44	0.10	0.64	0.91	1.12
			550	8.60	10.74	13.19	14.80	16.00	17.59	19.16	20.72	22.65	26.44	30.15	34.48	39.34	44.66	0.11	0.71	1.00	1.23
			600	9.23	11.55	14.19	15.93	17.22	18.93	20.62	22.30	24.37	28.44	32.39	36.99	42.13	47.70	0.12	0.77	1.10	1.34
			650	9.85	12.34	15.17	17.03	18.42	20.24	22.05	23.84	26.05	30.37	34.56	39.40	44.78	50.55	0.13	0.84	1.19	1.45
			700	10.46	13.11	16.13	18.11	19.58	21.52	23.44	25.34	27.68	32.24	36.64	41.70	47.28	53.19	0.14	0.90	1.28	1.57
		10	750	11.05	13.87	17.06	19.16	20.72	22.77	24.80	26.80	29.26	34.04	38.64	43.89	49.62	55.61	0.15	0.96	1.37	1.68
			800	11.63	14.60	17.98	20.19	21.83	23.99	26.11	28.21	30.78	35.77	40.54	45.95	51.80	57.81	0.16	1.03	1.46	1.79
			850	12.19	15.32	18.87	21.19	22.91	25.17	27.39	29.58	32.26	37.44	42.36	47.89	53.80	59.77	0.17	1.09	1.55	1.90
			900	12.74	16.02	19.74	22.16	23.96	26.31	28.63	30.90	33.68	39.03	44.08	49.71	55.63	61.47	0.18	1.16	1.64	2.01
			950	13.27	16.71	20.58	23.11	24.97	27.42												

Power Ratings

optibelt 5K section 8V/25N, 8V/25J

Nominal Power Rating P_N (kW) for β = 180° and 8V 2500/6350 mm L_a



Power Transmission

Table 31

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{ak} (mm)												Additional power (kW) per belt for speed ratio i					
			335	355	375	425	450	475	500	530	560	600	630	710	800	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57	
Statically balanced	5	700	25.67	28.61	31.52	38.62	42.08	45.49	48.82	52.74	56.57	61.51	65.09	74.10	83.23	0.28	1.83	2.60	3.18	
		950	32.09	35.77	39.37	48.03	52.17	56.17	60.03	64.47	68.68	73.95	77.62	86.13	93.33	0.38	2.48	3.52	4.32	
		1450	40.47	44.90	49.10	58.51	62.60	66.25	69.44	72.63	75.10	77.18	77.79			5.38	6.60			
		50	2.63	2.89	3.16	3.82	4.15	4.48	4.80	5.19	5.58	6.10	6.48	7.51	8.65	0.02	0.13	0.19	0.23	
		100	4.87	5.38	5.89	7.15	7.78	8.41	9.03	9.78	10.52	11.51	12.24	14.19	16.37	0.04	0.26	0.37	0.45	
		150	6.97	7.71	8.46	10.30	11.22	12.13	13.03	14.12	15.20	16.63	17.70	20.53	23.68	0.06	0.39	0.56	0.68	
		200	8.97	9.94	10.91	13.31	14.51	15.69	16.88	18.29	19.69	21.56	22.94	26.61	30.68	0.08	0.52	0.74	0.91	
		250	10.89	12.08	13.27	16.22	17.68	19.14	20.59	22.31	24.03	26.30	28.00	32.46	37.40	0.10	0.65	0.93	1.14	
		10	300	12.74	14.15	15.56	19.04	20.76	22.47	24.18	26.21	28.22	30.89	32.87	38.09	43.84	0.12	0.78	1.11	1.36
			350	14.54	16.16	17.78	21.77	23.74	25.71	27.66	29.98	32.28	35.32	37.57	43.49	49.98	0.14	0.91	1.30	1.59
			400	16.28	18.11	19.93	24.42	26.64	28.84	31.02	33.62	36.19	39.58	42.10	48.66	55.82	0.16	1.05	1.48	1.82
			450	17.97	20.00	22.01	26.99	29.44	31.87	34.28	37.14	39.97	43.69	46.44	53.59	61.33	0.18	1.18	1.67	2.05
			500	19.61	21.83	24.04	29.48	32.16	34.81	37.43	40.54	43.60	47.62	50.59	58.27	66.50	0.20	1.31	1.86	2.27
			550	21.20	23.61	26.00	31.89	34.78	37.64	40.46	43.80	47.08	51.38	54.54	62.67	71.30	0.22	1.44	2.04	2.50
		15	600	22.74	25.33	27.90	34.22	37.31	40.36	43.37	46.92	50.41	54.95	58.28	66.79	75.70	0.24	1.57	2.23	2.73
			650	24.23	27.00	29.74	36.46	39.75	42.98	46.16	49.91	53.57	58.33	61.80	70.61	79.69	0.26	1.70	2.41	2.96
			700	25.67	28.61	31.52	38.62	42.08	45.49	48.82	52.74	56.57	61.51	65.09	74.10	83.23	0.28	1.83	2.60	3.18
			750	27.06	30.16	33.23	40.69	44.32	47.87	51.35	55.42	59.38	64.46	68.13	77.26	86.31	0.30	1.96	2.78	3.41
			800	28.40	31.66	34.87	42.67	46.45	50.14	53.74	57.94	62.01	67.20	70.92	80.06	88.88	0.32	2.09	2.97	3.64
			850	29.68	33.09	36.44	44.56	48.47	52.28	55.99	60.30	64.44	69.70	73.44	82.49	90.92	0.34	2.22	3.15	3.87
		20	900	30.91	34.46	37.94	46.34	50.38	54.29	58.09	62.47	66.67	71.95	75.67	84.52	92.42	0.36	2.35	3.34	4.09
			950	32.09	35.77	39.37	48.03	52.17	56.17	60.03	64.47	68.68	73.95	77.62	86.13	93.33	0.38	2.48	3.52	4.32
			1000	33.21	37.01	40.72	49.61	53.84	57.90	61.81	66.27	70.48	75.68	79.25	87.31	93.63	0.40	2.61	3.71	4.55
			1050	34.27	38.18	42.00	51.09	55.38	59.49	63.42	67.87	72.04	77.12	80.56	88.04	93.28	0.42	2.74	3.90	4.78
			1100	35.27	39.29	43.19	52.45	56.79	60.93	64.85	69.27	73.36	78.28	81.53	88.30	92.28	0.44	2.88	4.08	5.00
			1150	36.21	40.32	44.30	53.69	58.06	62.20	66.11	70.46	74.44	79.13	82.16	88.06	90.56	0.46	3.01	4.27	5.23
		25	1200	37.09	41.28	45.33	54.82	59.20	63.32	67.17	71.42	75.25	79.66	82.42	87.31	88.14	0.49	3.14	4.45	5.46
			1250	37.90	42.16	46.27	55.82	60.19	64.27	68.04	72.16	75.80	79.87	82.31	86.03		0.51	3.27	4.64	5.69
			1300	38.65	42.97	47.12	56.69	61.03	65.04	68.71	72.65	76.06	79.74	81.80			0.53	3.40	4.82	5.91
			1350	39.33	43.70	47.88	57.44	61.71	65.63	69.17	72.90	76.04	79.25	80.89			0.55	3.53	5.01	6.14
			1400	39.93	44.34	48.54	58.04	62.24	66.04	69.42	72.90	75.72		79.56			0.57	3.66	5.19	6.37
			1450	40.47	44.90	49.10	58.51	62.60	66.25	69.44	72.63	75.10		77.79			0.59	3.79	5.38	6.60
		30	1500	40.93	45.37	49.56	58.84	62.80	66.27	69.24							0.61	3.92	5.57	6.82
			1550	41.31	45.75	49.91	59.01	62.81	66.08	68.80							0.63	4.05	5.75	7.05
			1600	41.62	46.04	50.16	59.04	62.65	65.69	68.11							0.65	4.18	5.94	7.28
			1650	41.85	46.24	50.30	58.90	62.31	65.08	67.18							0.67	4.31	6.12	7.51
			1700	41.99	46.34	50.33	58.61	61.77	64.25	65.99							0.69	4.44	6.31	7.73
			1750	42.05	46.35	50.24	58.15	61.05	63.19	64.54							0.71	4.57	6.49	7.96
		35	1800	42.03	46.25	50.04	57.52	60.12									0.73	4.70	6.68	8.19
			1850	41.92	46.05	49.71	56.72	58.98									0.75	4.84	6.86	8.42
			1900	41.72	45.74	49.26	55.74	57.64									0.77	4.97	7.05	8.64
			1950	41.42	45.32	48.69	54.58	56.08									0.79	5.10	7.23	8.87
			2000	41.04	44.79	47.98	53.23	54.31									0.81	5.23	7.42	9.10
			2050	40.55	44.15	47.14											0.83	5.36	7.61	9.33
		40	2100	39.97	43.40	46.16											0.85	5.49	7.79	9.55
			2150	39.29	42.52	45.05											0.87	5.62	7.98	9.78
			2200	38.50	41.53	43.79											0.89	5.75	8.16	10.01
			2250	37.62	40.41	42.40											0.91	5.88	8.35	10.23
Where v > 42 m/s, please consult our Applications Engineering Department																				
(40)															v (m/s)					
Dynamically balanced (for details see USA Standard RMA/MPTA)															Pulleys					

Power Ratings

optibelt RED POWER II Section SPZ, 3V/9N, 3V/9J

Nominal Power Rating P_N (kW) for $\beta = 180^\circ$ and $L_d = 1600$ mm



Power Transmission

Table 32

Pulleys v (m/s)	n_k (min ⁻¹)	Datum diameter of small pulley d_{dk} (mm)																	Additional power (kW) per belt for speed ratio i			
		63	71	80	85	90	95	100	112	125	132	140	150	160	180	200		1.01 to 1.05	1.06 to 1.26	1.27 to 1.57		
Statically balanced	700	0.60	0.80	1.02	1.14	1.26	1.38	1.50	1.78	2.08	2.25	2.43	2.66	2.89	3.35	3.80	0.01	0.06	0.09	0.11		
	950	0.77	1.03	1.32	1.48	1.64	1.80	1.96	2.33	2.74	2.95	3.20	3.50	3.80	4.40	4.99	0.01	0.09	0.12	0.15		
	1450	1.08	1.47	1.89	2.13	2.36	2.60	2.83	3.38	3.96	4.28	4.63	5.07	5.50	6.36	7.19	0.02	0.13	0.19	0.23		
	2850	1.80	2.50	3.28	3.70	4.12	4.53	4.94	5.90	6.90	7.43	8.01	8.72	9.41	10.70	11.88	0.04	0.26	0.37	0.46		
	100	0.11	0.15	0.18	0.20	0.22	0.24	0.26	0.31	0.36	0.38	0.41	0.45	0.49	0.56	0.64	0.00	0.01	0.01	0.02		
	200	0.21	0.27	0.34	0.38	0.41	0.45	0.49	0.58	0.67	0.72	0.78	0.85	0.92	1.07	1.21	0.00	0.02	0.03	0.03		
	300	0.30	0.38	0.48	0.54	0.59	0.65	0.70	0.83	0.97	1.04	1.13	1.24	1.34	1.55	1.76	0.00	0.03	0.04	0.05		
	400	0.38	0.49	0.62	0.69	0.77	0.84	0.91	1.08	1.26	1.36	1.47	1.61	1.74	2.02	2.29	0.01	0.04	0.05	0.06		
	500	0.45	0.60	0.76	0.85	0.93	1.02	1.11	1.32	1.54	1.66	1.80	1.97	2.13	2.47	2.80	0.01	0.05	0.07	0.08		
	600	0.53	0.70	0.89	0.99	1.10	1.20	1.30	1.55	1.82	1.96	2.12	2.32	2.52	2.91	3.30	0.01	0.06	0.08	0.10		
	700	0.60	0.80	1.02	1.14	1.26	1.38	1.50	1.78	2.08	2.25	2.43	2.66	2.89	3.35	3.80	0.01	0.06	0.09	0.11		
	800	0.67	0.89	1.14	1.28	1.41	1.55	1.68	2.00	2.35	2.53	2.74	3.00	3.26	3.77	4.28	0.01	0.07	0.11	0.13		
	900	0.74	0.99	1.26	1.41	1.57	1.72	1.87	2.22	2.61	2.81	3.05	3.34	3.62	4.19	4.75	0.01	0.08	0.12	0.15		
	1000	0.80	1.08	1.38	1.55	1.72	1.88	2.05	2.44	2.86	3.09	3.35	3.66	3.98	4.60	5.22	0.01	0.09	0.13	0.16		
	1100	0.87	1.17	1.50	1.68	1.86	2.05	2.23	2.66	3.12	3.36	3.64	3.99	4.33	5.01	5.67	0.02	0.10	0.14	0.18		
	1200	0.93	1.25	1.61	1.81	2.01	2.21	2.40	2.87	3.36	3.63	3.93	4.30	4.67	5.40	6.12	0.02	0.11	0.16	0.19		
	1300	0.99	1.34	1.73	1.94	2.15	2.36	2.57	3.07	3.61	3.89	4.21	4.61	5.01	5.79	6.55	0.02	0.12	0.17	0.21		
	1400	1.05	1.43	1.84	2.07	2.29	2.52	2.74	3.28	3.85	4.15	4.49	4.92	5.34	6.17	6.98	0.02	0.13	0.18	0.23		
	1500	1.11	1.51	1.95	2.19	2.43	2.67	2.91	3.48	4.08	4.40	4.77	5.22	5.67	6.54	7.40	0.02	0.14	0.20	0.24		
	1600	1.17	1.59	2.06	2.31	2.57	2.82	3.08	3.68	4.31	4.65	5.04	5.52	5.99	6.91	7.80	0.02	0.15	0.21	0.26		
	1700	1.23	1.67	2.16	2.44	2.70	2.97	3.24	3.87	4.54	4.90	5.31	5.81	6.30	7.26	8.20	0.02	0.16	0.22	0.27		
	1800	1.28	1.75	2.27	2.55	2.84	3.12	3.40	4.06	4.77	5.14	5.57	6.09	6.61	7.61	8.58	0.03	0.17	0.24	0.29		
	1900	1.34	1.83	2.37	2.67	2.97	3.26	3.56	4.25	4.99	5.38	5.82	6.37	6.91	7.95	8.96	0.03	0.18	0.25	0.31		
	2000	1.39	1.90	2.47	2.79	3.10	3.41	3.71	4.44	5.21	5.62	6.08	6.64	7.20	8.28	9.32	0.03	0.19	0.26	0.32		
	2100	1.44	1.98	2.57	2.90	3.22	3.55	3.87	4.62	5.42	5.85	6.32	6.91	7.49	8.60	9.67	0.03	0.19	0.28	0.34		
	2200	1.49	2.05	2.67	3.01	3.35	3.68	4.02	4.80	5.63	6.07	6.57	7.17	7.77	8.91	10.01	0.03	0.20	0.29	0.35		
	2300	1.54	2.13	2.77	3.12	3.47	3.82	4.16	4.98	5.84	6.29	6.80	7.43	8.04	9.22	10.33	0.03	0.21	0.30	0.37		
	2400	1.59	2.20	2.87	3.23	3.59	3.95	4.31	5.15	6.04	6.51	7.03	7.68	8.31	9.51	10.64	0.03	0.22	0.32	0.39		
	2500	1.64	2.27	2.96	3.34	3.71	4.09	4.45	5.32	6.24	6.72	7.26	7.92	8.56	9.79	10.94	0.04	0.23	0.33	0.40		
	2600	1.69	2.34	3.05	3.44	3.83	4.22	4.60	5.49	6.43	6.93	7.48	8.16	8.82	10.07	11.23	0.04	0.24	0.34	0.42		
	2700	1.74	2.40	3.14	3.55	3.95	4.34	4.73	5.66	6.62	7.13	7.70	8.39	9.06	10.33	11.50	0.04	0.25	0.35	0.44		
	2800	1.78	2.47	3.23	3.65	4.06	4.47	4.87	5.82	6.81	7.33	7.91	8.61	9.29	10.58	11.76	0.04	0.26	0.37	0.45		
	2900	1.83	2.54	3.32	3.75	4.17	4.59	5.01	5.98	6.99	7.52	8.11	8.83	9.52	10.82	12.00	0.04	0.27	0.38	0.47		
	3000	1.87	2.60	3.41	3.85	4.28	4.71	5.14	6.13	7.17	7.71	8.31	9.04	9.74	11.05	12.23	0.04	0.28	0.39	0.48		
	3100	1.91	2.66	3.49	3.94	4.39	4.83	5.27	6.28	7.34	7.89	8.50	9.24	9.95	11.27	12.44	0.04	0.29	0.41	0.50		
	3200	1.95	2.73	3.58	4.04	4.50	4.95	5.39	6.43	7.51	8.07	8.69	9.44	10.15	11.47	12.64	0.05	0.30	0.42	0.52		
	3300	1.99	2.79	3.66	4.13	4.60	5.06	5.52	6.58	7.67	8.24	8.87	9.63	10.35	11.67	12.81	0.05	0.31	0.43	0.53		
	3400	2.03	2.85	3.74	4.22	4.70	5.17	5.64	6.72	7.83	8.41	9.05	9.81	10.53	11.85	12.98	0.05	0.31	0.45	0.55		
	3500	2.07	2.90	3.82	4.31	4.80	5.28	5.75	6.85	7.99	8.57	9.21	9.98	10.70	12.01	13.12	0.05	0.32	0.46	0.56		
	3600	2.11	2.96	3.89	4.40	4.90	5.39	5.87	6.99	8.14	8.73	9.38	10.15	10.87	12.17	13.25	0.05	0.33	0.47	0.58		
	3700	2.15	3.02	3.97	4.49	4.99	5.49	5.98	7.12	8.28	8.88	9.53	10.30	11.02	12.31	13.36	0.05	0.34	0.49	0.60		
	3800	2.18	3.07	4.04	4.57	5.09	5.60	6.09	7.24	8.42	9.02	9.68	10.45	11.17	12.43	13.45	0.05	0.35	0.50	0.61		
	3900	2.22	3.13	4.12	4.65	5.18	5.70	6.20	7.37	8.56	9.16	9.82	10.59	11.31	12.55	13.52	0.06	0.36	0.51	0.63		
	4000	2.25	3.18	4.19	4.73	5.27	5.79	6.30	7.49	8.68	9.29	9.95	10.72	11.43	12.65	13.57	0.06	0.37	0.53	0.64		
	4100	2.29	3.23	4.26	4.81	5.35	5.89	6.41	7.60	8.81	9.42	10.08	10.84	11.54	12.73	13.60	0.06	0.38	0.54	0.66		
	4200	2.32	3.28	4.32	4.89	5.44	5.98	6.50	7.71	8.93	9.54	10.20	10.96	11.65	12.80	13.61	0.06	0.39	0.55	0.68		
	4300	2.35	3.33	4.39	4.96	5.52	6.07	6.60	7.82	9.04	9.65	10.31	11.06	11.74	12.85	13.60	0.06	0.40	0.57	0.69		
	4400	2.38	3.37	4.45	5.03	5.60	6.15	6.69	7.92	9.15	9.76	10.41	11.16	11.82	12.89	13.57	0.06	0.41	0.58	0.71		
	4500	2.41	3.42	4.51	5.10	5.68	6.24	6.78	8.02	9.25	9.86	10.51	11.24	11.89	12.91	13.51	0.06	0.42	0.59	0.73		
Dynamically balanced (for details see DIN 2211)	4600	2.44	3.46	4.58	5.17	5.75	6.32	6.87	8.11	9.34	9.95	10.59	11.32	11.95	12.91	13.44	0.07	0.43	0.60	0.74		
	4700	2.47	3.51	4.63	5.24	5.83	6.40	6.95	8.20	9.43	10.04	10.67	11.38	12.00	12.90	13.34	0.07	0.44	0.62	0.76		
	4800	2.49	3.55	4.69	5.30	5.90	6.47	7.03	8.29	9.52	10.12	10.74	11.44	12.03	12.87	13.22	0.07	0.44	0.63	0.77		
	4900	2.52	3.59	4.75	5.36	5.96	6.54	7.11	8.37	9.59	10.19	10.81	11.49	12.05	12.82	13.07	0.07	0.45	0.64	0.79		
	5000	2.54	3.63	4.80	5.42	6.03	6.61	7.18	8.45	9.67	10.25	10.86	11.52	12.06	12.76	12.90	0.07	0.46	0.66	0.81		
	5100	2.57	3.67	4.85	5.48	6.09	6.68	7.25	8.52	9.73	10.31	10.91	11.54	12.06	12.68	12.71	0.07	0.47	0.67	0.82		
	5200	2.59	3.70	4.90	5.53	6.15	6.74	7.31	8.58	9.79	10.36	10.94	11.56	12.04	12.58	12.49	0.07	0.48	0.68	0.84		
	5300	2.61	3.74	4.95	5.59	6.21	6.80	7.38	8.64	9.84	10.40	10.97	11.56	12.01	12.46		0.08	0.49	0.70	0.85		
	5400	2.63	3.77	4.99	5.64	6.26	6.86	7.43	8.70	9.89	10.44	10.										

Power Ratings

optibelt RED POWER II Section SPA

Nominal Power Rating P_N (kW) for β = 180° and L_d = 2500 mm



Table 33

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)																Additional power (kW) per belt for speed ratio i			
			90	95	100	112	125	132	140	150	160	180	200	224	250	280	315	to 1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57	
Statically balanced	5	700	1.34	1.54	1.73	2.20	2.70	2.97	3.28	3.66	4.03	4.78	5.53	6.41	7.35	8.42	9.66	0.02	0.15	0.21	0.26	
		950	1.72	1.98	2.24	2.86	3.52	3.88	4.28	4.78	5.28	6.27	7.24	8.40	9.63	11.03	12.62	0.03	0.20	0.29	0.36	
		1450	2.40	2.78	3.16	4.07	5.04	5.56	6.15	6.88	7.61	9.03	10.43	12.08	13.81	15.75	17.93	0.05	0.31	0.44	0.54	
		2850	3.91	4.61	5.29	6.91	8.63	9.53	10.54	11.79	13.00	15.33	17.52	19.96	22.35	24.75	27.01	0.09	0.61	0.87	1.07	
		100	0.26	0.29	0.32	0.40	0.48	0.52	0.57	0.64	0.70	0.82	0.94	1.09	1.24	1.42	1.63	0.00	0.02	0.03	0.04	
		200	0.47	0.53	0.59	0.74	0.89	0.98	1.07	1.19	1.31	1.54	1.78	2.06	2.35	2.70	3.09	0.01	0.04	0.06	0.07	
		300	0.66	0.75	0.84	1.05	1.28	1.40	1.54	1.72	1.89	2.23	2.57	2.98	3.41	3.91	4.49	0.01	0.06	0.09	0.11	
		400	0.84	0.96	1.08	1.36	1.65	1.81	2.00	2.22	2.45	2.90	3.34	3.87	4.44	5.08	5.83	0.01	0.09	0.12	0.15	
		500	1.02	1.16	1.30	1.65	2.01	2.21	2.43	2.71	2.99	3.54	4.09	4.73	5.43	6.23	7.14	0.02	0.11	0.15	0.19	
		600	1.18	1.35	1.52	1.93	2.36	2.60	2.86	3.19	3.52	4.17	4.81	5.58	6.40	7.34	8.42	0.02	0.13	0.18	0.22	
		700	1.34	1.54	1.73	2.20	2.70	2.97	3.28	3.66	4.03	4.78	5.53	6.41	7.35	8.42	9.66	0.02	0.15	0.21	0.26	
		800	1.50	1.72	1.94	2.47	3.04	3.34	3.68	4.11	4.54	5.39	6.22	7.22	8.28	9.48	10.87	0.03	0.17	0.24	0.30	
		900	1.64	1.89	2.14	2.73	3.36	3.70	4.08	4.56	5.04	5.98	6.91	8.01	9.18	10.52	12.05	0.03	0.19	0.27	0.34	
		1000	1.79	2.06	2.34	2.98	3.68	4.05	4.48	5.00	5.52	6.56	7.58	8.78	10.07	11.53	13.19	0.03	0.22	0.31	0.37	
	10	1100	1.93	2.23	2.53	3.23	3.99	4.40	4.86	5.43	6.00	7.12	8.23	9.54	10.94	12.51	14.31	0.04	0.24	0.34	0.41	
		1200	2.07	2.39	2.71	3.48	4.30	4.74	5.24	5.86	6.47	7.68	8.88	10.29	11.78	13.47	15.39	0.04	0.26	0.37	0.45	
		1300	2.20	2.55	2.90	3.72	4.60	5.07	5.61	6.27	6.93	8.23	9.51	11.02	12.61	14.41	16.43	0.04	0.28	0.40	0.49	
		1400	2.33	2.70	3.07	3.96	4.90	5.40	5.97	6.68	7.38	8.77	10.13	11.73	13.42	15.31	17.44	0.05	0.30	0.43	0.52	
		1500	2.46	2.86	3.25	4.19	5.19	5.72	6.33	7.08	7.83	9.30	10.73	12.42	14.20	16.19	18.40	0.05	0.32	0.46	0.56	
		1600	2.59	3.00	3.42	4.41	5.48	6.04	6.68	7.48	8.26	9.81	11.33	13.10	14.96	17.04	19.34	0.05	0.34	0.49	0.60	
		1700	2.71	3.15	3.59	4.64	5.76	6.35	7.03	7.86	8.69	10.32	11.91	13.76	15.70	17.86	20.24	0.06	0.37	0.52	0.64	
		1800	2.83	3.29	3.76	4.86	6.03	6.66	7.37	8.25	9.11	10.81	12.47	14.41	16.42	18.64	21.08	0.06	0.39	0.55	0.67	
		1900	2.94	3.43	3.92	5.07	6.30	6.96	7.70	8.62	9.52	11.30	13.03	15.03	17.11	19.40	21.89	0.06	0.41	0.58	0.71	
		2000	3.06	3.57	4.08	5.28	6.57	7.25	8.03	8.98	9.93	11.77	13.56	15.64	17.78	20.12	22.65	0.07	0.43	0.61	0.75	
	15	2100	3.17	3.70	4.23	5.49	6.83	7.54	8.35	9.34	10.32	12.24	14.09	16.22	18.43	20.81	23.36	0.07	0.45	0.64	0.79	
		2200	3.27	3.83	4.38	5.69	7.09	7.83	8.66	9.69	10.71	12.69	14.60	16.79	19.04	21.46	24.03	0.07	0.47	0.67	0.82	
		2300	3.38	3.96	4.53	5.89	7.34	8.10	8.97	10.04	11.09	13.13	15.09	17.34	19.63	22.08	24.64	0.08	0.50	0.70	0.86	
		2400	3.48	4.08	4.68	6.09	7.58	8.38	9.27	10.37	11.45	13.56	15.57	17.87	20.19	22.66	25.20	0.08	0.52	0.73	0.90	
		2500	3.58	4.20	4.82	6.28	7.82	8.64	9.57	10.70	11.81	13.97	16.03	18.37	20.73	23.19	25.70	0.08	0.54	0.76	0.94	
		2600	3.68	4.32	4.96	6.46	8.06	8.90	9.85	11.02	12.16	14.37	16.48	18.85	21.23	23.69	26.15	0.09	0.56	0.79	0.97	
		2700	3.77	4.44	5.09	6.65	8.29	9.16	10.14	11.33	12.50	14.76	16.91	19.31	21.70	24.15	26.54	0.09	0.58	0.82	1.01	
		2800	3.87	4.55	5.23	6.83	8.52	9.41	10.41	11.64	12.84	15.14	17.32	19.75	22.14	24.56	26.87	0.09	0.60	0.86	1.05	
		2900	3.96	4.66	5.36	7.00	8.74	9.65	10.68	11.93	13.16	15.51	17.72	20.17	22.55	24.93	27.14	0.10	0.62	0.89	1.09	
		3000	4.04	4.77	5.48	7.17	8.95	9.89	10.94	12.22	13.47	15.86	18.09	20.55	22.93	25.25	27.34	0.10	0.65	0.92	1.12	
	20	3100	4.13	4.87	5.61	7.34	9.16	10.12	11.19	12.50	13.77	16.20	18.45	20.92	23.27	25.52	27.47	0.10	0.67	0.95	1.16	
		3200	4.21	4.97	5.73	7.50	9.36	10.34	11.44	12.77	14.06	16.52	18.79	21.26	23.57	25.75	27.54	0.11	0.69	0.98	1.20	
		3300	4.29	5.07	5.84	7.66	9.56	10.56	11.67	13.03	14.34	16.83	19.11	21.57	23.84	25.93	27.54	0.11	0.71	1.01	1.24	
		3400	4.37	5.17	5.96	7.81	9.75	10.77	11.90	13.28	14.61	17.12	19.41	21.85	24.08	26.05		0.11	0.73	1.04	1.27	
		3500	4.44	5.26	6.07	7.96	9.94	10.97	12.13	13.52	14.87	17.40	19.69	22.11	24.27	26.12		0.12	0.75	1.07	1.31	
		3600	4.51	5.35	6.17	8.10	10.12	11.17	12.34	13.76	15.12	17.66	19.95	22.34	24.43	26.14		0.12	0.77	1.10	1.35	
		3700	4.58	5.43	6.27	8.24	10.29	11.36	12.55	13.98	15.35	17.91	20.19	22.53	24.54	26.11		0.12	0.80	1.13	1.39	
		3800	4.65	5.52	6.37	8.38	10.46	11.55	12.75	14.19	15.58	18.14	20.41	22.70	24.62			0.13	0.82	1.16	1.42	
		3900	4.71	5.60	6.47	8.51	10.62	11.72	12.94	14.40	15.79	18.35	20.60	22.84	24.65			0.13	0.84	1.19	1.46	
		4000	4.77	5.67	6.56	8.63	10.78	11.89	13.12	14.59	15.99	18.55	20.77	22.95	24.64			0.13	0.86	1.22	1.50	
	25	4100	4.83	5.75	6.65	8.76	10.93	12.05	13.29	14.78	16.18	18.73	20.92	23.02	24.59			0.14	0.88	1.25	1.54	
		4200	4.88	5.82	6.74	8.87	11.07	12.21	13.46	14.95	16.35	18.89	21.05	23.07	24.49			0.14	0.90	1.28	1.57	
		4300	4.94	5.89	6.82	8.98	11.21	12.35	13.61	15.11	16.52	19.04	21.15	23.08				0.14	0.93	1.31	1.61	
		4400	4.99	5.95	6.89	9.09	11.34	12.49	13.76	15.26	16.66	19.17	21.23	23.05				0.15	0.95	1.34	1.65	
		4500	5.03	6.01	6.97	9.19	11.46	12.63	13.90	15.40	16.80	19.28	21.28	22.99				0.15	0.97	1.37	1.69	
		4600	5.07	6.07	7.04	9.29	11.58	12.75	14.03	15.53	16.92	19.36	21.30					0.15	0.99	1.41	1.72	
		4700	5.12	6.12	7.11	9.38	11.69	12.86	14.14	15.65	17.03	19.43	21.30					0.16	1.01	1.44	1.76	
		4800	5.15	6.17	7.17	9.46	11.79	12.97	14.25	15.75	17.13	19.49	21.28					0.16	1.03	1.47	1.80	
		4900	5.19	6.22	7.23	9.54	11.89	13.07	14.35	15.84	17.21	19.52	21.22					0.16	1.05	1.50	1.84	
		5000	5.22	6.26	7.28	9.62	11.97	13.16	14.44	15.92	17.27	19.53	21.14					0.17	1.08	1.53	1.87	
	30	5100	5.25	6.30	7.33	9.69	12.05	13.24	14.52	15.99	17.32	19.52	21.03					0.17	1.10	1.56	1.91	
		5200	5.27	6.34	7.38	9.75	12.13	13.31	14.59	16.05	17.36	19.48	20.90					0.17	1.12	1.59	1.95	
		5300	5.29	6.37	7.42	9.81	12.19	13.38	14.65	16.09	17.38	19.43						0.18	1.14	1.62	1.99	
		5400	5.31	6.40	7.46	9.86	12.25	13.43														

Power Ratings

optibelt RED POWER II Section SPB, 5V/15N, 5V/15J

Nominal Power Rating P_N (kW) for β = 180° and L_d = 3550 mm



Table 34

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)												Additional power (kW) per belt for speed ratio i					
			140	150	160	180	200	224	250	280	315	335	355	375	400	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57	
Statically balanced	5	700	4.02	4.64	5.27	6.50	7.73	9.18	10.74	12.52	14.57	15.73	16.88	18.02	19.44	0.05	0.33	0.47	0.58	
		950	5.19	6.02	6.84	8.48	10.09	12.01	14.05	16.38	19.05	20.55	22.04	23.51	25.32	0.07	0.45	0.64	0.78	
		1450	7.33	8.55	9.75	12.12	14.46	17.21	20.13	23.41	27.12	29.18	31.19	33.16	35.54	0.11	0.69	0.97	1.20	
		2850	12.11	14.21	16.28	20.29	24.11	28.43	32.78	37.30	41.87	44.11	46.05			0.21	1.35	1.92	2.35	
		100	0.74	0.84	0.94	1.14	1.34	1.58	1.84	2.13	2.47	2.67	2.86	3.05	3.29	0.01	0.05	0.07	0.08	
		200	1.36	1.56	1.75	2.14	2.52	2.98	3.47	4.03	4.68	5.05	5.42	5.79	6.24	0.01	0.09	0.13	0.16	
		300	1.94	2.23	2.51	3.07	3.63	4.30	5.02	5.84	6.78	7.32	7.86	8.39	9.06	0.02	0.14	0.20	0.25	
		400	2.49	2.86	3.23	3.97	4.70	5.57	6.51	7.58	8.81	9.52	10.21	10.91	11.77	0.03	0.19	0.27	0.33	
		500	3.02	3.47	3.93	4.84	5.74	6.81	7.96	9.27	10.78	11.64	12.50	13.35	14.40	0.04	0.24	0.34	0.41	
		600	3.52	4.07	4.61	5.68	6.74	8.01	9.37	10.92	12.70	13.72	14.72	15.72	16.96	0.04	0.28	0.40	0.49	
	10	700	4.02	4.64	5.27	6.50	7.73	9.18	10.74	12.52	14.57	15.73	16.88	18.02	19.44	0.05	0.33	0.47	0.58	
		800	4.50	5.20	5.91	7.30	8.69	10.33	12.09	14.09	16.40	17.70	18.99	20.27	21.85	0.06	0.38	0.54	0.66	
		900	4.96	5.75	6.53	8.09	9.63	11.45	13.41	15.63	18.18	19.61	21.04	22.44	24.18	0.07	0.43	0.61	0.74	
		1000	5.42	6.28	7.15	8.86	10.55	12.55	14.69	17.13	19.91	21.48	23.02	24.55	26.43	0.07	0.47	0.67	0.82	
		1100	5.86	6.81	7.75	9.61	11.45	13.63	15.95	18.59	21.60	23.29	24.95	26.59	28.61	0.08	0.52	0.74	0.91	
		1200	6.29	7.32	8.33	10.35	12.33	14.68	17.18	20.01	23.24	25.04	26.82	28.56	30.70	0.09	0.57	0.81	0.99	
		1300	6.72	7.82	8.91	11.07	13.20	15.71	18.38	21.40	24.83	26.74	28.62	30.46	32.71	0.10	0.62	0.87	1.07	
		1400	7.13	8.31	9.47	11.78	14.04	16.72	19.56	22.75	26.37	28.38	30.35	32.28	34.62	0.10	0.66	0.94	1.15	
		1500	7.54	8.78	10.02	12.47	14.87	17.70	20.70	24.06	27.86	29.96	32.02	34.02	36.44	0.11	0.71	1.01	1.24	
		1600	7.93	9.25	10.56	13.14	15.68	18.66	21.81	25.34	29.30	31.48	33.61	35.67	38.16	0.12	0.76	1.08	1.32	
	15	1700	8.32	9.71	11.09	13.81	16.47	19.60	22.89	26.57	30.68	32.93	35.12	37.24	39.78	0.12	0.81	1.14	1.40	
		1800	8.69	10.16	11.60	14.45	17.24	20.51	23.94	27.76	32.00	34.32	36.56	38.71	41.28	0.13	0.85	1.21	1.48	
		1900	9.06	10.59	12.11	15.09	18.00	21.39	24.96	28.90	33.26	35.64	37.91	40.10	42.68	0.14	0.90	1.28	1.57	
		2000	9.42	11.02	12.60	15.70	18.73	22.25	25.94	30.00	34.47	36.88	39.18	41.38	43.95	0.15	0.95	1.34	1.65	
		2100	9.77	11.44	13.08	16.30	19.44	23.09	26.88	31.05	35.60	38.05	40.37	42.55	45.10	0.15	0.99	1.41	1.73	
		2200	10.11	11.84	13.55	16.89	20.13	23.90	27.80	32.06	36.68	39.14	41.45	43.63	46.13	0.16	1.04	1.48	1.81	
		2300	10.44	12.24	14.00	17.46	20.81	24.67	28.67	33.01	37.68	40.14	42.45	44.59	47.01	0.17	1.09	1.55	1.90	
		2400	10.77	12.62	14.45	18.01	21.46	25.43	29.51	33.92	38.61	41.07	43.34	45.43	47.76	0.18	1.14	1.61	1.98	
		2500	11.08	12.99	14.88	18.55	22.09	26.15	30.31	34.77	39.47	41.90	44.14	46.16	48.37	0.18	1.18	1.68	2.06	
		2600	11.39	13.36	15.29	19.07	22.69	26.84	31.06	35.56	40.26	42.65	44.82	46.76	48.83	0.19	1.23	1.75	2.14	
	20	2700	11.68	13.71	15.70	19.57	23.28	27.50	31.78	36.30	40.96	43.31	45.40	47.23		0.20	1.28	1.82	2.23	
		2800	11.97	14.05	16.09	20.05	23.84	28.13	32.45	36.98	41.59	43.86	45.86	47.57		0.21	1.33	1.88	2.31	
		2900	12.24	14.38	16.47	20.52	24.37	28.73	33.09	37.61	42.13	44.32	46.21		0.21	1.37	1.95	2.39		
		3000	12.51	14.69	16.83	20.96	24.88	29.29	33.67	38.17	42.59	44.68			0.22	1.42	2.02	2.47		
		3100	12.76	15.00	17.18	21.39	25.37	29.82	34.21	38.67	42.96	44.93			0.23	1.47	2.08	2.56		
		3200	13.01	15.29	17.52	21.80	25.83	30.32	34.71	39.10	43.24				0.23	1.52	2.15	2.64		
		3300	13.24	15.57	17.84	22.19	26.27	30.78	35.15	39.47	43.42				0.24	1.56	2.22	2.72		
		3400	13.47	15.84	18.15	22.56	26.68	31.20	35.55	39.77					0.25	1.61	2.29	2.80		
		3500	13.68	16.10	18.44	22.91	27.06	31.59	35.89	40.00					0.26	1.66	2.35	2.89		
	25	3600	13.89	16.34	18.72	23.24	27.42	31.94	36.19	40.15					0.26	1.71	2.42	2.97		
		3700	14.08	16.57	18.98	23.54	27.74	32.25	36.43	40.24					0.27	1.75	2.49	3.05		
		3800	14.26	16.79	19.23	23.83	28.04	32.52	36.61						0.28	1.80	2.55	3.13		
		3900	14.43	16.99	19.46	24.09	28.30	32.75	36.74						0.29	1.85	2.62	3.21		
		4000	14.59	17.18	19.67	24.33	28.54	32.94	36.81						0.29	1.89	2.69	3.30		
	30	4100	14.74	17.35	19.87	24.55	28.75	33.08	36.83						0.30	1.94	2.76	3.38		
		4200	14.87	17.52	20.05	24.74	28.92	33.18	36.79						0.31	1.99	2.82	3.46		
		4300	15.00	17.66	20.21	24.91	29.06	33.24							0.32	2.04	2.89	3.54		
		4400	15.11	17.79	20.35	25.06	29.17	33.25							0.32	2.08	2.96	3.63		
		4500	15.20	17.91	20.48	25.18	29.25	33.22							0.33	2.13	3.03	3.71		
		4600	15.29	18.01	20.59	25.28	29.29	33.14							0.34	2.18	3.09	3.79		
		4700	15.36	18.10	20.68	25.35	29.30								0.34	2.23	3.16	3.87		
		4800	15.42	18.17	20.75	25.39	29.27								0.35	2.27	3.23	3.96		
		4900	15.47	18.22	20.80	25.41	29.21								0.36	2.32	3.29	4.04		
		5000	15.50	18.26	20.84	25.40	29.11								0.37	2.37	3.36	4.12		
	40	5100	15.52	18.28	20.85	25.36	28.97								0.37	2.42	3.43	4.20		
		5200	15.53	18.29	20.84	25.30	28.80								0.38	2.46	3.50	4.29		
		5300	15.52	18.28	20.82	25.20									0.39	2.51	3.56	4.37		
		5400	15.50	18.25	20.77	25.08									0.40	2.56	3.63	4.45		
		5500	15.46	18.20	20.70	24.93									0.40	2.61	3.70	4.53		
v _{max} ≤ 55 m/s																v (m/s)				
Where v > 42 m/s, please consult our Applications Engineering Department																Pulleys				
Dynamically balanced (for details see DIN 2211)																				

Table 35

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{sk} (mm)												Additional power (kW) per belt for speed ratio i				
			224	250	280	315	335	355	375	400	450	500	560	630	710	1.01	1.06	1.27	> 1.57
																to 1.05	to 1.26	to 1.57	
Statically balanced	5	700	11.09	13.84	16.98	20.59	22.64	24.66	26.67	29.16	34.06	38.86	44.48	50.84	57.82	0.14	0.90	1.28	1.57
		950	14.23	17.84	21.94	26.64	29.28	31.90	34.48	37.66	43.88	49.88	56.80	64.44	72.55	0.19	1.22	1.73	2.13
		1450	19.73	24.86	30.63	37.14	40.75	44.28	47.72	51.90	59.81	67.09	74.92	82.69	89.59	0.29	1.86	2.65	3.25
		2850	29.03	36.59	44.44	52.30	56.11	59.39								0.57	3.67	5.20	6.38
		50	1.12	1.35	1.63	1.94	2.12	2.30	2.47	2.69	3.13	3.57	4.09	4.69	5.37	0.01	0.06	0.09	0.11
		100	2.07	2.52	3.04	3.64	3.98	4.32	4.66	5.09	5.93	6.76	7.75	8.90	10.20	0.02	0.13	0.18	0.22
		150	2.96	3.62	4.38	5.26	5.75	6.25	6.75	7.36	8.59	9.80	11.25	12.93	14.82	0.04	0.26	0.37	0.45
		200	3.80	4.67	5.66	6.81	7.46	8.11	8.76	9.56	11.16	12.75	14.64	16.82	19.29	0.06	0.39	0.55	0.67
		250	4.61	5.68	6.90	8.32	9.12	9.92	10.71	11.71	13.67	15.62	17.94	20.61	23.63	0.07	0.45	0.64	0.78
		300	5.40	6.67	8.11	9.79	10.74	11.68	12.63	13.80	16.12	18.42	21.15	24.31	27.86	0.08	0.51	0.73	0.90
10	350	6.17	7.63	9.30	11.23	12.32	13.41	14.50	15.84	18.52	21.16	24.30	27.92	31.98	0.09	0.58	0.82	1.01	
	400	6.92	8.57	10.45	12.64	13.87	15.10	16.33	17.85	20.87	23.85	27.38	31.44	36.00	0.10	0.64	0.91	1.12	
	450	7.65	9.49	11.59	14.02	15.40	16.77	18.13	19.82	23.17	26.48	30.40	34.89	39.92	0.11	0.71	1.00	1.23	
	500	8.36	10.39	12.71	15.38	16.89	18.40	19.90	21.76	25.44	29.06	33.34	38.25	43.72	0.12	0.77	1.10	1.34	
	550	9.06	11.28	13.80	16.72	18.37	20.01	21.64	23.66	27.66	31.59	36.23	41.53	47.42	0.13	0.84	1.19	1.45	
	600	9.75	12.15	14.88	18.03	19.81	21.58	23.34	25.53	29.83	34.07	39.05	44.72	51.01	0.14	0.90	1.28	1.57	
	650	10.43	13.00	15.94	19.32	21.24	23.14	25.02	27.36	31.97	36.49	41.80	47.82	54.48	0.15	0.96	1.37	1.68	
	700	11.09	13.84	16.98	20.59	22.64	24.66	26.67	29.16	34.06	38.86	44.48	50.84	57.82	0.16	1.03	1.46	1.79	
	750	11.74	14.67	18.00	21.84	24.01	26.16	28.29	30.93	36.11	41.18	47.09	53.76	61.04	0.17	1.09	1.55	1.90	
	800	12.38	15.48	19.01	23.07	25.36	27.63	29.88	32.66	38.12	43.44	49.63	56.58	64.13	0.18	1.16	1.64	2.01	
15	850	13.01	16.28	20.01	24.28	26.69	29.08	31.44	34.36	40.09	45.65	52.10	59.30	67.08	0.19	1.22	1.73	2.13	
	900	13.63	17.07	20.98	25.47	28.00	30.50	32.98	36.03	42									

Power Ratings

optibelt RED POWER II Section 8V/25N, 8V/25J

Nominal Power Rating P_N (kW) for β = 180° and 8V 2500/6350 mm L_a



Power Transmission

Table 36

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{ak} (mm)												Additional power (kW) per belt for speed ratio i					
			335	355	375	425	450	475	500	530	560	600	630	710	800	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57	
Statically balanced	5	700	28.21	31.31	34.38	41.89	45.56	49.17	52.72	56.90	60.98	66.28	70.14	79.91	89.95	0.28	1.83	2.60	3.18	
		950	35.60	39.51	43.34	52.60	57.04	61.36	65.54	70.37	74.99	80.81	84.91	94.65	103.34	0.38	2.48	3.52	4.32	
		1450	46.12	50.96	55.57	66.08	70.75	75.01	78.82	82.80	86.09	89.34	90.88			0.59	3.79	5.38	6.60	
		50	2.80	3.08	3.36	4.04	4.39	4.73	5.07	5.47	5.88	6.42	6.82	7.88	9.07	0.02	0.13	0.19	0.23	
		100	5.23	5.76	6.29	7.60	8.26	8.91	9.56	10.34	11.11	12.14	12.91	14.95	17.22	0.04	0.26	0.37	0.45	
		150	7.50	8.28	9.05	10.98	11.93	12.88	13.83	14.96	16.09	17.59	18.71	21.67	24.96	0.06	0.39	0.56	0.68	
		200	9.68	10.69	11.70	14.22	15.46	16.70	17.94	19.42	20.89	22.83	24.29	28.13	32.40	0.08	0.52	0.74	0.91	
		250	11.78	13.03	14.27	17.35	18.88	20.40	21.92	23.73	25.53	27.91	29.68	34.37	39.56	0.10	0.65	0.93	1.14	
		10	300	13.81	15.29	16.76	20.40	22.20	24.00	25.78	27.91	30.02	32.82	34.90	40.39	46.44	0.12	0.78	1.11	1.36
			350	15.79	17.49	19.17	23.36	25.43	27.49	29.53	31.97	34.39	37.58	39.96	46.19	53.04	0.14	0.91	1.30	1.59
			400	17.71	19.63	21.53	26.24	28.57	30.88	33.18	35.91	38.62	42.19	44.84	51.77	59.35	0.16	1.05	1.48	1.82
			450	19.58	21.71	23.82	29.04	31.62	34.18	36.72	39.73	42.71	46.64	49.54	57.12	65.35	0.18	1.18	1.67	2.05
			500	21.40	23.74	26.05	31.77	34.59	37.38	40.14	43.43	46.66	50.92	54.06	62.23	71.02	0.20	1.31	1.86	2.27
		15	550	23.18	25.71	28.23	34.42	37.47	40.48	43.46	46.99	50.48	55.04	58.39	67.07	76.34	0.22	1.44	2.04	2.50
			600	24.90	27.63	30.34	36.99	40.26	43.48	46.67	50.43	54.14	58.97	62.52	71.65	81.28	0.24	1.57	2.23	2.73
			650	26.58	29.50	32.39	39.48	42.96	46.38	49.76	53.74	57.64	62.73	66.44	75.93	85.83	0.26	1.70	2.41	2.96
			700	28.21	31.31	34.38	41.89	45.56	49.17	52.72	56.90	60.98	66.28	70.14	79.91	89.95	0.28	1.83	2.60	3.18
			750	29.79	33.07	36.30	44.21	48.06	51.85	55.56	59.91	64.16	69.64	73.61	83.57	93.62	0.30	1.96	2.78	3.41
		20	800	31.32	34.77	38.16	46.45	50.47	54.41	58.26	62.77	67.15	72.78	76.83	86.89	96.83	0.32	2.09	2.97	3.64
			850	32.80	36.41	39.96	48.59	52.77	56.85	60.83	65.47	69.96	75.69	79.79	89.86	99.53	0.34	2.22	3.15	3.87
			900	34.23	37.99	41.69	50.64	54.96	59.17	63.26	68.01	72.58	78.37	82.49	92.45	101.71	0.36	2.35	3.34	4.09
			950	35.60	39.51	43.34	52.60	57.04	61.36	65.54	70.37	74.99	80.81	84.91	94.65	103.34	0.38	2.48	3.52	4.32
			1000	36.92	40.97	44.93	54.46	59.01	63.41	67.66	72.55	77.19	82.99	87.04	96.43	104.39	0.40	2.61	3.71	4.55
		25	1050	38.19	42.36	46.44	56.21	60.85	65.32	69.62	74.54	79.18	84.91	88.86	97.79	104.83	0.42	2.74	3.90	4.78
			1100	39.40	43.69	47.87	57.85	62.57	67.10	71.42	76.33	80.93	86.55	90.36	98.70	104.64	0.44	2.88	4.08	5.00
			1150	40.55	44.95	49.23	59.39	64.16	68.72	73.04	77.93	82.45	87.90	91.53	99.14		0.46	3.01	4.27	5.23
			1200	41.64	46.14	50.50	60.81	65.62	70.18	74.49	79.31	83.72	88.95	92.36	99.10		0.49	3.14	4.45	5.46
			1250	42.66	47.25	51.69	62.12	66.94	71.49	75.75	80.47	84.74	89.70	92.83	98.55		0.51	3.27	4.64	5.69
		30	1300	43.63	48.30	52.80	63.30	68.12	72.63	76.82	81.41	85.50	90.12	92.93			0.53	3.40	4.82	5.91
			1350	44.53	49.26	53.82	64.36	69.15	73.60	77.70	82.12	85.98	90.20	92.64			0.55	3.53	5.01	6.14
			1400	45.36	50.15	54.74	65.29	70.03	74.39	78.36	82.58	86.18					0.57	3.66	5.19	6.37
			1450	46.12	50.96	55.57	66.08	70.75	75.01	78.82	82.80	86.09					0.59	3.79	5.38	6.60
			1500	46.82	51.68	56.31	66.74	71.32	75.43	79.07	82.76	85.70					0.61	3.92	5.57	6.82
		35	1550	47.44	52.32	56.95	67.26	71.72	75.66	79.09							0.63	4.05	5.75	7.05
			1600	47.98	52.88	57.48	67.64	71.95	75.70	78.87							0.65	4.18	5.94	7.28
			1650	48.46	53.34	57.91	67.87	72.00	75.53	78.43							0.67	4.31	6.12	7.51
			1700	48.85	53.72	58.24	67.95	71.88	75.15	77.74							0.69	4.44	6.31	7.73
			1750	49.16	54.00	58.46	67.86	71.57	74.56	76.80							0.71	4.57	6.49	7.96
		40	1800	49.40	54.18	58.56	67.62	71.07									0.73	4.70	6.68	8.19
			1850	49.54	54.27	58.55	67.22	70.38									0.75	4.84	6.86	8.42
			1900	49.61	54.25	58.42	66.65	69.49									0.77	4.97	7.05	8.64
			1950	49.59	54.13	58.18	65.90	68.40									0.79	5.10	7.23	8.87
			2000	49.47	53.91	57.81	64.98	67.10									0.81	5.23	7.42	9.10
			2050	49.27	53.58	57.31											0.83	5.36	7.61	9.33
			2100	48.98	53.14	56.69											0.85	5.49	7.79	9.55
			2150	48.59	52.59	55.93											0.87	5.62	7.98	9.78
			2200	48.10	51.93	55.04											0.89	5.75	8.16	10.01
			2250	47.51	51.15	54.02											0.91	5.88	8.35	10.23
v _{max} ≤ 55 m/s																				
Where v > 42 m/s, please consult our Applications Engineering Department																				
(40)																v (m/s)				
Dynamically balanced (for details see USA Standard RMA/MPTA)																Pulleys				

Power Ratings

optibelt Super X-POWER M=5 Section XPZ, 3VX

Nominal Power Rating P_N (kW) for β = 180° and L_d = 1600 mm



Power Transmission

Table 37

Pulleys v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)																Additional power (kW) per belt for speed ratio i			
		56	60	63	71	80	85	90	95	100	112	125	140	160	180	200		1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57
Statically balanced	5	700	0.72	0.84	0.92	1.14	1.39	1.53	1.80	1.94	2.26	2.42	2.61	3.00	3.51	4.02	4.53	0.01	0.06	0.08	0.10
		950	0.92	1.07	1.18	1.48	1.80	1.98	2.34	2.52	2.94	3.15	3.39	3.91	4.58	5.25	5.90	0.01	0.08	0.11	0.13
		1450	1.27	1.49	1.65	2.08	2.56	2.83	3.35	3.60	4.22	4.52	4.87	5.61	6.58	7.52	8.44	0.02	0.12	0.16	0.20
		2850	2.07	2.46	2.76	3.54	4.39	4.86	5.78	6.24	7.30	7.82	8.42	9.67	11.26	12.77	14.17	0.04	0.23	0.32	0.40
		100	0.14	0.16	0.18	0.22	0.26	0.28	0.33	0.35	0.41	0.43	0.46	0.53	0.62	0.71	0.80	0.00	0.01	0.01	0.01
		200	0.26	0.30	0.32	0.39	0.47	0.52	0.61	0.65	0.75	0.80	0.86	0.99	1.16	1.32	1.49	0.00	0.02	0.02	0.03
		300	0.36	0.42	0.46	0.56	0.67	0.74	0.87	0.93	1.08	1.15	1.24	1.42	1.66	1.90	2.14	0.00	0.02	0.03	0.04
		400	0.46	0.53	0.58	0.71	0.86	0.95	1.11	1.19	1.39	1.48	1.60	1.83	2.15	2.46	2.76	0.00	0.03	0.05	0.06
		500	0.55	0.64	0.70	0.86	1.05	1.15	1.35	1.45	1.69	1.81	1.94	2.23	2.62	2.99	3.37	0.01	0.04	0.06	0.07
		600	0.64	0.74	0.81	1.01	1.22	1.34	1.58	1.70	1.98	2.12	2.28	2.62	3.07	3.51	3.95	0.01	0.05	0.07	0.08
		700	0.72	0.84	0.92	1.14	1.39	1.53	1.80	1.94	2.26	2.42	2.61	3.00	3.51	4.02	4.53	0.01	0.06	0.08	0.10
		800	0.80	0.93	1.03	1.28	1.56	1.72	2.02	2.18	2.54	2.72	2.93	3.37	3.95	4.52	5.08	0.01	0.06	0.09	0.11
		900	0.88	1.02	1.13	1.41	1.72	1.90	2.24	2.41	2.81	3.01	3.24	3.73	4.37	5.01	5.63	0.01	0.07	0.10	0.13
		1000	0.96	1.11	1.23	1.54	1.88	2.07	2.45	2.63	3.08	3.29	3.55	4.09	4.79	5.48	6.17	0.01	0.08	0.11	0.14
		1100	1.03	1.20	1.33	1.66	2.04	2.24	2.65	2.86	3.34	3.57	3.85	4.43	5.20	5.95	6.69	0.01	0.09	0.12	0.15
		1200	1.10	1.28	1.42	1.79	2.19	2.41	2.86	3.07	3.59	3.85	4.15	4.78	5.60	6.41	7.21	0.01	0.10	0.14	0.17
		1300	1.17	1.37	1.52	1.91	2.34	2.58	3.05	3.29	3.84	4.12	4.44	5.11	6.00	6.86	7.71	0.02	0.10	0.15	0.18
		1400	1.24	1.45	1.61	2.03	2.49	2.74	3.25	3.50	4.09	4.39	4.73	5.45	6.38	7.30	8.20	0.02	0.11	0.16	0.19
		1500	1.30	1.53	1.70	2.14	2.63	2.91	3.44	3.71	4.34	4.65	5.01	5.77	6.77	7.74	8.69	0.02	0.12	0.17	0.21
		1600	1.37	1.61	1.78	2.25	2.78	3.06	3.63	3.91	4.58	4.91	5.29	6.09	7.14	8.16	9.16	0.02	0.13	0.18	0.22
		1700	1.43	1.68	1.87	2.37	2.92	3.22	3.82	4.11	4.82	5.16	5.56	6.41	7.51	8.58	9.62	0.02	0.14	0.19	0.24
		1800	1.49	1.76	1.95	2.48	3.06	3.37	4.00	4.31	5.05	5.41	5.83	6.72	7.87	8.99	10.07	0.02	0.14	0.20	0.25
		1900	1.55	1.83	2.04	2.59	3.19	3.53	4.18	4.51	5.28	5.66	6.10	7.02	8.22	9.39	10.52	0.02	0.15	0.22	0.26
		2000	1.61	1.90	2.12	2.69	3.33	3.67	4.36	4.70	5.51	5.90	6.36	7.32	8.57	9.78	10.95	0.02	0.16	0.23	0.28
		2100	1.67	1.97	2.20	2.80	3.46	3.82	4.54	4.89	5.73	6.14	6.62	7.62	8.91	10.16	11.37	0.03	0.17	0.24	0.29
		2200	1.72	2.04	2.28	2.90	3.59	3.97	4.71	5.08	5.95	6.38	6.87	7.91	9.25	10.54	11.78	0.03	0.18	0.25	0.31
		2300	1.78	2.11	2.36	3.00	3.72	4.11	4.88	5.26	6.17	6.61	7.12	8.19	9.58	10.91	12.18	0.03	0.18	0.26	0.32
		2400	1.83	2.18	2.43	3.10	3.84	4.25	5.05	5.45	6.38	6.84	7.37	8.47	9.90	11.26	12.57	0.03	0.19	0.27	0.33
		2500	1.89	2.24	2.51	3.20	3.97	4.39	5.22	5.63	6.59	7.06	7.61	8.75	10.22	11.61	12.94	0.03	0.20	0.28	0.35
		2600	1.94	2.31	2.58	3.30	4.09	4.53	5.38	5.80	6.80	7.29	7.85	9.02	10.52	11.95	13.31	0.03	0.21	0.30	0.36
		2700	1.99	2.37	2.65	3.39	4.21	4.66	5.54	5.98	7.00	7.50	8.08	9.29	10.83	12.29	13.66	0.03	0.22	0.31	0.38
		2800	2.04	2.43	2.72	3.49	4.33	4.80	5.70	6.15	7.20	7.72	8.31	9.55	11.12	12.61	14.01	0.03	0.22	0.32	0.39
		2900	2.09	2.49	2.79	3.58	4.45	4.93	5.86	6.32	7.40	7.93	8.54	9.80	11.41	12.92	14.34	0.04	0.23	0.33	0.40
		3000	2.14	2.55	2.86	3.67	4.57	5.06	6.02	6.49	7.60	8.14	8.76	10.05	11.69	13.22	14.65	0.04	0.24	0.34	0.42
	10	3100	2.19	2.61	2.93	3.76	4.68	5.18	6.17	6.65	7.79	8.34	8.98	10.29	11.96	13.52	14.96	0.04	0.25	0.35	0.43
		3200	2.23	2.67	3.00	3.85	4.80	5.31	6.32	6.81	7.97	8.54	9.19	10.53	12.23	13.80	15.25	0.04	0.26	0.36	0.45
		3300	2.28	2.73	3.06	3.94	4.91	5.43	6.47	6.97	8.16	8.74	9.40	10.77	12.49	14.08	15.53	0.04	0.26	0.37	0.46
		3400	2.32	2.79	3.13	4.03	5.02	5.56	6.61	7.13	8.34	8.93	9.60	11.00	12.74	14.34	15.79	0.04	0.27	0.39	0.47
		3500	2.37	2.84	3.19	4.11	5.13	5.68	6.76	7.28	8.52	9.12	9.81	11.22	12.98	14.59	16.04	0.04	0.28	0.40	0.49
		3600	2.41	2.90	3.25	4.20	5.23	5.80	6.90	7.44	8.70	9.31	10.00	11.44	13.22	14.83	16.28	0.04	0.29	0.41	0.50
		3700	2.45	2.95	3.32	4.28	5.34	5.91	7.04	7.59	8.87	9.49	10.20	11.65	13.44	15.07	16.50	0.05	0.30	0.42	0.52
		3800	2.50	3.00	3.38	4.36	5.44	6.03	7.17	7.73	9.04	9.67	10.38	11.85	13.66	15.29	16.71	0.05	0.30	0.43	0.53
		3900	2.54	3.05	3.44	4.44	5.54	6.14	7.31	7.88	9.20	9.84	10.57	12.05	13.87	15.50	16.90	0.05	0.31	0.44	0.54
		4000	2.58	3.10	3.49	4.52	5.64	6.25	7.44	8.02	9.36	10.01	10.75	12.25	14.08	15.69	17.08	0.05	0.32	0.45	0.56
	15	4100	2.61	3.15	3.55	4.60	5.74	6.36	7.57	8.16	9.52	10.18	10.92	12.44	14.27	15.88	17.24	0.05	0.33	0.47	0.57
		4200	2.65	3.20	3.61	4.67	5.84	6.47	7.70	8.29	9.67	10.34	11.09	12.62	14.46	16.05	17.39	0.05	0.34	0.48	0.58
		4300	2.69	3.25	3.66	4.75	5.93	6.57	7.82	8.43	9.83	10.50	11.26	12.79	14.63	16.22	17.52	0.05	0.34	0.49	0.60
		4400	2.73	3.30	3.72	4.82	6.03	6.68	7.94	8.56	9.97	10.65	11.42	12.96	14.80	16.37	17.63	0.05	0.35	0.50	0.61
		4500	2.76	3.34	3.77	4.89	6.12	6.78	8.06	8.68	10.12	10.80	11.58	13.13	14.96	16.50	17.73	0.06	0.36	0.51	0.63
		4600	2.80	3.39	3.82	4.97	6.21	6.88	8.18	8.81	10.26	10.95	11.73	13.28	15.11	16.63	17.81	0.06	0.37	0.52	0.64
		4700	2.83	3.43	3.87	5.03	6.30	6.98	8.30	8.93	10.40	11.09	11.87	13.43	15.25	16.74	17.87	0.06	0.38	0.53	0.65
		4800	2.86	3.47	3.93	5.10	6.38	7.07	8.41	9.05	10.53	11.23	12.02	13.58	15.38	16.84	17.92	0.06	0.38	0.54	0.67
		4900	2.90	3.52	3.97	5.17	6.47	7.17	8.52	9.17	10.66	11.36	12.15	13.71	15.50	16.92	17.94	0.06	0.39	0.56	0.68
		5000	2.93	3.56	4.02	5.24	6.55	7.26	8.63	9.28	10.78	11.49	12.28	13.84	15.61	17.00	17.95	0.06	0.40	0.57	0.70
	20	5100	2.96	3.60	4.07	5.30	6.63	7.35	8.73	9.39	10.90	11.62	12.41	13.97	15.72	17.05	17.94	0.06	0.41	0.58	0.71
		5200	2.99	3.64	4.12	5.36	6.71	7.44	8.83	9.50	11.02	11.74	12.53	14.08	15.81	17.10	17.91	0.06	0.42	0.59	0.72
		5300	3.02	3.68	4.16	5.43	6.79	7.53	8.93	9.61	11.14	11.85	12.65	14.19	15.89	17.13		0.07	0.42	0.60	0.

Power Ratings

optibelt Super X-POWER M=5 Section XPA

Nominal Power Rating P_N (kW) for $\beta = 180^\circ$ and $L_d = 2500$ mm



Power Transmission

Table 38

Pulleys v (m/s)	n_k (min ⁻¹)	Datum diameter of small pulley d_{dk} (mm)																Additional power (kW) per belt for speed ratio i			
		71	80	85	95	100	112	118	125	140	160	180	200	224	250	280	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57	
Statically balanced	5	700	1.12	1.55	1.78	2.25	2.48	3.04	3.31	3.63	4.32	5.22	6.11	7.00	8.05	9.18	10.46	0.02	0.13	0.19	0.23
		950	1.43	2.00	2.31	2.94	3.24	3.98	4.35	4.77	5.68	6.87	8.05	9.22	10.60	12.08	13.76	0.03	0.18	0.26	0.31
		1450	2.01	2.84	3.31	4.22	4.68	5.77	6.31	6.93	8.26	10.00	11.71	13.39	15.37	17.46	19.81	0.04	0.27	0.39	0.48
		2850	3.31	4.85	5.70	7.37	8.20	10.15	11.11	12.21	14.52	17.49	20.31	22.98	25.96	28.88	31.84	0.08	0.54	0.77	0.94
		100	0.22	0.28	0.32	0.40	0.43	0.52	0.57	0.62	0.73	0.87	1.02	1.16	1.33	1.52	1.73	0.00	0.02	0.03	0.03
		200	0.39	0.52	0.60	0.74	0.81	0.98	1.07	1.17	1.38	1.66	1.94	2.21	2.54	2.89	3.30	0.01	0.04	0.05	0.07
		300	0.55	0.75	0.85	1.06	1.17	1.42	1.54	1.69	2.00	2.41	2.81	3.22	3.70	4.21	4.81	0.01	0.06	0.08	0.10
		400	0.70	0.96	1.10	1.37	1.51	1.84	2.00	2.19	2.60	3.13	3.67	4.19	4.82	5.50	6.27	0.01	0.08	0.11	0.13
		500	0.85	1.16	1.33	1.67	1.84	2.25	2.45	2.68	3.18	3.84	4.50	5.15	5.92	6.75	7.70	0.01	0.09	0.13	0.16
		600	0.99	1.36	1.56	1.96	2.16	2.65	2.88	3.16	3.75	4.54	5.31	6.08	6.99	7.97	9.09	0.02	0.11	0.16	0.20
		700	1.12	1.55	1.78	2.25	2.48	3.04	3.31	3.63	4.32	5.22	6.11	7.00	8.05	9.18	10.46	0.02	0.13	0.19	0.23
		800	1.25	1.73	2.00	2.53	2.79	3.42	3.73	4.09	4.87	5.89	6.90	7.90	9.08	10.35	11.80	0.02	0.15	0.22	0.26
		900	1.37	1.91	2.21	2.80	3.09	3.80	4.14	4.55	5.41	6.55	7.67	8.78	10.10	11.51	13.11	0.03	0.17	0.24	0.30
		1000	1.50	2.09	2.42	3.07	3.39	4.17	4.55	5.00	5.94	7.20	8.43	9.65	11.10	12.64	14.39	0.03	0.19	0.27	0.33
		1100	1.61	2.26	2.62	3.33	3.69	4.53	4.95	5.44	6.47	7.83	9.18	10.51	12.08	13.75	15.65	0.03	0.21	0.30	0.36
		1200	1.73	2.43	2.82	3.59	3.98	4.89	5.34	5.87	6.99	8.46	9.92	11.35	13.04	14.84	16.87	0.04	0.23	0.32	0.40
		1300	1.84	2.60	3.02	3.85	4.26	5.24	5.73	6.30	7.50	9.09	10.64	12.18	13.99	15.91	18.07	0.04	0.25	0.35	0.43
		1400	1.95	2.76	3.21	4.10	4.54	5.59	6.12	6.72	8.01	9.70	11.36	12.99	14.92	16.95	19.23	0.04	0.27	0.38	0.46
		1500	2.06	2.92	3.40	4.35	4.82	5.94	6.49	7.14	8.50	10.30	12.06	13.79	15.82	17.97	20.37	0.04	0.28	0.40	0.49
		1600	2.16	3.08	3.59	4.59	5.09	6.28	6.87	7.55	9.00	10.89	12.75	14.58	16.71	18.96	21.47	0.05	0.30	0.43	0.53
		1700	2.27	3.24	3.77	4.83	5.36	6.61	7.23	7.95	9.48	11.48	13.43	15.34	17.58	19.93	22.53	0.05	0.32	0.46	0.56
		1800	2.37	3.39	3.95	5.07	5.63	6.94	7.60	8.35	9.96	12.05	14.10	16.10	18.43	20.87	23.56	0.05	0.34	0.48	0.59
		1900	2.47	3.54	4.13	5.31	5.89	7.27	7.96	8.75	10.43	12.62	14.75	16.84	19.26	21.78	24.55	0.06	0.36	0.51	0.63
		2000	2.56	3.69	4.31	5.54	6.15	7.59	8.31	9.14	10.89	13.17	15.40	17.56	20.06	22.66	25.50	0.06	0.38	0.54	0.66
		2100	2.66	3.83	4.48	5.77	6.40	7.91	8.66	9.52	11.34	13.72	16.03	18.26	20.85	23.52	26.42	0.06	0.40	0.56	0.69
		2200	2.75	3.98	4.65	5.99	6.65	8.22	9.00	9.90	11.79	14.26	16.64	18.95	21.61	24.34	27.29	0.06	0.42	0.59	0.73
		2300	2.84	4.12	4.82	6.21	6.90	8.53	9.34	10.27	12.23	14.78	17.25	19.62	22.35	25.13	28.12	0.07	0.44	0.62	0.76
		2400	2.93	4.26	4.99	6.43	7.14	8.84	9.67	10.64	12.67	15.30	17.84	20.28	23.06	25.89	28.90	0.07	0.45	0.65	0.79
		2500	3.02	4.39	5.15	6.64	7.38	9.14	10.00	11.00	13.09	15.81	18.41	20.91	23.75	26.62	29.64	0.07	0.47	0.67	0.82
		2600	3.10	4.53	5.31	6.86	7.62	9.43	10.32	11.35	13.51	16.30	18.97	21.53	24.41	27.31	30.33	0.08	0.49	0.70	0.86
		2700	3.19	4.66	5.47	7.07	7.85	9.72	10.64	11.70	13.92	16.79	19.52	22.12	25.05	27.97	30.97	0.08	0.51	0.73	0.89
		2800	3.27	4.79	5.62	7.27	8.08	10.01	10.95	12.04	14.33	17.26	20.05	22.70	25.66	28.59	31.56	0.08	0.53	0.75	0.92
		2900	3.35	4.92	5.78	7.47	8.31	10.29	11.26	12.38	14.72	17.72	20.57	23.25	26.24	29.17	32.10	0.08	0.55	0.78	0.96
		3000	3.43	5.04	5.93	7.67	8.53	10.56	11.56	12.71	15.11	18.17	21.07	23.79	26.80	29.71	32.59	0.09	0.57	0.81	0.99
		3100	3.50	5.16	6.07	7.87	8.75	10.84	11.86	13.03	15.49	18.61	21.55	24.30	27.32	30.21	33.02	0.09	0.59	0.83	1.02
		3200	3.58	5.28	6.22	8.06	8.97	11.10	12.15	13.35	15.86	19.04	22.02	24.80	27.82	30.68	33.39	0.09	0.61	0.86	1.05
		3300	3.65	5.40	6.36	8.25	9.18	11.36	12.43	13.66	16.22	19.45	22.47	25.26	28.28	31.10	33.71	0.10	0.63	0.89	1.09
		3400	3.72	5.52	6.50	8.43	9.38	11.62	12.71	13.97	16.57	19.85	22.91	25.71	28.71	31.47	33.96	0.10	0.64	0.91	1.12
		3500	3.79	5.63	6.64	8.62	9.59	11.87	12.99	14.26	16.91	20.24	23.32	26.13	29.11	31.80	34.16	0.10	0.66	0.94	1.15
		3600	3.86	5.74	6.77	8.79	9.79	12.12	13.26	14.56	17.25	20.62	23.72	26.53	29.47	32.09	34.29	0.11	0.68	0.97	1.19
		3700	3.92	5.85	6.90	8.97	9.98	12.36	13.52	14.84	17.57	20.98	24.10	26.90	29.81	32.33	34.35	0.11	0.70	0.99	1.22
		3800	3.99	5.96	7.03	9.14	10.17	12.60	13.77	15.12	17.89	21.33	24.46	27.25	30.10	32.52		0.11	0.72	1.02	1.25
		3900	4.05	6.06	7.16	9.31	10.36	12.83	14.02	15.39	18.19	21.67	24.81	27.58	30.36	32.66		0.11	0.74	1.05	1.29
		4000	4.11	6.16	7.28	9.47	10.55	13.05	14.27	15.65	18.49	21.99	25.13	27.87	30.59	32.75		0.12	0.76	1.08	1.32
		4100	4.17	6.26	7.40	9.63	10.73	13.27	14.50	15.91	18.78	22.30	25.43	28.14	30.77	32.79		0.12	0.78	1.10	1.35
		4200	4.22	6.36	7.52	9.79	10.90	13.48	14.73	16.15	19.05	22.59	25.71	28.38	30.92	32.78		0.12	0.80	1.13	1.38
		4300	4.28	6.45	7.63	9.94	11.07	13.69	14.96	16.39	19.32	22.87	25.97	28.59	31.03			0.13	0.81	1.16	1.42
		4400	4.33	6.54	7.75	10.09	11.24	13.90	15.18	16.63	19.57	23.13	26.21	28.78	31.10			0.13	0.83	1.18	1.45
		4500	4.38	6.63	7.86	10.24	11.40	14.09	15.39	16.85	19.82	23.38	26.43	28.93	31.13			0.13	0.85	1.21	1.48
		4600	4.43	6.72	7.96	10.38	11.56	14.28	15.59	17.07	20.05	23.61	26.63	29.06	31.12			0.13	0.87	1.24	1.52
		4700	4.48	6.80	8.06	10.52	11.71	14.47	15.79	17.28	20.27	23.82	26.80	29.15				0.14	0.89	1.26	1.55
		4800	4.52	6.88	8.17	10.65	11.86	14.65	15.98	17.48	20.49	24.02	26.95	29.22				0.14	0.91	1.29	1.58
		4900	4.56	6.96	8.26	10.78	12.01	14.82	16.16	17.67	20.69	24.20	27.08	29.25				0.14	0.93	1.32	1.62
		5000	4.60	7.04	8.36	10.91	12.14	14.99	16.34	17.85	20.87	24.36	27.18	29.25				0.15	0.95	1.34	1.65
		5100	4.64	7.11	8.45	11.03	12.28	15.14	16.51	18.03	21.05	24.51	27.26	29.21				0.15	0.97	1.37	1.68
		5200	4.68	7.18																	

Power Ratings

optibelt Super X-POWER M=5 Section XPB, 5VX

Nominal Power Rating P_N (kW) for β = 180° and L_d = 3550 mm



Table 39

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)												Additional power (kW) per belt for speed ratio i				
			112	118	125	140	150	160	180	200	224	250	280	315	400	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57
Statically balanced	5	700	3.32	3.76	4.27	5.36	6.09	6.81	8.26	9.69	11.40	13.24	15.34	17.77	23.56	0.04	0.29	0.41	0.50
		950	4.38	4.97	5.66	7.12	8.09	9.06	10.98	12.89	15.16	17.59	20.36	23.54	31.02	0.06	0.39	0.55	0.68
		1450	6.41	7.29	8.31	10.49	11.92	13.35	16.18	18.96	22.25	25.73	29.65	34.07	44.02	0.09	0.59	0.84	1.03
		2850	11.36	12.96	14.80	18.67	21.18	23.64	28.40	32.90	37.94	42.92	47.97	52.80		0.18	1.17	1.65	2.03
		100	0.55	0.61	0.69	0.86	0.97	1.08	1.30	1.52	1.78	2.07	2.39	2.77	3.69	0.01	0.04	0.06	0.07
		200	1.04	1.17	1.33	1.65	1.87	2.09	2.52	2.95	3.46	4.02	4.65	5.40	7.19	0.01	0.08	0.12	0.14
		300	1.52	1.71	1.94	2.42	2.74	3.06	3.70	4.34	5.10	5.92	6.86	7.96	10.60	0.02	0.12	0.17	0.21
		400	1.98	2.24	2.54	3.17	3.60	4.02	4.87	5.71	6.71	7.79	9.03	10.48	13.94	0.03	0.16	0.23	0.28
		500	2.43	2.75	3.12	3.92	4.44	4.97	6.01	7.05	8.29	9.63	11.17	12.95	17.22	0.03	0.20	0.29	0.36
		600	2.88	3.26	3.70	4.64	5.27	5.90	7.14	8.38	9.86	11.45	13.27	15.38	20.42	0.04	0.25	0.35	0.43
		700	3.32	3.76	4.27	5.36	6.09	6.81	8.26	9.69	11.40	13.24	15.34	17.77	23.56	0.04	0.29	0.41	0.50
		800	3.75	4.25	4.83	6.07	6.90	7.72	9.36	10.98	12.92	15.00	17.37	20.11	26.61	0.05	0.33	0.46	0.57
		900	4.17	4.73	5.39	6.78	7.70	8.62	10.44	12.26	14.42	16.73	19.37	22.41	29.57	0.06	0.37	0.52	0.64
		1000	4.59	5.21	5.93	7.47	8.49	9.50	11.52	13.52	15.89	18.44	21.34	24.66	32.45	0.06	0.41	0.58	0.71
	10	1100	5.01	5.69	6.47	8.15	9.27	10.38	12.58	14.76	17.35	20.12	23.26	26.85	35.22	0.07	0.45	0.64	0.78
		1200	5.42	6.15	7.01	8.83	10.04	11.24	13.62	15.98	18.78	21.76	25.14	28.99	37.88	0.08	0.49	0.70	0.85
		1300	5.82	6.61	7.54	9.50	10.80	12.09	14.66	17.19	20.19	23.38	26.98	31.07	40.43	0.08	0.53	0.75	0.93
		1400	6.22	7.07	8.06	10.16	11.55	12.93	15.67	18.38	21.57	24.96	28.77	33.09	42.86	0.09	0.57	0.81	1.00
		1500	6.61	7.52	8.57	10.81	12.29	13.76	16.67	19.54	22.92	26.50	30.52	35.03	45.15	0.09	0.61	0.87	1.07
		1600	7.00	7.96	9.08	11.45	13.02	14.58	17.66	20.69	24.25	28.01	32.21	36.91	47.31	0.10	0.65	0.93	1.14
		1700	7.38	8.40	9.58	12.09	13.74	15.39	18.63	21.81	25.54	29.47	33.85	38.72	49.32	0.11	0.70	0.99	1.21
		1800	7.76	8.83	10.07	12.71	14.45	16.18	19.58	22.91	26.81	30.90	35.43	40.44	51.17	0.11	0.74	1.05	1.28
		1900	8.13	9.25	10.56	13.33	15.15	16.96	20.52	23.99	28.05	32.28	36.96	42.08	52.85	0.12	0.78	1.10	1.35
		2000	8.49	9.67	11.04	13.94	15.84	17.73	21.43	25.05	29.25	33.62	38.42	43.64	54.37	0.13	0.82	1.16	1.42
	15	2100	8.85	10.08	11.51	14.53	16.52	18.48	22.33	26.08	30.42	34.92	39.82	45.10	55.70	0.13	0.86	1.22	1.50
		2200	9.21	10.49	11.98	15.12	17.18	19.22	23.21	27.08	31.55	36.16	41.15	46.47	56.84	0.14	0.90	1.28	1.57
		2300	9.56	10.89	12.43	15.69	17.83	19.94	24.07	28.06	32.65	37.35	42.41	47.75	57.79	0.15	0.94	1.34	1.64
		2400	9.90	11.28	12.88	16.26	18.47	20.65	24.90	29.00	33.70	38.49	43.60	48.92	58.53	0.15	0.98	1.39	1.71
		2500	10.23	11.67	13.32	16.82	19.10	21.35	25.72	29.92	34.72	39.58	44.71	49.98	59.05	0.16	1.02	1.45	1.78
		2600	10.56	12.04	13.76	17.36	19.71	22.02	26.51	30.81	35.70	40.61	45.74	50.93	59.35	0.16	1.06	1.51	1.85
		2700	10.89	12.42	14.18	17.89	20.31	22.68	27.28	31.67	36.63	41.58	46.70	51.77		0.17	1.10	1.57	1.92
		2800	11.21	12.78	14.59	18.41	20.90	23.33	28.03	32.50	37.52	42.49	47.57	52.49		0.18	1.15	1.63	1.99
		2900	11.52	13.13	15.00	18.92	21.47	23.96	28.75	33.29	38.36	43.34	48.35	53.09		0.18	1.19	1.68	2.06
		3000	11.82	13.48	15.40	19.42	22.02	24.56	29.45	34.05	39.16	44.12	49.04	53.56		0.19	1.23	1.74	2.14
	20	3100	12.12	13.82	15.79	19.90	22.56	25.15	30.12	34.78	39.91	44.84	49.64	53.89		0.20	1.27	1.80	2.21
		3200	12.41	14.15	16.17	20.37	23.08	25.72	30.77	35.47	40.60	45.49	50.14	54.09		0.20	1.31	1.86	2.28
		3300	12.69	14.48	16.53	20.83	23.59	26.28	31.39	36.12	41.25	46.06	50.54	54.16		0.21	1.35	1.92	2.35
		3400	12.96	14.79	16.89	21.27	24.08	26.81	31.98	36.73	41.85	46.57	50.85			0.22	1.39	1.97	2.42
		3500	13.23	15.10	17.24	21.70	24.56	27.32	32.54	37.31	42.39	47	51.04			0.22	1.43	2.03	2.49
		3600	13.49	15.40	17.58	22.11	25.01	27.81	33.07	37.85	42.87	47.35	51.13			0.23	1.47	2.09	2.56
		3700	13.74	15.68	17.91	22.51	25.45	28.28	33.57	38.34	43.30	47.62	51.11			0.23	1.51	2.15	2.63
		3800	13.99	15.96	18.22	22.90	25.87	28.72	34.04	38.79	43.66	47.81				0.24	1.55	2.21	2.71
		3900	14.22	16.23	18.53	23.26	26.27	29.15	34.48	39.20	43.97	47.92				0.25	1.60	2.26	2.78
		4000	14.45	16.49	18.82	23.62	26.65	29.55	34.89	39.57	44.22	47.95				0.25	1.64	2.32	2.85
	25	4100	14.67	16.74	19.10	23.96	27.01	29.92	35.26	39.88	44.40	47.88				0.26	1.68	2.38	2.92
		4200	14.88	16.98	19.37	24.28	27.36	30.28	35.60	40.16	44.52	47.73				0.27	1.72	2.44	2.99
		4300	15.08	17.21	19.63	24.58	27.68	30.60	35.90	40.38	44.57					0.27	1.76	2.50	3.06
		4400	15.27	17.43	19.88	24.87	27.98	30.91	36.17	40.56	44.56					0.28	1.80	2.56	3.13
		4500	15.45	17.64	20.11	25.14	28.26	31.18	36.40	40.69	44.47					0.28	1.84	2.61	3.20
		4600	15.62	17.83	20.33	25.39	28.52	31.44	36.60	40.77	44.32					0.29	1.88	2.67	3.28
		4700	15.79	18.02	20.54	25.62	28.75	31.66	36.75	40.79						0.30	1.92	2.73	3.35
		4800	15.94	18.19	20.73	25.84	28.96	31.86	36.87	40.76						0.30	1.96	2.79	3.42
		4900	16.08	18.36	20.91	26.03	29.15	32.02	36.95	40.68						0.31	2.00	2.85	3.49
		5000	16.22	18.51	21.08	26.21	29.32	32.16	36.99	40.55						0.32	2.05	2.90	3.56
	30	5100	16.34	18.65	21.23	26.37	29.46	32.28	36.99	40.36						0.32	2.09	2.96	3.63
		5200	16.45	18.77	21.37	26.50	29.58	32.36	36.94	40.11						0.33	2.13	3.02	3.70
		5300	16.56	18.89	21.49	26.62	29.67	32.41	36.86							0.34	2.17	3.08	3.77
		5400	16.65	18.99	21.60	26.72	29.74	32.43	36.73							0.34	2.21	3.14	3.84
		5500	16.73	19.08	21.69	26.79	29.78	32.42	36.55							0.35	2.25	3.19	3.92
		5600	16.80	19.15	21.77	26.84	29.80	32.38	36.33							0.35	2.29	3.25	3.99
		5700	16.85	19.22	21.83	26.88	29.79	32.30	36.07							0.36	2.33	3.31	4.06
		5800	16.90	19.27	21.88	26.89	29.75	32.20	35.76							0.37	2.37	3.37	4.13
		5900	16.93	19.30	21.91	26.87	29.68	32.06								0.37	2.41	3.43	4.20
		6000	16.96	19.32	21.92	26.84	29.59	31.88								0.38	2.45	3.48	4.27
Dynamically balanced (																			

Power Ratings

optibelt Super X-POWER M=5 Section XPC

Nominal Power Rating P_N (kW) for β = 180° and L_d = 3550 mm



Table 40

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{sk} (mm)											Additional power (kW) per belt for speed ratio i				
			180	200	224	250	280	315	400	450	500	560	630	710	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57
Statically balanced	5	700	10.79	12.84	15.29	17.93	20.94	24.43	32.74	37.51	42.18	47.65	53.82	60.57	0.08	0.49	0.70	0.85
		950	14.40	17.14	20.39	23.88	27.86	32.42	43.16	49.20	55.01	61.66	68.91	76.46	0.10	0.67	0.95	1.16
		1450	21.27	25.27	29.98	34.98	40.60	46.91	61.06	68.47	75.11	81.94	88.17	92.72	0.16	1.02	1.44	1.77
		2850	37.09	43.48	50.58	57.52	64.43	70.83							0.31	2.00	2.84	3.48
		50	0.85	1.01	1.19	1.40	1.63	1.90	2.56	2.94	3.33	3.79	4.32	4.93	0.01	0.04	0.05	0.06
		100	1.66	1.97	2.34	2.74	3.20	3.74	5.03	5.79	6.55	7.45	8.51	9.71	0.01	0.07	0.10	0.12
		150	2.46	2.92	3.47	4.06	4.74	5.54	7.47	8.59	9.72	11.06	12.62	14.40	0.02	0.11	0.15	0.18
		200	3.24	3.85	4.58	5.37	6.27	7.33	9.87	11.37	12.85	14.63	16.69	19.03	0.02	0.14	0.20	0.24
		250	4.02	4.78	5.68	6.66	7.79	9.10	12.26	14.11	15.95	18.15	20.70	23.59	0.03	0.18	0.25	0.31
		300	4.79	5.70	6.78	7.95	9.29	10.86	14.63	16.83	19.02	21.63	24.66	28.08	0.03	0.21	0.30	0.37
		350	5.56	6.61	7.87	9.22	10.79	12.60	16.97	19.52	22.05	25.07	28.56	32.49	0.04	0.25	0.35	0.43
		400	6.32	7.52	8.95	10.49	12.27	14.33	19.29	22.18	25.05	28.46	32.39	36.82	0.04	0.28	0.40	0.49
		450	7.08	8.42	10.02	11.75	13.74	16.05	21.59	24.82	28.01	31.80	36.17	41.06	0.05	0.32	0.45	0.55
		500	7.83	9.31	11.09	13.00	15.20	17.75	23.87	27.42	30.94	35.09	39.86	45.20	0.05	0.35	0.50	0.61
	10	550	8.58	10.20	12.15	14.25	16.65	19.44	26.13	30.00	33.82	38.33	43.49	49.23	0.06	0.39	0.55	0.67
		600	9.32	11.09	13.20	15.48	18.09	21.12	28.36	32.54	36.65	41.50	47.02	53.14	0.07	0.42	0.60	0.73
		650	10.06	11.97	14.25	16.71	19.52	22.78	30.56	35.04	39.44	44.61	50.47	56.92	0.07	0.46	0.65	0.79
		700	10.79	12.84	15.29	17.93	20.94	24.43	32.74	37.51	42.18	47.65	53.82	60.57	0.08	0.49	0.70	0.85
		750	11.52	13.71	16.33	19.14	22.35	26.06	34.88	39.93	44.87	50.62	57.07	64.08	0.08	0.53	0.75	0.92
		800	12.25	14.58	17.35	20.34	23.75	27.68	37.00	42.32	47.49	53.51	60.21	67.43	0.09	0.56	0.80	0.98
		850	12.97	15.44	18.37	21.53	25.13	29.28	39.09	44.66	50.06	56.31	63.24	70.61	0.09	0.60	0.85	1.04
		900	13.69	16.29	19.39	22.71	26.50	30.86	41.14	46.95	52.57	59.03	66.14	73.63	0.10	0.63	0.90	1.10
		950	14.40	17.14	20.39	23.88	27.86	32.42	43.16	49.20	55.01	61.66	68.91	76.46	0.10	0.67	0.95	1.16
		1000	15.11	17.98	21.39	25.04	29.20	33.97	45.14	51.39	57.39	64.19	71.55	79.11	0.11	0.70	1.00	1.22
	15	1050	15.81	18.81	22.38	26.19	30.53	35.50	47.08	53.53	59.69	66.63	74.05	81.55	0.11	0.74	1.05	1.28
		1100	16.51	19.64	23.36	27.33	31.85	37.00	48.98	55.62	61.91	68.96	76.41	83.78	0.12	0.77	1.10	1.34
		1150	17.21	20.47	24.33	28.46	33.14	38.49	50.85	57.65	64.06	71.18	78.60	85.79	0.12	0.81	1.15	1.40
		1200	17.90	21.28	25.30	29.58	34.43	39.95	52.66	59.62	66.12	73.28	80.64	87.58	0.13	0.84	1.20	1.47
		1250	18.58	22.09	26.25	30.69	35.70	41.39	54.44	61.52	68.10	75.27	82.51	89.12	0.14	0.88	1.25	1.53
		1300	19.26	22.90	27.20	31.78	36.95	42.81	56.17	63.36	70.00	77.13	84.20	90.42	0.14	0.91	1.29	1.59
		1350	19.94	23.70	28.14	32.86	38.18	44.20	57.85	65.14	71.80	78.87	85.71	91.46	0.15	0.95	1.34	1.65
		1400	20.61	24.49	29.07	33.93	39.40	45.57	59.48	66.84	73.50	80.47	87.04	92.23	0.15	0.98	1.39	1.71
		1450	21.27	25.27	29.98	34.98	40.60	46.91	61.06	68.47	75.11	81.94	88.17	92.72	0.16	1.02	1.44	1.77
		1500	21.93	26.04	30.89	36.02	41.78	48.23	62.59	70.03	76.61	83.26	89.10		0.16	1.05	1.49	1.83
	20	1550	22.58	26.81	31.79	37.05	42.93	49.52	64.06	71.51	78.02	84.44	89.82		0.17	1.09	1.54	1.89
		1600	23.23	27.57	32.68	38.06	44.07	50.78	65.48	72.91	79.31	85.47	90.33		0.17	1.12	1.59	1.95
		1650	23.87	28.32	33.55	39.06	45.19	52.01	66.84	74.23	80.49	86.34	90.62		0.18	1.16	1.64	2.02
		1700	24.50	29.07	34.42	40.04	46.29	53.22	68.14	75.46	81.56	87.05			0.18	1.19	1.69	2.08
		1750	25.13	29.80	35.27	41.01	47.37	54.39	69.38	76.61	82.50	87.60			0.19	1.23	1.74	2.14
		1800	25.75	30.53	36.11	41.96	48.42	55.53	70.55	77.67	83.33	87.97			0.20	1.26	1.79	2.20
		1850	26.37	31.25	36.94	42.90	49.45	56.64	71.66	78.64	84.03	88.17			0.20	1.30	1.84	2.26
		1900	26.98	31.96	37.76	43.81	50.46	57.72	72.71	79.52	84.61				0.21	1.33	1.89	2.32
		1950	27.58	32.66	38.57	44.71	51.45	58.76	73.69	80.29	85.05				0.21	1.37	1.94	2.38
		2000	28.17	33.35	39.36	45.60	52.41	59.77	74.59	80.97	85.36				0.22	1.40	1.99	2.44
	25	2050	28.76	34.03	40.14	46.46	53.34	60.74	75.43	81.55	85.53				0.22	1.44	2.04	2.50
		2100	29.34	34.70	40.90	47.31	54.25	61.68	76.19	82.03	85.55				0.23	1.47	2.09	2.56
		2150	29.91	35.36	41.66	48.14	55.13	62.58	76.88	82.40					0.23	1.51	2.14	2.63
		2200	30.48	36.02	42.39	48.95	55.99	63.44	77.49	82.66					0.24	1.54	2.19	2.69
		2250	31.04	36.66	43.12	49.73	56.82	64.26	78.03	82.81					0.24	1.58	2.24	2.75
		2300	31.59	37.29	43.83	50.50	57.62	65.05	78.48	82.84					0.25	1.61	2.29	2.81
		2350	32.13	37.91	44.52	51.25	58.39	65.79	78.85						0.26	1.65	2.34	2.87
		2400	32.67	38.52	45.20	51.98	59.14	66.49	79.14						0.26	1.68	2.39	2.93
		2450	33.19	39.12	45.86	52.68	59.85	67.15	79.35						0.27	1.72	2.44	2.99
		2500	33.71	39.70	46.51	53.37	60.53	67.77	79.46						0.27	1.75	2.49	3.05
	30	2550	34.22	40.28	47.14	54.03	61.19	68.35	79.49						0.28	1.79	2.54	3.11
		2600	34.72	40.84	47.76	54.67	61.81	68.88	79.43						0.28	1.82	2.59	3.18
		2650	35.21	41.39	48.36	55.29	62.40	69.36							0.29	1.86	2.64	3.24
		2700	35.70	41.93	48.94	55.88	62.96	69.80							0.29	1.89	2.69	3.30
		2750	36.17	42.46	49.51	56.45	63.48	70.19							0.30	1.93	2.74	3.36
		2800	36.63	42.98	50.05	57.00	63.97	70.54							0.30	1.96	2.79	3.42
		2850	37.09	43.48	50.58	57.52	64.43	70.83							0.31	2.00	2.84	3.48
		2900	37.54	43.97	51.10	58.02	64.85	71.08							0.31	2.04	2.89	3.54
		2950	37.97	44.44	51.59	58.49	65.23	71.27							0.32	2.07	2.94	3.60
		3000	38.40	44.91	52.06	58.93	65.58	71.42							0.33	2.11	2.99	3.66
	40	3050	38.81	45.35	52.52	59.35	65.90	71.51							0.33	2.14	3.04	3.72
		3100	39.22	45.79	52.96	59.74	66.17	71.55							0.34	2.18	3.09	3.79
		3150	39.62	46.21	53.37	60.11	66.41	71.54							0.34	2.21	3.14	3.85
		3200	40.00	46.62	53.77</													

Power Ratings

optibelt *SUPER TX M=5* Section ZX/X10

Nominal Power Rating P_N (kW) for $\beta = 180^\circ$ and $L_d = 822$ mm



Table 41

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)									Additional power (kW) per belt for speed ratio i					
			40	45	50	56	63	71	80	90	100	112	1.01 to 1.05	1.06 to 1.26	1.27 > 1.57 to 1.57		
Statically balanced	②	700	0.22	0.27	0.32	0.37	0.44	0.51	0.59	0.67	0.76	0.85	0.00	0.02	0.03	0.04	
		950	0.27	0.34	0.40	0.47	0.55	0.64	0.74	0.85	0.96	1.09	0.01	0.02	0.04	0.05	
		1450	0.36	0.45	0.54	0.64	0.75	0.88	1.02	1.18	1.32	1.50	0.01	0.04	0.05	0.08	
		2850	0.54	0.69	0.84	1.01	1.20	1.41	1.64	1.88	2.12	2.39	0.02	0.07	0.11	0.16	
		100	0.05	0.06	0.07	0.08	0.09	0.10	0.12	0.14	0.15	0.17	0.00	0.00	0.00	0.01	
		200	0.09	0.10	0.12	0.14	0.16	0.19	0.21	0.24	0.27	0.31	0.00	0.01	0.01	0.01	
		300	0.12	0.14	0.16	0.19	0.22	0.26	0.30	0.34	0.38	0.43	0.00	0.01	0.01	0.02	
		400	0.15	0.18	0.21	0.24	0.28	0.33	0.38	0.43	0.48	0.54	0.00	0.01	0.01	0.02	
		500	0.17	0.21	0.25	0.29	0.34	0.39	0.45	0.51	0.58	0.65	0.00	0.01	0.02	0.03	
		600	0.20	0.24	0.28	0.33	0.39	0.45	0.52	0.60	0.67	0.76	0.00	0.02	0.02	0.03	
		700	0.22	0.27	0.32	0.37	0.44	0.51	0.59	0.67	0.76	0.85	0.00	0.02	0.03	0.04	
		800	0.24	0.30	0.35	0.41	0.48	0.56	0.65	0.75	0.84	0.95	0.01	0.02	0.03	0.05	
		900	0.26	0.32	0.38	0.45	0.53	0.62	0.71	0.82	0.92	1.04	0.01	0.02	0.03	0.05	
		1000	0.28	0.35	0.41	0.49	0.57	0.67	0.77	0.89	1.00	1.13	0.01	0.03	0.04	0.06	
		1100	0.30	0.37	0.44	0.52	0.62	0.72	0.83	0.95	1.07	1.21	0.01	0.03	0.04	0.06	
		1200	0.32	0.40	0.47	0.56	0.66	0.77	0.89	1.02	1.15	1.30	0.01	0.03	0.04	0.07	
		1300	0.34	0.42	0.50	0.59	0.70	0.81	0.94	1.08	1.22	1.38	0.01	0.03	0.05	0.07	
		1400	0.36	0.44	0.52	0.62	0.74	0.86	1.00	1.14	1.29	1.46	0.01	0.04	0.05	0.08	
		1500	0.37	0.46	0.55	0.65	0.77	0.90	1.05	1.20	1.36	1.53	0.01	0.04	0.06	0.09	
		1600	0.39	0.48	0.58	0.69	0.81	0.95	1.10	1.26	1.42	1.61	0.01	0.04	0.06	0.09	
		1700	0.40	0.50	0.60	0.71	0.85	0.99	1.15	1.32	1.49	1.68	0.01	0.04	0.06	0.10	
		1800	0.42	0.52	0.62	0.74	0.88	1.03	1.20	1.38	1.55	1.75	0.01	0.05	0.07	0.10	
		1900	0.43	0.54	0.65	0.77	0.91	1.07	1.24	1.43	1.61	1.82	0.01	0.05	0.07	0.11	
		2000	0.44	0.56	0.67	0.80	0.95	1.11	1.29	1.48	1.67	1.89	0.01	0.05	0.07	0.11	
		2100	0.46	0.57	0.69	0.83	0.98	1.15	1.34	1.53	1.73	1.95	0.01	0.05	0.08	0.12	
		2200	0.47	0.59	0.71	0.85	1.01	1.19	1.38	1.59	1.78	2.01	0.01	0.06	0.08	0.13	
		2300	0.48	0.61	0.73	0.88	1.04	1.22	1.42	1.63	1.84	2.08	0.02	0.06	0.08	0.13	
		2400	0.49	0.62	0.75	0.90	1.07	1.26	1.46	1.68	1.89	2.14	0.02	0.06	0.09	0.14	
		2500	0.50	0.64	0.77	0.93	1.10	1.29	1.50	1.73	1.95	2.19	0.02	0.06	0.09	0.14	
		2600	0.51	0.65	0.79	0.95	1.13	1.33	1.54	1.78	2.00	2.25	0.02	0.07	0.10	0.15	
		2700	0.52	0.67	0.81	0.97	1.16	1.36	1.58	1.82	2.05	2.31	0.02	0.07	0.10	0.15	
		2800	0.53	0.68	0.83	0.99	1.18	1.39	1.62	1.86	2.09	2.36	0.02	0.07	0.10	0.16	
		2900	0.54	0.70	0.84	1.02	1.21	1.43	1.66	1.91	2.14	2.41	0.02	0.07	0.11	0.17	
		3000	0.55	0.71	0.86	1.04	1.24	1.46	1.70	1.95	2.19	2.46	0.02	0.08	0.11	0.17	
		3100	0.56	0.72	0.88	1.06	1.26	1.49	1.73	1.99	2.23	2.51	0.02	0.08	0.11	0.18	
		3200	0.57	0.74	0.89	1.08	1.29	1.52	1.77	2.03	2.28	2.56	0.02	0.08	0.12	0.18	
		3300	0.58	0.75	0.91	1.10	1.31	1.55	1.80	2.07	2.32	2.60	0.02	0.08	0.12	0.19	
		3400	0.59	0.76	0.93	1.12	1.34	1.57	1.83	2.10	2.36	2.65	0.02	0.09	0.13	0.19	
		3500	0.60	0.77	0.94	1.14	1.36	1.60	1.86	2.14	2.40	2.69	0.02	0.09	0.13	0.20	
		3600	0.60	0.78	0.95	1.16	1.38	1.63	1.89	2.17	2.44	2.73	0.02	0.09	0.13	0.21	
		3700	0.61	0.79	0.97	1.17	1.40	1.66	1.93	2.21	2.47	2.77	0.03	0.09	0.14	0.21	
		3800	0.62	0.80	0.98	1.19	1.43	1.68	1.95	2.24	2.51	2.81	0.03	0.10	0.14	0.22	
		3900	0.62	0.81	1.00	1.21	1.45	1.71	1.98	2.27	2.54	2.84	0.03	0.10	0.14	0.22	
		4000	0.63	0.82	1.01	1.23	1.47	1.73	2.01	2.30	2.58	2.88	0.03	0.10	0.15	0.23	
		4100	0.64	0.83	1.02	1.24	1.49	1.75	2.04	2.33	2.61	2.91	0.03	0.10	0.15	0.23	
		4200	0.64	0.84	1.03	1.26	1.51	1.78	2.07	2.36	2.64	2.94	0.03	0.11	0.15	0.24	
		4300	0.65	0.85	1.05	1.27	1.53	1.80	2.09	2.39	2.67	2.97	0.03	0.11	0.16	0.25	
		4400	0.65	0.86	1.06	1.29	1.54	1.82	2.12	2.42	2.70	3.00	0.03	0.11	0.16	0.25	
		4500	0.66	0.87	1.07	1.30	1.56	1.84	2.14	2.44	2.72	3.02	0.03	0.12	0.17	0.26	
		4600	0.66	0.87	1.08	1.32	1.58	1.86	2.16	2.47	2.75	3.05	0.03	0.12	0.17	0.26	
		4700	0.67	0.88	1.09	1.33	1.60	1.88	2.18	2.49	2.77	3.07	0.03	0.12	0.17	0.27	
		4800	0.67	0.89	1.10	1.34	1.61	1.90	2.21	2.52	2.80	3.09	0.03	0.12	0.18	0.27	
		4900	0.68	0.90	1.11	1.36	1.63	1.92	2.23	2.54	2.82	3.11	0.03	0.13	0.18	0.28	
		5000	0.68	0.90	1.12	1.37	1.64	1.94	2.25	2.56	2.84	3.13	0.03	0.13	0.18	0.29	
		5100	0.68	0.91	1.13	1.38	1.66	1.96	2.27	2.58	2.86	3.14	0.03	0.13	0.19	0.29	
		5200	0.69	0.92	1.14	1.39	1.67	1.97	2.28	2.60	2.87	3.16	0.04	0.13	0.19	0.30	
		5300	0.69	0.92	1.15	1.40	1.69	1.99	2.30	2.61	2.89	3.17	0.04	0.14	0.20	0.30	
		5400	0.69	0.93	1.15	1.41	1.70	2.00	2.32	2.63	2.91	3.18	0.04	0.14	0.20	0.31	
		5500	0.69	0.93	1.16	1.42	1.71	2.02	2.33	2.65	2.92	3.19	0.04	0.14	0.20	0.31	
		5600	0.70	0.94	1.17	1.43	1.72	2.03	2.35	2.66	2.93	3.20	0.04	0.14	0.21	0.32	
		5800	0.70	0.95	1.18	1.45	1.75	2.06	2.38	2.69	2.95	3.21	0.04	0.15	0.21	0.33	
		6000	0.70	0.96	1.20	1.47	1.77	2.08	2.40	2.71	2.97	3.21	0.04	0.15	0.22	0.34	
		6200	0.71	0.96	1.21	1.49	1.79	2.10	2.42	2.72	2.97	3.20	0.04	0.16	0.23	0.35	
		6400	0.71	0.97	1.22	1.50	1.81	2.12	2.44	2.74	2.98	3.18	0.04	0.16	0.24	0.37	
		6600	0.71	0.98	1.23	1.51	1.82	2.14	2.45	2.74	2.97	3.16	0.04	0.17	0.24	0.38	
		6800	0.71	0.98	1.24	1.52	1.83	2.15	2.46	2.75	2.96	3.13	0.05	0.17	0.25	0.39	
		7000	0.71	0.98	1.24	1.53	1.84	2.16	2.47	2.74	2.95	3.09	0.05	0.18	0.26	0.40	
		7200	0.71	0.98	1.25	1.54	1.85	2.17	2.47	2.74	2.93	3.04	0.05	0.18	0.27	0.41	
		7400	0.70	0.99	1.25	1.55	1.86	2.17	2.47	2.73	2.90	2.99	0.05	0.19	0.27	0.42	
		7600	0.70	0.99	1.25	1.55	1.86	2.18	2.47	2.71			0.05	0.19	0.28	0.43	
		7800	0.70	0.99	1.26	1.55	1.87	2.18	2.46	2.69	Where v > 30 m/s, please consult our Applications Engineering Department			0.05	0.20	0.29	0.45
		8000	0.69	0.98	1.26	1.56	1.87	2.17	2.45	2.66				0.05	0.20	0.30	0.46
		8200	0.68	0.98	1.25	1.56	1.87	2.17	2.43					0.06	0.21	0.30	0.47
		8400	0.68	0.98	1.25	1.55	1.86	2.16	2.41					0.06	0.21	0.31	0.48
			②⑤	②⑤	②⑤	③⑤	③⑤	③⑤				v (m/s)					
Dynamically balanced (for details see DIN 2211)												Pulleys					

Power Ratings

optibelt *SUPER TX M=5* Section AX/X13

Nominal Power Rating P_N (kW) for $\beta = 180^\circ$ and $L_d = 1730$ mm



Table 42

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)															Additional power (kW) per belt for speed ratio i			
			63	71	80	90	95	100	106	112	118	125	132	140	150	160	180	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57
Statically balanced	②	700	0.67	0.86	1.07	1.29	1.40	1.51	1.64	1.77	1.90	2.04	2.19	2.35	2.56	2.76	3.15	0.02	0.08	0.12	0.18
		950	0.82	1.06	1.33	1.61	1.76	1.90	2.06	2.23	2.39	2.58	2.76	2.97	3.23	3.49	3.98	0.03	0.11	0.16	0.24
		1450	1.05	1.39	1.76	2.16	2.36	2.56	2.79	3.02	3.25	3.51	3.76	4.05	4.40	4.74	5.41	0.04	0.17	0.24	0.37
		2850	1.39	1.96	2.58	3.23	3.55	3.86	4.23	4.58	4.92	5.31	5.68	6.09	6.57	7.03	7.84	0.09	0.33	0.47	0.73
		100	0.16	0.19	0.23	0.28	0.30	0.32	0.34	0.37	0.39	0.42	0.45	0.48	0.52	0.56	0.63	0.00	0.01	0.02	0.03
		200	0.27	0.34	0.41	0.49	0.52	0.56	0.61	0.65	0.70	0.75	0.80	0.86	0.93	1.00	1.14	0.01	0.02	0.03	0.05
		300	0.37	0.46	0.56	0.67	0.73	0.78	0.84	0.91	0.97	1.04	1.11	1.20	1.30	1.40	1.59	0.01	0.03	0.05	0.08
		400	0.46	0.57	0.70	0.84	0.91	0.98	1.06	1.14	1.22	1.32	1.41	1.51	1.64	1.77	2.02	0.01	0.05	0.07	0.10
		500	0.54	0.68	0.83	1.00	1.08	1.17	1.27	1.36	1.46	1.57	1.68	1.81	1.96	2.11	2.41	0.02	0.06	0.08	0.13
		600	0.61	0.77	0.95	1.15	1.25	1.34	1.46	1.57	1.68	1.81	1.94	2.09	2.27	2.44	2.79	0.02	0.07	0.10	0.15
Statically balanced	⑤	700	0.67	0.86	1.07	1.29	1.40	1.51	1.64	1.77	1.90	2.04	2.19	2.35	2.56	2.76	3.15	0.02	0.08	0.12	0.18
		800	0.74	0.94	1.17	1.42	1.55	1.67	1.81	1.96	2.10	2.26	2.43	2.61	2.84	3.06	3.50	0.02	0.09	0.13	0.21
		900	0.79	1.02	1.28	1.55	1.69	1.82	1.98	2.14	2.30	2.48	2.65	2.86	3.10	3.35	3.82	0.03	0.10	0.15	0.23
		1000	0.85	1.10	1.37	1.67	1.82	1.97	2.14	2.31	2.48	2.68	2.87	3.09	3.36	3.62	4.14	0.03	0.11	0.17	0.26
		1100	0.90	1.17	1.47	1.79	1.95	2.11	2.30	2.48	2.66	2.88	3.08	3.32	3.61	3.89	4.44	0.03	0.13	0.18	0.28
		1200	0.94	1.23	1.56	1.90	2.07	2.24	2.44	2.64	2.84	3.06	3.29	3.54	3.84	4.15	4.73	0.04	0.14	0.20	0.31
		1300	0.99	1.30	1.64	2.01	2.19	2.37	2.59	2.80	3.01	3.25	3.48	3.75	4.07	4.39	5.01	0.04	0.15	0.22	0.33
		1400	1.03	1.36	1.72	2.11	2.31	2.50	2.72	2.95	3.17	3.42	3.67	3.95	4.29	4.63	5.28	0.04	0.16	0.23	0.36
		1500	1.07	1.42	1.80	2.21	2.42	2.62	2.86	3.09	3.32	3.59	3.85	4.14	4.50	4.86	5.53	0.05	0.17	0.25	0.38
		1600	1.10	1.47	1.87	2.31	2.52	2.74	2.99	3.23	3.47	3.75	4.03	4.33	4.71	5.07	5.78	0.05	0.18	0.26	0.41
Statically balanced	⑩	1700	1.14	1.52	1.95	2.40	2.63	2.85	3.11	3.37	3.62	3.91	4.19	4.51	4.90	5.28	6.01	0.05	0.20	0.28	0.44
		1800	1.17	1.57	2.01	2.49	2.73	2.96	3.23	3.50	3.76	4.06	4.36	4.69	5.09	5.48	6.23	0.05	0.21	0.30	0.46
		1900	1.20	1.62	2.08	2.58	2.82	3.06	3.34	3.62	3.89	4.21	4.51	4.85	5.27	5.67	6.44	0.06	0.22	0.31	0.49
		2000	1.23	1.66	2.14	2.66	2.91	3.16	3.45	3.74	4.02	4.35	4.66	5.01	5.44	5.86	6.64	0.06	0.23	0.33	0.51
		2100	1.25	1.71	2.20	2.74	3.00	3.26	3.56	3.86	4.15	4.48	4.80	5.17	5.60	6.03	6.83	0.06	0.24	0.35	0.54
		2200	1.28	1.75	2.26	2.81	3.08	3.35	3.66	3.97	4.27	4.61	4.94	5.31	5.76	6.19	7.00	0.07	0.25	0.36	0.56
		2300	1.30	1.78	2.32	2.89	3.16	3.44	3.76	4.07	4.38	4.73	5.07	5.45	5.91	6.35	7.16	0.07	0.26	0.38	0.59
		2400	1.32	1.82	2.37	2.96	3.24	3.52	3.85	4.18	4.49	4.85	5.20	5.58	6.05	6.49	7.31	0.07	0.28	0.40	0.62
		2500	1.34	1.85	2.42	3.02	3.32	3.60	3.94	4.27	4.59	4.96	5.32	5.71	6.18	6.63	7.45	0.08	0.29	0.41	0.64
		2600	1.35	1.89	2.47	3.09	3.39	3.68	4.03	4.37	4.69	5.07	5.43	5.83	6.30	6.75	7.58	0.08	0.30	0.43	0.67
Statically balanced	⑮	2700	1.37	1.92	2.51	3.15	3.46	3.76	4.11	4.45	4.79	5.17	5.53	5.94	6.42	6.87	7.69	0.08	0.31	0.45	0.69
		2800	1.38	1.94	2.55	3.21	3.52	3.83	4.19	4.54	4.88	5.26	5.63	6.04	6.52	6.98	7.79	0.09	0.32	0.46	0.72
		2900	1.39	1.97	2.60	3.26	3.58	3.90	4.26	4.62	4.96	5.35	5.73	6.14	6.62	7.07	7.88	0.09	0.33	0.48	0.74
		3000	1.40	2.00	2.63	3.31	3.64	3.96	4.33	4.69	5.04	5.44	5.82	6.23	6.71	7.16	7.95	0.09	0.34	0.50	0.77
		3100	1.41	2.02	2.67	3.36	3.70	4.02	4.40	4.77	5.12	5.52	5.90	6.31	6.79	7.24	8.01	0.09	0.36	0.51	0.80
		3200	1.42	2.04	2.70	3.41	3.75	4.08	4.46	4.83	5.19	5.59	5.97	6.38	6.86	7.30	8.06	0.10	0.37	0.53	0.82
		3300	1.43	2.06	2.74	3.45	3.80	4.13	4.52	4.89	5.25	5.66	6.04	6.45	6.93	7.36	8.09	0.10	0.38	0.55	0.85
		3400	1.43	2.07	2.76	3.49	3.84	4.18	4.57	4.95	5.31	5.72	6.10	6.51	6.98	7.41	8.11	0.10	0.39	0.56	0.87
		3500	1.43	2.09	2.79	3.53	3.88	4.23	4.62	5.00	5.37	5.77	6.15	6.56	7.03	7.44	8.11	0.11	0.40	0.58	0.90
		3600	1.44	2.10	2.82	3.57	3.92	4.27	4.67	5.05	5.42	5.82	6.20	6.61	7.06	7.47		0.11	0.41	0.60	0.92
Statically balanced	⑳	3700	1.44	2.11	2.84	3.60	3.96	4.31	4.71	5.10	5.46	5.87	6.24	6.64	7.09	7.48		0.11	0.42	0.61	0.95
		3800	1.43	2.12	2.86	3.63	3.99	4.34	4.75	5.14	5.50	5.90	6.28	6.67	7.11	7.48		0.12	0.44	0.63	0.98
		3900	1.43	2.13	2.88	3.65	4.02	4.38	4.78	5.17	5.53	5.93	6.30	6.69	7.11	7.47		0.12	0.45	0.65	1.00
		4000	1.43	2.14	2.89	3.68	4.05	4.40	4.81	5.20	5.56	5.96	6.32	6.70	7.11	7.45		0.12	0.46	0.66	1.03
		4100	1.42	2.14	2.91	3.70	4.07	4.43	4.84	5.22	5.59	5.98	6.34	6.70	7.10			0.12	0.47	0.68	1.05
		4200	1.42	2.14	2.92	3.72	4.09	4.45	4.86	5.24	5.60	5.99	6.34	6.70	7.07			0.13	0.48	0.70	1.08
		4300	1.41	2.15	2.93	3.73	4.11	4.47	4.88	5.26	5.61	6.00	6.34	6.68	7.04			0.13	0.49	0.71	1.10
		4400	1.40	2.14	2.93	3.74	4.12	4.48	4.89	5.27	5.62	6.00	6.33	6.66	7.00			0.13	0.51	0.73	1.13
		4500	1.39	2.14	2.94	3.75	4.13	4.49	4.90	5.27	5.62	5.99	6.31	6.63	6.94			0.14	0.52	0.74	1.15
		4600	1.37	2.14	2.94	3.76	4.14	4.49	4.90	5.27	5.61	5.97	6.29					0.14	0.53	0.76	1.18
Statically balanced	㉑	4700	1.36	2.13	2.94	3.76	4.14	4.50	4.90	5.27	5.60	5.95	6.25					0.14	0.54	0.78	1.21
		4800	1.34	2.12	2.94	3.76	4.14	4.49	4.89	5.26	5.59	5.92	6.21					0.15	0.55	0.79	1.23
		4900	1.33	2.11	2.93	3.76	4.13	4.49	4.88	5.24	5.56	5.89	6.16					0.15	0.56	0.81	1.26
		5000	1.31	2.10	2.92	3.75	4.13	4.48	4.87	5.22	5.53	5.85	6.11					0.15	0.57	0.83	1.28
		5100	1.29	2.09	2.91	3.74	4.11	4.46	4.85	5.19	5.50							0.16	0.59	0.84	1.31
		5200	1.27	2.07	2.90	3.73	4.10	4.45	4.82	5.16	5.46							0.16	0.60	0.86	1.33
		5300	1.25	2.05	2.89	3.71	4.08	4.42	4.79	5.12	5.41							0.16	0.61	0.88	1.36
		5400	1.22	2.04	2.87	3.69	4.06	4.40	4.76	5.08	5.35							0.16	0.62	0.89	1.39
		5500	1.20	2.01	2.85	3.67	4.03	4.37	4.72	5.03	5.29							0.17	0.63	0.91	1.41
		5600	1.17	1.99	2.83	3.64	4.00	4.33	4.68									0.17	0.64	0.93	1.44
5700	1.14	1.97	2.80	3.61	3.97	4.29	4.63														

Power Ratings

optibelt *SUPER TX M=5* Section BX/X17

Nominal Power Rating P_N (kW) for β = 180° and L_d = 2280 mm



Table 43

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)																Additional power (kW) per belt for speed ratio i				
			90	100	106	112	118	125	132	140	160	180	190	200	212	224	250	280	1.01 to 1.05	1.06 to 1.26	1.27 > 1.57 to 1.57		
Statically balanced	5	700	1.70	2.01	2.20	2.38	2.56	2.77	2.98	3.21	3.79	4.35	4.63	4.90	5.23	5.55	6.22	6.98	0.03	0.12	0.18	0.28	
		950	2.12	2.52	2.76	2.99	3.23	3.49	3.76	4.06	4.79	5.51	5.86	6.20	6.61	7.01	7.85	8.78	0.04	0.17	0.24	0.37	
		1450	2.82	3.39	3.72	4.05	4.37	4.75	5.11	5.53	6.53	7.49	7.95	8.40	8.94	9.45	10.52	11.66	0.07	0.26	0.37	0.57	
		2850	4.16	5.06	5.59	6.10	6.60	7.16	7.70	8.30	9.67	10.86	11.39	11.87	12.39	12.82	13.51	13.82	0.13	0.50	0.72	1.12	
		100	0.37	0.42	0.46	0.49	0.53	0.57	0.61	0.65	0.76	0.87	0.93	0.98	1.04	1.11	1.24	1.40	0.00	0.02	0.03	0.04	
		200	0.64	0.75	0.82	0.88	0.94	1.01	1.09	1.17	1.37	1.57	1.67	1.76	1.88	1.99	2.24	2.52	0.01	0.04	0.05	0.08	
		300	0.89	1.04	1.13	1.22	1.31	1.41	1.52	1.63	1.92	2.20	2.34	2.47	2.63	2.80	3.14	3.53	0.01	0.05	0.08	0.12	
		400	1.11	1.31	1.42	1.54	1.65	1.78	1.91	2.06	2.43	2.78	2.96	3.13	3.34	3.54	3.98	4.47	0.02	0.07	0.10	0.16	
		500	1.32	1.56	1.70	1.83	1.97	2.13	2.29	2.47	2.90	3.33	3.54	3.75	4.00	4.24	4.77	5.36	0.02	0.09	0.13	0.20	
		600	1.51	1.79	1.95	2.11	2.27	2.46	2.64	2.85	3.36	3.85	4.10	4.34	4.63	4.91	5.51	6.19	0.03	0.11	0.15	0.24	
		700	1.70	2.01	2.20	2.38	2.56	2.77	2.98	3.21	3.79	4.35	4.63	4.90	5.23	5.55	6.22	6.98	0.03	0.12	0.18	0.28	
		800	1.87	2.22	2.43	2.63	2.84	3.07	3.30	3.56	4.20	4.83	5.14	5.44	5.80	6.15	6.90	7.73	0.04	0.14	0.20	0.32	
		900	2.04	2.42	2.65	2.87	3.10	3.36	3.61	3.90	4.60	5.29	5.62	5.95	6.34	6.73	7.54	8.44	0.04	0.16	0.23	0.35	
		1000	2.19	2.61	2.86	3.11	3.35	3.63	3.91	4.22	4.98	5.72	6.09	6.44	6.86	7.28	8.15	9.12	0.05	0.18	0.25	0.39	
		10	1100	2.35	2.80	3.07	3.33	3.59	3.89	4.19	4.53	5.35	6.14	6.53	6.91	7.36	7.80	8.73	9.75	0.05	0.19	0.28	0.43
			1200	2.49	2.98	3.26	3.55	3.83	4.15	4.47	4.83	5.70	6.55	6.96	7.36	7.84	8.31	9.28	10.34	0.06	0.21	0.31	0.47
			1300	2.63	3.15	3.45	3.75	4.05	4.39	4.73	5.11	6.04	6.94	7.37	7.80	8.29	8.78	9.80	10.90	0.06	0.23	0.33	0.51
			1400	2.76	3.31	3.63	3.95	4.27	4.63	4.99	5.39	6.37	7.31	7.76	8.21	8.73	9.23	10.29	11.42	0.07	0.25	0.36	0.55
			1500	2.89	3.47	3.81	4.14	4.48	4.86	5.23	5.66	6.68	7.66	8.14	8.60	9.14	9.66	10.74	11.90	0.07	0.26	0.38	0.59
			1600	3.01	3.62	3.98	4.33	4.68	5.08	5.47	5.91	6.98	8.00	8.49	8.97	9.53	10.07	11.17	12.33	0.07	0.28	0.41	0.63
			1700	3.13	3.76	4.14	4.51	4.87	5.29	5.70	6.16	7.27	8.32	8.83	9.32	9.89	10.44	11.56	12.73	0.08	0.30	0.43	0.67
			1800	3.24	3.90	4.30	4.68	5.06	5.49	5.92	6.40	7.55	8.63	9.15	9.65	10.24	10.80	11.92	13.08	0.08	0.32	0.46	0.71
			1900	3.35	4.04	4.45	4.85	5.24	5.69	6.13	6.62	7.81	8.92	9.45	9.97	10.56	11.12	12.25	13.38	0.09	0.33	0.48	0.75
			2000	3.45	4.17	4.59	5.00	5.41	5.88	6.33	6.84	8.06	9.20	9.74	10.26	10.86	11.42	12.54	13.64	0.09	0.35	0.51	0.79
		15	2100	3.55	4.29	4.73	5.16	5.58	6.06	6.53	7.05	8.30	9.46	10.01	10.53	11.13	11.69	12.80	13.86	0.10	0.37	0.53	0.83
			2200	3.64	4.41	4.86	5.30	5.73	6.23	6.71	7.25	8.52	9.70	10.25	10.78	11.38	11.94	13.02	14.02	0.10	0.39	0.56	0.87
			2300	3.73	4.53	4.99	5.44	5.89	6.39	6.89	7.44	8.74	9.93	10.48	11.01	11.61	12.16	13.20	14.14	0.11	0.41	0.58	0.91
			2400	3.82	4.63	5.11	5.58	6.03	6.55	7.06	7.62	8.94	10.14	10.69	11.22	11.81	12.35	13.35	14.20	0.11	0.42	0.61	0.95
			2500	3.90	4.74	5.23	5.70	6.17	6.70	7.21	7.78	9.12	10.33	10.88	11.40	11.98	12.51	13.46	14.21	0.12	0.44	0.64	0.99
			2600	3.98	4.84	5.34	5.83	6.30	6.84	7.37	7.94	9.30	10.51	11.06	11.57	12.13	12.64	13.52		0.12	0.46	0.66	1.02
			2700	4.05	4.93	5.44	5.94	6.43	6.98	7.51	8.09	9.46	10.66	11.21	11.71	12.25	12.73	13.55		0.13	0.48	0.69	1.06
			2800	4.12	5.02	5.54	6.05	6.54	7.10	7.64	8.23	9.60	10.80	11.34	11.82	12.35	12.80	13.53		0.13	0.49	0.71	1.10
			2900	4.19	5.11	5.64	6.15	6.65	7.22	7.77	8.36	9.73	10.92	11.44	11.92	12.42	12.84	13.47		0.14	0.51	0.74	1.14
			3000	4.25	5.19	5.73	6.25	6.76	7.33	7.88	8.48	9.85	11.03	11.53	11.99	12.45	12.84	13.37		0.14	0.53	0.76	1.18
		20	3100	4.31	5.26	5.81	6.34	6.86	7.43	7.99	8.59	9.96	11.11	11.60	12.03					0.15	0.55	0.79	1.22
			3200	4.36	5.33	5.89	6.43	6.95	7.53	8.09	8.69	10.05	11.17	11.64	12.05					0.15	0.56	0.81	1.26
			3300	4.41	5.39	5.96	6.50	7.03	7.62	8.18	8.78	10.13	11.22	11.66	12.04					0.15	0.58	0.84	1.30
			3400	4.46	5.45	6.03	6.58	7.11	7.70	8.26	8.86	10.19	11.24	11.66	12.00					0.16	0.60	0.86	1.34
			3500	4.50	5.51	6.09	6.64	7.17	7.77	8.33	8.93	10.23	11.24	11.63	11.94					0.16	0.62	0.89	1.38
			3600	4.54	5.56	6.14	6.70	7.24	7.83	8.39	8.98	10.26	11.23							0.17	0.63	0.92	1.42
			3700	4.57	5.60	6.19	6.75	7.29	7.88	8.44	9.03	10.28	11.19							0.17	0.65	0.94	1.46
			3800	4.60	5.64	6.24	6.80	7.34	7.93	8.48	9.06	10.28	11.13							0.18	0.67	0.97	1.50
			3900	4.63	5.68	6.27	6.84	7.38	7.96	8.51	9.08	10.26	11.05							0.18	0.69	0.99	1.54
			4000	4.65	5.71	6.31	6.87	7.41	7.99	8.53	9.09	10.23	10.94							0.19	0.71	1.02	1.58
		25	4100	4.67	5.73	6.33	6.90	7.43	8.01	8.54	9.09	10.18								0.19	0.72	1.04	1.62
			4200	4.68	5.75	6.35	6.92	7.45	8.02	8.55	9.08	10.11								0.20	0.74	1.07	1.65
			4300	4.69	5.77	6.37	6.93	7.46	8.02	8.54	9.06	10.02								0.20	0.76	1.09	1.69
			4400	4.70	5.78	6.38	6.94	7.46	8.02	8.52	9.02	9.92								0.21	0.78	1.12	1.73
			4500	4.70	5.78	6.38	6.93	7.45	8.00	8.49	8.97	9.80								0.21	0.79	1.14	1.77
			4600	4.70	5.78	6.37	6.93	7.44	7.97	8.45										0.22	0.81	1.17	1.81
			4700	4.69	5.77	6.36	6.91	7.41	7.94	8.39										0.22	0.83	1.19	1.85
			4800	4.68	5.76	6.35	6.89	7.38	7.89	8.33										0.22	0.85	1.22	1.89
			4900	4.66	5.74	6.32	6.86	7.34	7.84	8.26										0.23	0.86	1.25	1.93
			5000	4.64	5.72	6.29	6.82	7.29	7.77	8.17										0.23	0.88	1.27	1.97
																			Where v > 30 m/s, please consult our Applications Engineering Department				
																			v (m/s)				
																			Pulleys				
																			Dynamically balanced (for details see DIN 2211)				

Where v > 30 m/s,
please consult our
Applications Engineering
Department

optibelt *SUPER TX* M=5 Section CX/X22

Nominal Power Rating P_N (kW) for $\beta = 180^\circ$ and $L_d = 3808$ mm



Pulleys	v (m/s)	n_k (min ⁻¹)	Datum diameter of small pulley d_{dk} (mm)																Additional power (kW) per belt for speed ratio i			
			140	150	160	180	200	224	250	280	315	335	355	400	450	500	630	1.01	1.06	1.27	> 1.57	
																		to 1.05	to 1.26	to 1.57		
Statically balanced	5	700	4.81	5.29	5.76	6.69	7.59	8.65	9.77	11.03	12.45	13.24	14.02	15.70	17.48	19.17	23.07	0.06	0.23	0.33	0.52	
		950	6.07	6.68	7.28	8.46	9.61	10.94	12.34	13.89	15.62	16.58	17.50	19.46	21.47	23.28	26.99	0.08	0.32	0.45	0.70	
		1450	8.23	9.07	9.89	11.49	13.01	14.76	16.54	18.44	20.47	21.52	22.50	24.39	25.99	27.00	26.57	0.13	0.48	0.69	1.07	
		2850	12.16	13.34	14.45	16.45	18.14	19.73	20.88	21.39	20.80							0.25	0.95	1.36	2.11	
		50	0.54	0.59	0.64	0.74	0.83	0.94	1.06	1.20	1.35	1.44	1.53	1.72	1.94	2.15	2.69	0.00	0.02	0.02	0.04	
		100	0.98	1.07	1.16	1.34	1.51	1.72	1.94	2.19	2.47	2.63	2.79	3.15	3.54	3.93	4.90	0.01	0.03	0.05	0.07	
		150	1.38	1.51	1.64	1.89	2.14	2.43	2.74	3.09	3.50	3.73	3.96	4.46	5.01	5.56	6.93	0.01	0.05	0.07	0.11	
		200	1.76	1.92	2.08	2.41	2.72	3.10	3.50	3.95	4.47	4.76	5.06	5.70	6.40	7.09	8.83	0.02	0.07	0.10	0.15	
		250	2.11	2.31	2.51	2.90	3.28	3.74	4.22	4.77	5.40	5.75	6.10	6.88	7.72	8.55	10.62	0.02	0.08	0.12	0.19	
		300	2.45	2.69	2.92	3.37	3.82	4.35	4.91	5.55	6.29	6.70	7.10	8.00	8.98	9.94	12.33	0.03	0.10	0.14	0.22	
		350	2.78	3.05	3.31	3.83	4.34	4.94	5.59	6.31	7.14	7.61	8.07	9.09	10.19	11.27	13.95	0.03	0.12	0.17	0.26	
		400	3.10	3.39	3.69	4.27	4.84	5.52	6.23	7.05	7.97	8.49	9.00	10.14	11.36	12.55	15.49	0.04	0.13	0.19	0.30	
		450	3.40	3.73	4.06	4.70	5.33	6.08	6.86	7.76	8.77	9.34	9.91	11.15	12.48	13.78	16.96	0.04	0.15	0.22	0.33	
		500	3.70	4.06	4.42	5.12	5.81	6.62	7.48	8.45	9.55	10.17	10.78	12.12	13.56	14.95	18.34	0.04	0.17	0.24	0.37	
		550	3.99	4.38	4.76	5.52	6.27	7.15	8.07	9.12	10.31	10.97	11.63	13.07	14.60	16.08	19.65	0.05	0.18	0.26	0.41	
		600	4.27	4.69	5.10	5.92	6.72	7.66	8.65	9.77	11.04	11.75	12.45	13.98	15.60	17.16	20.87	0.05	0.20	0.29	0.44	
		650	4.55	4.99	5.44	6.31	7.16	8.16	9.22	10.41	11.76	12.51	13.25	14.86	16.56	18.19	22.02	0.06	0.22	0.31	0.48	
		700	4.81	5.29	5.76	6.69	7.59	8.65	9.77	11.03	12.45	13.24	14.02	15.70	17.48	19.17	23.07	0.06	0.23	0.33	0.52	
		750	5.08	5.58	6.08	7.06	8.01	9.13	10.31	11.64	13.13	13.95	14.76	16.52	18.36	20.10	24.04	0.07	0.25	0.36	0.56	
		800	5.33	5.86	6.39	7.42	8.42	9.60	10.84	12.22	13.78	14.64	15.48	17.30	19.20	20.97	24.93	0.07	0.27			

Power Ratings

optibelt VB section 5 – raw edge – moulded cogged

Nominal Power Rating P_N (kW) for $\beta = 180^\circ$ and $L_d = 312$ mm



Table 45

Pulleys	v (m/s)	n_k (min ⁻¹)	Datum diameter of small pulley d_{dk} (mm)									Additional power (kW) per belt for speed ratio i				
			16	18	20	22.4	25	28	31.5	33.5	40	45	1.01 to 1.05	1.06 to 1.26	1.27 > 1.57 to 1.57	
Statically balanced	②	700	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.06	0.07	0.08	0.000	0.001	0.002	0.003
		950	0.02	0.03	0.04	0.04	0.05	0.06	0.07	0.07	0.09	0.10	0.000	0.002	0.002	0.004
		1450	0.03	0.04	0.05	0.06	0.07	0.08	0.10	0.11	0.13	0.15	0.001	0.002	0.004	0.005
		2850	0.06	0.07	0.09	0.11	0.13	0.15	0.18	0.19	0.24	0.28	0.001	0.005	0.007	0.011
		200	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.03	0.000	0.000	0.000	0.001
		300	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.000	0.001	0.001	0.001
		400	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.04	0.05	0.000	0.001	0.001	0.001
		500	0.01	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.06	0.000	0.001	0.001	0.002
		600	0.02	0.02	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.07	0.000	0.001	0.001	0.002
		700	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.06	0.07	0.08	0.000	0.001	0.002	0.003
		800	0.02	0.03	0.03	0.04	0.04	0.05	0.06	0.06	0.08	0.09	0.000	0.001	0.002	0.003
		900	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.09	0.10	0.000	0.002	0.002	0.003
		1000	0.03	0.03	0.04	0.04	0.05	0.06	0.07	0.08	0.10	0.11	0.000	0.002	0.002	0.004
		1100	0.03	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.10	0.12	0.000	0.002	0.003	0.004
		1200	0.03	0.04	0.04	0.05	0.06	0.07	0.08	0.09	0.11	0.13	0.001	0.002	0.003	0.004
		1300	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.12	0.14	0.001	0.002	0.003	0.005
		1400	0.03	0.04	0.05	0.06	0.07	0.08	0.10	0.10	0.13	0.15	0.001	0.002	0.003	0.005
		1500	0.03	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.14	0.16	0.001	0.003	0.004	0.006
		1600	0.04	0.05	0.06	0.07	0.08	0.09	0.11	0.12	0.14	0.17	0.001	0.003	0.004	0.006
		1700	0.04	0.05	0.06	0.07	0.08	0.10	0.11	0.12	0.15	0.18	0.001	0.003	0.004	0.006
		1800	0.04	0.05	0.06	0.07	0.09	0.10	0.12	0.13	0.16	0.18	0.001	0.003	0.004	0.007
		1900	0.04	0.05	0.06	0.08	0.09	0.11	0.12	0.13	0.17	0.19	0.001	0.003	0.005	0.007
		2000	0.04	0.06	0.07	0.08	0.09	0.11	0.13	0.14	0.18	0.20	0.001	0.003	0.005	0.007
		2100	0.05	0.06	0.07	0.08	0.10	0.12	0.14	0.15	0.18	0.21	0.001	0.004	0.005	0.008
		2200	0.05	0.06	0.07	0.09	0.10	0.12	0.14	0.15	0.19	0.22	0.001	0.004	0.005	0.008
		2300	0.05	0.06	0.07	0.09	0.11	0.13	0.15	0.16	0.20	0.23	0.001	0.004	0.006	0.009
		2400	0.05	0.06	0.08	0.09	0.11	0.13	0.15	0.17	0.21	0.24	0.001	0.004	0.006	0.009
		2500	0.05	0.07	0.08	0.10	0.11	0.13	0.16	0.17	0.21	0.25	0.001	0.004	0.006	0.009
		2600	0.05	0.07	0.08	0.10	0.12	0.14	0.16	0.18	0.22	0.25	0.001	0.004	0.006	0.010
		2700	0.06	0.07	0.09	0.10	0.12	0.14	0.17	0.18	0.23	0.26	0.001	0.005	0.007	0.010
		2800	0.06	0.07	0.09	0.11	0.13	0.15	0.17	0.19	0.24	0.27	0.001	0.005	0.007	0.010
		2900	0.06	0.07	0.09	0.11	0.13	0.15	0.18	0.19	0.24	0.28	0.001	0.005	0.007	0.011
		3000	0.06	0.08	0.09	0.11	0.13	0.16	0.19	0.20	0.25	0.29	0.001	0.005	0.007	0.011
		3100	0.06	0.08	0.10	0.12	0.14	0.16	0.19	0.21	0.26	0.30	0.001	0.005	0.007	0.012
		3200	0.06	0.08	0.10	0.12	0.14	0.17	0.20	0.21	0.27	0.31	0.001	0.005	0.008	0.012
		3300	0.06	0.08	0.10	0.12	0.14	0.17	0.20	0.22	0.27	0.31	0.001	0.006	0.008	0.012
		3400	0.07	0.08	0.10	0.13	0.15	0.18	0.21	0.22	0.28	0.32	0.002	0.006	0.008	0.013
		3500	0.07	0.09	0.11	0.13	0.15	0.18	0.21	0.23	0.29	0.33	0.002	0.006	0.008	0.013
		3600	0.07	0.09	0.11	0.13	0.16	0.18	0.22	0.24	0.29	0.34	0.002	0.006	0.009	0.013
		3700	0.07	0.09	0.11	0.13	0.16	0.19	0.22	0.24	0.30	0.35	0.002	0.006	0.009	0.014
		3800	0.07	0.09	0.11	0.14	0.16	0.19	0.23	0.25	0.31	0.36	0.002	0.006	0.009	0.014
		3900	0.07	0.09	0.12	0.14	0.17	0.20	0.23	0.25	0.32	0.36	0.002	0.007	0.009	0.015
		4000	0.07	0.10	0.12	0.14	0.17	0.20	0.24	0.26	0.32	0.37	0.002	0.007	0.010	0.015
		4100	0.08	0.10	0.12	0.15	0.17	0.21	0.24	0.26	0.33	0.38	0.002	0.007	0.010	0.015
		4200	0.08	0.10	0.12	0.15	0.18	0.21	0.25	0.27	0.34	0.39	0.002	0.007	0.010	0.016
		4300	0.08	0.10	0.13	0.15	0.18	0.21	0.25	0.27	0.34	0.40	0.002	0.007	0.010	0.016
		4400	0.08	0.10	0.13	0.16	0.18	0.22	0.26	0.28	0.35	0.40	0.002	0.007	0.011	0.016
		4500	0.08	0.11	0.13	0.16	0.19	0.22	0.26	0.28	0.36	0.41	0.002	0.008	0.011	0.017
		4600	0.08	0.11	0.13	0.16	0.19	0.23	0.27	0.29	0.36	0.42	0.002	0.008	0.011	0.017
		4700	0.08	0.11	0.13	0.16	0.20	0.23	0.27	0.30	0.37	0.43	0.002	0.008	0.011	0.018
		4800	0.09	0.11	0.14	0.17	0.20	0.24	0.28	0.30	0.38	0.44	0.002	0.008	0.012	0.018
		4900	0.09	0.11	0.14	0.17	0.20	0.24	0.28	0.31	0.38	0.44	0.002	0.008	0.012	0.018
		5000	0.09	0.12	0.14	0.17	0.21	0.24	0.29	0.31	0.39	0.45	0.002	0.008	0.012	0.019
		5100	0.09	0.12	0.14	0.18	0.21	0.25	0.29	0.32	0.40	0.46	0.002	0.009	0.012	0.019
		5200	0.09	0.12	0.15	0.18	0.21	0.25	0.30	0.32	0.40	0.47	0.002	0.009	0.013	0.019
		5300	0.09	0.12	0.15	0.18	0.22	0.26	0.30	0.33	0.41	0.47	0.002	0.009	0.013	0.020
		5400	0.09	0.12	0.15	0.18	0.22	0.26	0.31	0.33	0.42	0.48	0.002	0.009	0.013	0.020
		5500	0.10	0.12	0.15	0.19	0.22	0.26	0.31	0.34	0.42	0.49	0.002	0.009	0.013	0.021
		5600	0.10	0.13	0.16	0.19	0.23	0.27	0.32	0.34	0.43	0.50	0.002	0.009	0.014	0.021
		5700	0.10	0.13	0.16	0.19	0.23	0.27	0.32	0.35	0.44	0.50	0.003	0.010	0.014	0.021
		5800	0.10	0.13	0.16	0.19	0.23	0.28	0.33	0.35	0.44	0.51	0.003	0.010	0.014	0.022
		5900	0.10	0.13	0.16	0.20	0.24	0.28	0.33	0.36	0.45	0.52	0.003	0.010	0.014	0.022
		6000	0.10	0.13	0.16	0.20	0.24	0.28	0.34	0.36	0.46	0.53	0.003	0.010	0.015	0.022
⑩												v (m/s)				
Statically balanced												Pulleys				

Power Ratings

optibelt VB section Y/6 – raw edge – moulded cogged

Nominal Power Rating P_N (kW) for $\beta = 180^\circ$ and $L_d = 315$ mm



Table 46

Pulleys	v (m/s)	n_k (min ⁻¹)	Datum diameter of small pulley d_{dk} (mm)								Additional power (kW) per belt for speed ratio i				
			20	22.4	25	28	31.5	35.5	40	45	50	56	1.01 to 1.05	1.06 to 1.26	1.27 > 1.57 to 1.57
Statically balanced	②	700	0.03	0.03	0.04	0.05	0.06	0.08	0.09	0.11	0.12	0.14	0.001	0.003	0.005 0.008
		950	0.03	0.04	0.05	0.07	0.08	0.10	0.12	0.14	0.16	0.18	0.001	0.005	0.007 0.011
		1450	0.05	0.06	0.08	0.10	0.12	0.15	0.17	0.20	0.24	0.27	0.002	0.007	0.010 0.016
		2850	0.08	0.11	0.14	0.18	0.22	0.27	0.32	0.38	0.43	0.50	0.004	0.014	0.020 0.032
		200	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.000	0.001	0.001 0.002
		300	0.01	0.02	0.02	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.000	0.001	0.002 0.003
		400	0.02	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.07	0.08	0.001	0.002	0.003 0.004
		500	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.001	0.002	0.004 0.006
		600	0.02	0.03	0.04	0.04	0.05	0.07	0.08	0.09	0.10	0.12	0.001	0.003	0.004 0.007
		700	0.03	0.03	0.04	0.05	0.06	0.08	0.09	0.11	0.12	0.14	0.001	0.003	0.005 0.008
		800	0.03	0.04	0.05	0.06	0.07	0.08	0.10	0.12	0.14	0.16	0.001	0.004	0.006 0.009
		900	0.03	0.04	0.05	0.06	0.08	0.09	0.11	0.13	0.15	0.18	0.001	0.004	0.006 0.010
		1000	0.03	0.04	0.06	0.07	0.09	0.10	0.12	0.15	0.17	0.19	0.001	0.005	0.007 0.011
		1100	0.04	0.05	0.06	0.08	0.09	0.11	0.14	0.16	0.18	0.21	0.001	0.005	0.008 0.012
		1200	0.04	0.05	0.07	0.08	0.10	0.12	0.15	0.17	0.20	0.23	0.002	0.006	0.009 0.013
		1300	0.04	0.06	0.07	0.09	0.11	0.13	0.16	0.19	0.21	0.25	0.002	0.006	0.009 0.014
		1400	0.04	0.06	0.08	0.09	0.12	0.14	0.17	0.20	0.23	0.26	0.002	0.007	0.010 0.016
		1500	0.05	0.06	0.08	0.10	0.12	0.15	0.18	0.21	0.24	0.28	0.002	0.007	0.011 0.017
		1600	0.05	0.07	0.09	0.11	0.13	0.16	0.19	0.22	0.26	0.30	0.002	0.008	0.011 0.018
		1700	0.05	0.07	0.09	0.11	0.14	0.17	0.20	0.24	0.27	0.31	0.002	0.008	0.012 0.019
		1800	0.05	0.07	0.09	0.12	0.15	0.18	0.21	0.25	0.29	0.33	0.002	0.009	0.013 0.020
		1900	0.06	0.08	0.10	0.12	0.15	0.19	0.22	0.26	0.30	0.35	0.003	0.009	0.014 0.021
		2000	0.06	0.08	0.10	0.13	0.16	0.19	0.23	0.27	0.32	0.36	0.003	0.010	0.014 0.022
		2100	0.06	0.08	0.11	0.14	0.17	0.20	0.24	0.29	0.33	0.38	0.003	0.010	0.015 0.023
		2200	0.06	0.09	0.11	0.14	0.17	0.21	0.25	0.30	0.34	0.40	0.003	0.011	0.016 0.024
		2300	0.07	0.09	0.12	0.15	0.18	0.22	0.26	0.31	0.36	0.41	0.003	0.011	0.016 0.026
		2400	0.07	0.09	0.12	0.15	0.19	0.23	0.27	0.32	0.37	0.43	0.003	0.012	0.017 0.027
		2500	0.07	0.10	0.13	0.16	0.19	0.24	0.28	0.33	0.38	0.44	0.003	0.012	0.018 0.028
		2600	0.07	0.10	0.13	0.16	0.20	0.24	0.29	0.35	0.40	0.46	0.003	0.013	0.019 0.029
		2700	0.08	0.10	0.13	0.17	0.21	0.25	0.30	0.36	0.41	0.48	0.004	0.013	0.019 0.030
		2800	0.08	0.11	0.14	0.17	0.22	0.26	0.31	0.37	0.43	0.49	0.004	0.014	0.020 0.031
		2900	0.08	0.11	0.14	0.18	0.22	0.27	0.32	0.38	0.44	0.51	0.004	0.014	0.021 0.032
		3000	0.08	0.11	0.15	0.18	0.23	0.28	0.33	0.39	0.45	0.52	0.004	0.015	0.021 0.033
		3100	0.09	0.12	0.15	0.19	0.24	0.29	0.34	0.40	0.47	0.54	0.004	0.015	0.022 0.034
		3200	0.09	0.12	0.16	0.20	0.24	0.29	0.35	0.42	0.48	0.55	0.004	0.016	0.023 0.036
		3300	0.09	0.12	0.16	0.20	0.25	0.30	0.36	0.43	0.49	0.57	0.004	0.016	0.024 0.037
		3400	0.09	0.13	0.16	0.21	0.25	0.31	0.37	0.44	0.50	0.58	0.004	0.017	0.024 0.038
		3500	0.09	0.13	0.17	0.21	0.26	0.32	0.38	0.45	0.52	0.60	0.005	0.017	0.025 0.039
		3600	0.10	0.13	0.17	0.22	0.27	0.33	0.39	0.46	0.53	0.61	0.005	0.018	0.026 0.040
		3700	0.10	0.14	0.18	0.22	0.27	0.33	0.40	0.47	0.54	0.62	0.005	0.018	0.026 0.041
		3800	0.10	0.14	0.18	0.23	0.28	0.34	0.41	0.48	0.55	0.64	0.005	0.019	0.027 0.042
		3900	0.10	0.14	0.18	0.23	0.29	0.35	0.42	0.49	0.57	0.65	0.005	0.019	0.028 0.043
		4000	0.10	0.14	0.19	0.24	0.29	0.36	0.43	0.50	0.58	0.67	0.005	0.020	0.029 0.044
		4100	0.11	0.15	0.19	0.24	0.30	0.36	0.44	0.51	0.59	0.68	0.005	0.020	0.029 0.045
		4200	0.11	0.15	0.19	0.25	0.31	0.37	0.44	0.52	0.60	0.69	0.006	0.021	0.030 0.047
		4300	0.11	0.15	0.20	0.25	0.31	0.38	0.45	0.54	0.61	0.71	0.006	0.021	0.031 0.048
		4400	0.11	0.16	0.20	0.26	0.32	0.39	0.46	0.55	0.63	0.72	0.006	0.022	0.031 0.049
		4500	0.11	0.16	0.21	0.26	0.32	0.39	0.47	0.56	0.64	0.73	0.006	0.022	0.032 0.050
		4600	0.12	0.16	0.21	0.27	0.33	0.40	0.48	0.57	0.65	0.75	0.006	0.023	0.033 0.051
		4700	0.12	0.16	0.21	0.27	0.34	0.41	0.49	0.58	0.66	0.76	0.006	0.023	0.034 0.052
		4800	0.12	0.17	0.22	0.28	0.34	0.42	0.50	0.59	0.67	0.77	0.006	0.024	0.034 0.053
		4900	0.12	0.17	0.22	0.28	0.35	0.42	0.51	0.60	0.68	0.79	0.006	0.024	0.035 0.054
		5000	0.12	0.17	0.22	0.28	0.35	0.43	0.51	0.61	0.70	0.80	0.007	0.025	0.036 0.055
		5100	0.12	0.17	0.23	0.29	0.36	0.44	0.52	0.62	0.71	0.81	0.007	0.025	0.037 0.057
		5200	0.13	0.18	0.23	0.29	0.36	0.44	0.53	0.63	0.72	0.82	0.007	0.026	0.037 0.058
		5300	0.13	0.18	0.24	0.30	0.37	0.45	0.54	0.64	0.73	0.84	0.007	0.026	0.038 0.059
		5400	0.13	0.18	0.24	0.30	0.38	0.46	0.55	0.65	0.74	0.85	0.007	0.027	0.039 0.060
		5500	0.13	0.19	0.24	0.31	0.38	0.47	0.56	0.65	0.75	0.86	0.007	0.027	0.039 0.061
		5600	0.13	0.19	0.25	0.31	0.39	0.47	0.56	0.66	0.76	0.87	0.007	0.028	0.040 0.062
		5700	0.14	0.19	0.25	0.32	0.39	0.48	0.57	0.67	0.77	0.88	0.008	0.028	0.041 0.063
		5800	0.14	0.19	0.25	0.32	0.40	0.49	0.58	0.68	0.78	0.89	0.008	0.029	0.042 0.064
		5900	0.14	0.20	0.26	0.33	0.40	0.49	0.59	0.69	0.79	0.90	0.008	0.029	0.042 0.065
		6000	0.14	0.20	0.26	0.33	0.41	0.50	0.60	0.70	0.80	0.91	0.008	0.030	0.043 0.067
Statically balanced												v (m/s)			
Pulleys															

Power Ratings

optibelt VB section 8

Nominal Power Rating P_N (kW) for β = 180° and L_d = 579 mm



Table 47

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)								Additional power (kW) per belt for speed ratio i				
			35	40	45	50	56	63	71	80	90	1.01 to 1.05	1.06 to 1.26	1.27 > 1.57 to 1.57	
Statically balanced	2	700	0.12	0.15	0.18	0.21	0.25	0.29	0.34	0.39	0.45	0.00	0.01	0.01	
		950	0.15	0.19	0.23	0.27	0.32	0.37	0.43	0.50	0.57	0.00	0.01	0.02	
		1450	0.19	0.25	0.31	0.37	0.43	0.51	0.59	0.69	0.79	0.00	0.02	0.03	
		2850	0.28	0.38	0.48	0.57	0.69	0.81	0.95	1.11	1.27	0.01	0.03	0.05	
		100	0.03	0.03	0.04	0.04	0.05	0.06	0.07	0.08	0.09	0.00	0.00	0.00	
		200	0.05	0.06	0.07	0.08	0.09	0.11	0.12	0.14	0.16	0.00	0.00	0.00	
		300	0.06	0.08	0.09	0.11	0.13	0.15	0.17	0.20	0.23	0.00	0.00	0.01	
		400	0.08	0.10	0.12	0.14	0.16	0.19	0.22	0.25	0.28	0.00	0.00	0.01	
		500	0.09	0.12	0.14	0.16	0.19	0.22	0.26	0.30	0.34	0.00	0.01	0.01	
		600	0.11	0.13	0.16	0.19	0.22	0.26	0.30	0.35	0.40	0.00	0.01	0.01	
		700	0.12	0.15	0.18	0.21	0.25	0.29	0.34	0.39	0.45	0.00	0.01	0.01	
		800	0.13	0.17	0.20	0.24	0.28	0.32	0.38	0.43	0.50	0.00	0.01	0.01	
		900	0.14	0.18	0.22	0.26	0.30	0.35	0.41	0.48	0.55	0.00	0.01	0.02	
		1000	0.15	0.19	0.24	0.28	0.33	0.38	0.45	0.52	0.59	0.00	0.01	0.02	
		1100	0.16	0.21	0.25	0.30	0.35	0.41	0.48	0.56	0.64	0.00	0.01	0.02	
		1200	0.17	0.22	0.27	0.32	0.38	0.44	0.51	0.59	0.68	0.00	0.01	0.02	
		1300	0.18	0.23	0.29	0.34	0.40	0.47	0.55	0.63	0.72	0.00	0.02	0.03	
		1400	0.19	0.24	0.30	0.36	0.42	0.49	0.58	0.67	0.77	0.00	0.02	0.03	
		1500	0.20	0.26	0.32	0.37	0.44	0.52	0.61	0.70	0.81	0.00	0.02	0.03	
		1600	0.20	0.27	0.33	0.39	0.46	0.55	0.64	0.74	0.85	0.00	0.02	0.03	
		1700	0.21	0.28	0.34	0.41	0.48	0.57	0.67	0.77	0.88	0.00	0.02	0.03	
		1800	0.22	0.29	0.36	0.42	0.50	0.59	0.69	0.80	0.92	0.00	0.02	0.03	
		1900	0.22	0.30	0.37	0.44	0.52	0.62	0.72	0.84	0.96	0.00	0.02	0.04	
		2000	0.23	0.31	0.38	0.46	0.54	0.64	0.75	0.87	0.99	0.00	0.02	0.04	
		2100	0.24	0.32	0.40	0.47	0.56	0.66	0.77	0.90	1.03	0.00	0.02	0.04	
		2200	0.24	0.33	0.41	0.49	0.58	0.68	0.80	0.93	1.06	0.01	0.03	0.04	
		2300	0.25	0.34	0.42	0.50	0.60	0.70	0.83	0.96	1.10	0.01	0.03	0.04	
		2400	0.25	0.34	0.43	0.51	0.61	0.73	0.85	0.98	1.13	0.01	0.03	0.04	
		2500	0.26	0.35	0.44	0.53	0.63	0.75	0.87	1.01	1.16	0.01	0.03	0.05	
		2600	0.27	0.36	0.45	0.54	0.65	0.77	0.90	1.04	1.19	0.01	0.03	0.05	
		2700	0.27	0.37	0.46	0.56	0.66	0.79	0.92	1.07	1.22	0.01	0.03	0.05	
		2800	0.27	0.38	0.47	0.57	0.68	0.80	0.94	1.09	1.25	0.01	0.03	0.05	
		2900	0.28	0.38	0.48	0.58	0.69	0.82	0.96	1.12	1.28	0.01	0.03	0.05	
		3000	0.28	0.39	0.49	0.59	0.71	0.84	0.99	1.14	1.31	0.01	0.03	0.06	
		3100	0.29	0.40	0.50	0.60	0.72	0.86	1.01	1.17	1.34	0.01	0.04	0.06	
		3200	0.29	0.40	0.51	0.62	0.74	0.88	1.03	1.19	1.36	0.01	0.04	0.06	
		3300	0.30	0.41	0.52	0.63	0.75	0.89	1.05	1.21	1.39	0.01	0.04	0.06	
		3400	0.30	0.42	0.53	0.64	0.77	0.91	1.07	1.24	1.41	0.01	0.04	0.06	
		3500	0.30	0.42	0.54	0.65	0.78	0.93	1.09	1.26	1.44	0.01	0.04	0.06	
		3600	0.31	0.43	0.55	0.66	0.79	0.94	1.10	1.28	1.46	0.01	0.04	0.07	
		3700	0.31	0.43	0.55	0.67	0.81	0.96	1.12	1.30	1.49	0.01	0.04	0.07	
		3800	0.31	0.44	0.56	0.68	0.82	0.97	1.14	1.32	1.51	0.01	0.04	0.07	
		3900	0.31	0.44	0.57	0.69	0.83	0.99	1.16	1.34	1.53	0.01	0.05	0.07	
		4000	0.32	0.45	0.58	0.70	0.84	1.00	1.17	1.36	1.55	0.01	0.05	0.07	
		4100	0.32	0.45	0.58	0.71	0.85	1.02	1.19	1.38	1.57	0.01	0.05	0.08	
		4200	0.32	0.46	0.59	0.72	0.86	1.03	1.21	1.40	1.59	0.01	0.05	0.08	
		4300	0.32	0.46	0.60	0.73	0.88	1.04	1.22	1.41	1.61	0.01	0.05	0.08	
		4400	0.33	0.47	0.60	0.73	0.89	1.06	1.24	1.43	1.63	0.01	0.05	0.08	
		4500	0.33	0.47	0.61	0.74	0.90	1.07	1.25	1.45	1.65	0.01	0.05	0.08	
		4600	0.33	0.48	0.62	0.75	0.91	1.08	1.27	1.46	1.66	0.01	0.05	0.09	
		4700	0.33	0.48	0.62	0.76	0.92	1.09	1.28	1.48	1.68	0.01	0.05	0.09	
		4800	0.33	0.48	0.63	0.77	0.93	1.10	1.29	1.49	1.69	0.01	0.06	0.09	
		4900	0.33	0.49	0.63	0.77	0.94	1.11	1.31	1.51	1.71	0.01	0.06	0.09	
		5000	0.34	0.49	0.64	0.78	0.94	1.13	1.32	1.52	1.72	0.01	0.06	0.09	
Dynamically balanced	10	5100	0.34	0.49	0.64	0.79	0.95	1.14	1.33	1.53	1.74	0.01	0.06	0.09	
		5200	0.34	0.50	0.65	0.79	0.96	1.15	1.34	1.55	1.75	0.01	0.06	0.10	
		5300	0.34	0.50	0.65	0.80	0.97	1.16	1.35	1.56	1.76	0.01	0.06	0.10	
		5400	0.34	0.50	0.66	0.81	0.98	1.17	1.36	1.57	1.77	0.01	0.06	0.10	
		5500	0.34	0.51	0.66	0.81	0.99	1.17	1.38	1.58	1.78	0.01	0.06	0.10	
		5600	0.34	0.51	0.67	0.82	0.99	1.18	1.38	1.59	1.79	0.01	0.06	0.10	
		5700	0.34	0.51	0.67	0.83	1.00	1.19	1.39	1.60	1.80	0.01	0.07	0.11	
		5800	0.34	0.51	0.68	0.83	1.01	1.20	1.40	1.61	1.81	0.01	0.07	0.11	
		5900	0.34	0.51	0.68	0.84	1.01	1.21	1.41	1.62	1.82	0.01	0.07	0.11	
		6000	0.34	0.52	0.68	0.84	1.02	1.22	1.42	1.63	1.82	0.01	0.07	0.11	
		6200	0.34	0.52	0.69	0.85	1.03	1.23	1.43	1.64	1.83	0.01	0.07	0.11	
		6400	0.34	0.52	0.69	0.86	1.04	1.24	1.45	1.65	1.84	0.01	0.07	0.12	
		6600	0.34	0.52	0.70	0.87	1.05	1.25	1.46	1.66	1.84	0.02	0.08	0.12	
		6800	0.34	0.53	0.70	0.87	1.06	1.26	1.47	1.67	1.84	0.02	0.08	0.13	
		7000	0.34	0.53	0.71	0.88	1.07	1.27	1.48	1.67	1.84	0.02	0.08	0.13	
		7200	0.33	0.53	0.71	0.88	1.07	1.28	1.48	1.67	1.84	0.02	0.08	0.13	
		7400	0.33	0.53	0.71	0.89	1.08	1.28	1.48	1.67	1.83	0.02	0.09	0.14	
		7600	0.33	0.53	0.72	0.89	1.08	1.29	1.49	1.67	1.81	0.02	0.09	0.14	
		7800	0.32	0.53	0.72	0.89	1.09	1.29	1.49	1.66	1.80	0.02	0.09	0.14	
		8000	0.32	0.52	0.72	0.89	1.09	1.29	1.48	1.65	1.78	0.02	0.09	0.15	
											v (m/s)				
											Pulleys				

Where v > 30 m/s, please consult our Applications Engineering Department

Power Ratings

optibelt VB section Z/10

Nominal Power Rating P_N (kW) for β = 180° and L_d = 822 mm



Table 48

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)								Additional power (kW) per belt for speed ratio i				
			45	50	56	63	71	80	90	100	112	1.01 to 1.05	1.06 to 1.26	1.27 > 1.57 to 1.57	
Statically balanced	②	700	0.18	0.22	0.28	0.34	0.42	0.50	0.59	0.67	0.77	0.00	0.02	0.03	0.03
		950	0.22	0.28	0.35	0.44	0.53	0.64	0.75	0.86	1.00	0.00	0.02	0.04	0.04
		1450	0.29	0.38	0.48	0.60	0.74	0.89	1.06	1.22	1.40	0.01	0.03	0.06	0.06
		2850	0.42	0.58	0.77	0.98	1.22	1.47	1.75	2.02	2.33	0.01	0.07	0.11	0.12
		100	0.04	0.05	0.06	0.07	0.08	0.10	0.11	0.13	0.15	0.00	0.00	0.00	0.00
		200	0.07	0.08	0.10	0.12	0.15	0.17	0.20	0.23	0.27	0.00	0.00	0.01	0.01
		300	0.09	0.12	0.14	0.17	0.21	0.25	0.29	0.33	0.38	0.00	0.01	0.01	0.01
		400	0.12	0.15	0.18	0.22	0.26	0.31	0.37	0.42	0.48	0.00	0.01	0.02	0.02
		500	0.14	0.17	0.21	0.26	0.32	0.38	0.44	0.51	0.58	0.00	0.01	0.02	0.02
		600	0.16	0.20	0.25	0.30	0.37	0.44	0.51	0.59	0.68	0.00	0.01	0.02	0.03
		700	0.18	0.22	0.28	0.34	0.42	0.50	0.59	0.67	0.77	0.00	0.02	0.03	0.03
		800	0.19	0.25	0.31	0.38	0.46	0.55	0.65	0.75	0.87	0.00	0.02	0.03	0.03
		900	0.21	0.27	0.34	0.42	0.51	0.61	0.72	0.83	0.95	0.00	0.02	0.03	0.04
		1000	0.23	0.29	0.37	0.45	0.55	0.66	0.78	0.90	1.04	0.00	0.02	0.04	0.04
		1100	0.24	0.31	0.39	0.49	0.60	0.72	0.85	0.97	1.12	0.01	0.03	0.04	0.05
		1200	0.25	0.33	0.42	0.52	0.64	0.77	0.91	1.05	1.21	0.01	0.03	0.05	0.05
		1300	0.27	0.35	0.45	0.56	0.68	0.82	0.97	1.11	1.29	0.01	0.03	0.05	0.06
		1400	0.28	0.37	0.47	0.59	0.72	0.87	1.03	1.18	1.37	0.01	0.03	0.05	0.06
		1500	0.29	0.39	0.49	0.62	0.76	0.91	1.08	1.25	1.44	0.01	0.04	0.06	0.06
		1600	0.31	0.40	0.52	0.65	0.80	0.96	1.14	1.31	1.52	0.01	0.04	0.06	0.07
		1700	0.32	0.42	0.54	0.68	0.84	1.01	1.19	1.38	1.59	0.01	0.04	0.07	0.07
		1800	0.33	0.44	0.56	0.71	0.87	1.05	1.25	1.44	1.66	0.01	0.04	0.07	0.08
		1900	0.34	0.45	0.59	0.74	0.91	1.10	1.30	1.50	1.73	0.01	0.05	0.07	0.08
		2000	0.35	0.47	0.61	0.77	0.94	1.14	1.35	1.56	1.80	0.01	0.05	0.08	0.09
		2100	0.36	0.48	0.63	0.79	0.98	1.18	1.40	1.62	1.87	0.01	0.05	0.08	0.09
		2200	0.37	0.50	0.65	0.82	1.01	1.22	1.45	1.68	1.94	0.01	0.05	0.08	0.10
		2300	0.38	0.51	0.67	0.85	1.05	1.26	1.50	1.73	2.00	0.01	0.06	0.09	0.10
		2400	0.39	0.52	0.69	0.87	1.08	1.30	1.55	1.79	2.06	0.01	0.06	0.09	0.10
		2500	0.39	0.54	0.70	0.90	1.11	1.34	1.60	1.84	2.12	0.01	0.06	0.10	0.11
		2600	0.40	0.55	0.72	0.92	1.14	1.38	1.64	1.89	2.18	0.01	0.06	0.10	0.11
		2700	0.41	0.56	0.74	0.94	1.17	1.42	1.69	1.94	2.24	0.01	0.06	0.10	0.12
		2800	0.42	0.57	0.76	0.97	1.20	1.46	1.73	1.99	2.30	0.01	0.07	0.11	0.12
		2900	0.42	0.59	0.77	0.99	1.23	1.49	1.77	2.04	2.35	0.01	0.07	0.11	0.13
		3000	0.43	0.60	0.79	1.01	1.26	1.53	1.81	2.09	2.41	0.01	0.07	0.12	0.13
		3100	0.44	0.61	0.81	1.03	1.29	1.56	1.85	2.14	2.46	0.01	0.07	0.12	0.13
		3200	0.44	0.62	0.82	1.06	1.31	1.59	1.89	2.18	2.51	0.02	0.08	0.12	0.14
		3300	0.45	0.63	0.84	1.08	1.34	1.63	1.93	2.22	2.56	0.02	0.08	0.13	0.14
		3400	0.46	0.64	0.85	1.10	1.37	1.66	1.97	2.27	2.60	0.02	0.08	0.13	0.15
		3500	0.46	0.65	0.87	1.12	1.39	1.69	2.01	2.31	2.65	0.02	0.08	0.13	0.15
		3600	0.47	0.66	0.88	1.14	1.42	1.72	2.04	2.35	2.69	0.02	0.09	0.14	0.16
		3700	0.47	0.67	0.90	1.15	1.44	1.75	2.08	2.39	2.74	0.02	0.09	0.14	0.16
		3800	0.48	0.68	0.91	1.17	1.46	1.78	2.11	2.42	2.78	0.02	0.09	0.15	0.16
		3900	0.48	0.68	0.92	1.19	1.49	1.81	2.14	2.46	2.81	0.02	0.09	0.15	0.17
		4000	0.48	0.69	0.93	1.21	1.51	1.83	2.17	2.49	2.85	0.02	0.10	0.15	0.17
		4100	0.49	0.70	0.95	1.22	1.53	1.86	2.20	2.53	2.89	0.02	0.10	0.16	0.18
		4200	0.49	0.71	0.96	1.24	1.55	1.89	2.23	2.56	2.92	0.02	0.10	0.16	0.18
		4300	0.49	0.71	0.97	1.26	1.57	1.91	2.26	2.59	2.95	0.02	0.10	0.17	0.19
		4400	0.50	0.72	0.98	1.27	1.59	1.93	2.29	2.62	2.98	0.02	0.11	0.17	0.19
		4500	0.50	0.73	0.99	1.29	1.61	1.96	2.32	2.65	3.01	0.02	0.11	0.17	0.19
		4600	0.50	0.73	1.00	1.30	1.63	1.98	2.34	2.67	3.04	0.02	0.11	0.18	0.20
		4700	0.50	0.74	1.01	1.32	1.65	2.00	2.37	2.70	3.06	0.02	0.11	0.18	0.20
		4800	0.51	0.74	1.02	1.33	1.67	2.02	2.39	2.72	3.08	0.02	0.12	0.18	0.21
		4900	0.51	0.75	1.03	1.34	1.68	2.04	2.41	2.75	3.10	0.02	0.12	0.19	0.21
		5000	0.51	0.75	1.04	1.35	1.70	2.06	2.43	2.77	3.12	0.02	0.12	0.19	0.22
5100	0.51	0.76	1.05	1.37	1.71	2.08	2.45	2.79	3.14	0.02	0.12	0.20	0.22		
5200	0.51	0.76	1.05	1.38	1.73	2.10	2.47	2.80	3.15	0.03	0.13	0.20	0.23		
5300	0.51	0.77	1.06	1.39	1.74	2.11	2.49	2.82	3.16	0.03	0.13	0.20	0.23		
5400	0.51	0.77	1.07	1.40	1.76	2.13	2.50	2.83	3.17	0.03	0.13	0.21	0.23		
5500	0.51	0.77	1.08	1.41	1.77	2.14	2.52	2.85	3.18	0.03	0.13	0.21	0.24		
5600	0.51	0.78	1.08	1.42	1.78	2.16	2.53	2.86	3.19	0.03	0.13	0.22	0.24		
5800	0.51	0.78	1.09	1.44	1.80	2.18	2.56	2.88	3.19	0.03	0.14	0.22	0.25		
6000	0.51	0.79	1.10	1.45	1.82	2.20	2.57	2.89	3.19	0.03	0.14	0.23	0.26		
6200	0.51	0.79	1.11	1.47	1.84	2.22	2.59	2.90	3.18	0.03	0.15	0.24	0.27		
6400	0.50	0.79	1.12	1.48	1.85	2.23	2.60	2.89	3.15	0.03	0.15	0.25	0.28		
6600	0.50	0.79	1.12	1.49	1.86	2.24	2.60	2.88	3.12	0.03	0.16	0.25	0.29		
6800	0.49	0.79	1.13	1.49	1.87	2.25	2.60	2.87	3.08	0.03	0.16	0.26	0.29		
7000	0.49	0.79	1.13	1.50	1.88	2.25	2.59	2.85	3.03	0.03	0.17	0.27	0.30		
7200	0.48	0.78	1.13	1.50	1.88	2.25	2.58	2.82	2.97	0.03	0.17	0.28	0.31		
7400	0.47	0.78	1.13	1.50	1.88	2.24	2.56	2.78	2.90	0.04	0.18	0.28	0.32		
7600	0.46	0.77	1.12	1.50	1.88	2.23	2.53			0.04	0.18	0.29	0.33		
7800	0.45	0.77	1.12	1.49	1.87	2.22	2.50			0.04	0.19	0.30	0.34		
8000	0.44	0.76	1.11	1.49	1.86	2.20	2.47			0.04	0.19	0.31	0.35		
8200	0.42	0.75	1.11	1.48	1.85	2.17				0.04	0.20	0.32	0.35		
8400	0.41	0.74	1.10	1.47	1.83	2.15				0.04	0.20	0.32	0.36		
												v (m/s)			
												Pulleys			
Dynamically balanced (for details see DIN 2211)															

Where v > 30 m/s, please consult our
Applications Engineering Department

Power Ratings

optibelt VB section A/13

Nominal Power Rating P_N (kW) for β = 180° and L_d = 1730 mm



Table 49

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)															Additional power (kW) per belt for speed ratio i			
			71	80	90	95	100	106	112	118	125	132	140	150	160	180	to 1.05	to 1.26	to 1.57	> 1.57	
Statically balanced	②	700	0.52	0.74	0.97	1.09	1.21	1.35	1.48	1.62	1.78	1.94	2.12	2.34	2.56	2.99	0.02	0.08	0.12	0.14	
		950	0.63	0.92	1.23	1.38	1.53	1.71	1.89	2.07	2.28	2.49	2.72	3.01	3.29	3.85	0.02	0.10	0.16	0.18	
		1450	0.81	1.22	1.67	1.89	2.11	2.37	2.62	2.88	3.17	3.46	3.79	4.19	4.59	5.36	0.03	0.16	0.25	0.28	
		2850	1.04	1.75	2.51	2.88	3.25	3.67	4.09	4.50	4.96	5.41	5.90	6.48	7.03	8.03	0.06	0.31	0.49	0.55	
	100	0.12	0.16	0.20	0.22	0.24	0.26	0.29	0.31	0.34	0.37	0.40	0.44	0.48	0.55	0.00	0.01	0.02	0.02		
	200	0.21	0.28	0.36	0.39	0.43	0.48	0.52	0.57	0.62	0.67	0.73	0.80	0.87	1.02	0.00	0.02	0.03	0.04		
	300	0.29	0.39	0.50	0.55	0.61	0.67	0.74	0.80	0.88	0.95	1.03	1.14	1.24	1.45	0.01	0.03	0.05	0.06		
	400	0.35	0.48	0.63	0.70	0.77	0.85	0.94	1.02	1.12	1.21	1.32	1.46	1.59	1.86	0.01	0.04	0.07	0.08		
	500	0.41	0.57	0.75	0.84	0.92	1.02	1.13	1.23	1.35	1.46	1.60	1.76	1.93	2.25	0.01	0.05	0.09	0.10		
	⑤	600	0.47	0.66	0.86	0.97	1.07	1.19	1.31	1.43	1.57	1.71	1.86	2.06	2.25	2.63	0.01	0.06	0.10	0.12	
		700	0.52	0.74	0.97	1.09	1.21	1.35	1.48	1.62	1.78	1.94	2.12	2.34	2.56	2.99	0.02	0.08	0.12	0.14	
		800	0.57	0.81	1.08	1.21	1.34	1.50	1.65	1.81	1.99	2.16	2.36	2.61	2.86	3.34	0.02	0.09	0.14	0.16	
		900	0.61	0.88	1.18	1.32	1.47	1.64	1.82	1.99	2.18	2.38	2.60	2.88	3.15	3.69	0.02	0.10	0.16	0.18	
		1000	0.65	0.95	1.27	1.44	1.59	1.78	1.97	2.16	2.38	2.59	2.83	3.13	3.43	4.01	0.02	0.11	0.17	0.19	
		1100	0.69	1.01	1.37	1.54	1.71	1.92	2.13	2.33	2.56	2.79	3.06	3.38	3.70	4.33	0.02	0.12	0.19	0.21	
		1200	0.73	1.08	1.46	1.64	1.83	2.05	2.27	2.49	2.74	2.99	3.28	3.62	3.97	4.64	0.03	0.13	0.21	0.23	
		1300	0.76	1.14	1.54	1.74	1.94	2.18	2.42	2.65	2.92	3.19	3.49	3.86	4.22	4.94	0.03	0.14	0.22	0.25	
		1400	0.79	1.19	1.63	1.84	2.05	2.30	2.55	2.80	3.09	3.37	3.69	4.08	4.47	5.22	0.03	0.15	0.24	0.27	
		1500	0.82	1.24	1.71	1.93	2.16	2.42	2.69	2.95	3.25	3.55	3.89	4.30	4.71	5.50	0.03	0.16	0.26	0.29	
	⑩	1600	0.85	1.30	1.78	2.02	2.26	2.54	2.82	3.10	3.41	3.73	4.08	4.51	4.94	5.76	0.03	0.17	0.28	0.31	
		1700	0.88	1.34	1.86	2.11	2.36	2.65	2.95	3.23	3.57	3.90	4.26	4.72	5.16	6.02	0.04	0.18	0.29	0.33	
		1800	0.90	1.39	1.93	2.19	2.45	2.76	3.07	3.37	3.72	4.06	4.44	4.91	5.37	6.26	0.04	0.19	0.31	0.35	
		1900	0.92	1.44	2.00	2.27	2.54	2.87	3.19	3.50	3.86	4.22	4.62	5.10	5.58	6.49	0.04	0.21	0.33	0.37	
		2000	0.94	1.48	2.06	2.35	2.63	2.97	3.30	3.62	4.00	4.37	4.78	5.28	5.77	6.71	0.04	0.22	0.35	0.39	
		2100	0.96	1.52	2.12	2.42	2.72	3.06	3.41	3.75	4.13	4.51	4.94	5.46	5.96	6.91	0.05	0.23	0.36	0.41	
		2200	0.97	1.55	2.18	2.49	2.80	3.16	3.51	3.86	4.26	4.65	5.09	5.62	6.13	7.10	0.05	0.24	0.38	0.43	
		2300	0.99	1.59	2.24	2.56	2.88	3.25	3.61	3.97	4.38	4.79	5.23	5.78	6.30	7.28	0.05	0.25	0.40	0.45	
		2400	1.00	1.62	2.30	2.63	2.95	3.33	3.71	4.08	4.50	4.91	5.37	5.93	6.46	7.45	0.05	0.26	0.42	0.47	
		2500	1.01	1.66	2.35	2.69	3.02	3.42	3.80	4.18	4.61	5.03	5.50	6.06	6.60	7.60	0.05	0.27	0.43	0.49	
	⑮	2600	1.02	1.68	2.40	2.75	3.09	3.50	3.89	4.28	4.72	5.15	5.62	6.20	6.74	7.74	0.06	0.28	0.45	0.51	
		2700	1.03	1.71	2.45	2.80	3.16	3.57	3.98	4.37	4.82	5.26	5.74	6.32	6.86	7.87	0.06	0.29	0.47	0.53	
		2800	1.04	1.74	2.49	2.86	3.22	3.64	4.05	4.46	4.92	5.36	5.85	6.43	6.98	7.98	0.06	0.30	0.48	0.54	
		2900	1.04	1.76	2.53	2.91	3.28	3.71	4.13	4.54	5.01	5.45	5.95	6.53	7.08	8.07	0.06	0.31	0.50	0.56	
		3000	1.04	1.78	2.57	2.95	3.33	3.77	4.20	4.62	5.09	5.54	6.04	6.63	7.18	8.15	0.06	0.32	0.52	0.58	
		3100	1.04	1.80	2.61	3.00	3.38	3.83	4.27	4.69	5.17	5.62	6.12	6.71	7.26	8.21	0.07	0.34	0.54	0.60	
		3200	1.04	1.81	2.64	3.04	3.43	3.88	4.33	4.75	5.24	5.70	6.20	6.79	7.33	8.26	0.07	0.35	0.55	0.62	
		3300	1.04	1.83	2.67	3.08	3.47	3.93	4.38	4.82	5.30	5.76	6.27	6.85	7.38	8.29	0.07	0.36	0.57	0.64	
		3400	1.04	1.84	2.70	3.11	3.51	3.98	4.43	4.87	5.36	5.82	6.32	6.90	7.43	8.30	0.07	0.37	0.59	0.66	
		3500	1.03	1.85	2.72	3.14	3.55	4.02	4.48	4.92	5.41	5.87	6.37	6.95	7.46	8.30	0.08	0.38	0.61	0.68	
	⑳	3600	1.02	1.86	2.74	3.17	3.58	4.06	4.52	4.96	5.45	5.92	6.41	6.98	7.48		0.08	0.39	0.62	0.70	
		3700	1.01	1.86	2.76	3.19	3.61	4.09	4.56	5.00	5.49	5.95	6.44	7.00	7.48		0.08	0.40	0.64	0.72	
		3800	1.00	1.87	2.78	3.21	3.64	4.12	4.59	5.03	5.52	5.98	6.47	7.01	7.47		0.08	0.41	0.66	0.74	
		3900	0.99	1.87	2.79	3.23	3.66	4.15	4.62	5.06	5.55	6.00	6.48	7.01	7.45		0.08	0.42	0.67	0.76	
		4000	0.98	1.87	2.80	3.24	3.67	4.17	4.64	5.08	5.57	6.01	6.48	6.99	7.42		0.09	0.43	0.69	0.78	
		4100	0.96	1.86	2.81	3.25	3.69	4.18	4.65	5.09	5.58	6.02	6.47	6.97	7.37		0.09	0.44	0.71	0.80	
		4200	0.94	1.86	2.81	3.26	3.70	4.19	4.66	5.10	5.58	6.01	6.46	6.93			0.09	0.45	0.73	0.82	
		4300	0.92	1.85	2.81	3.26	3.70	4.20	4.66	5.10	5.57	6.00	6.43	6.88			0.09	0.46	0.74	0.84	
		4400	0.90	1.84	2.81	3.26	3.70	4.20	4.66	5.10	5.56	5.98	6.39	6.82			0.10	0.48	0.76	0.86	
		4500	0.88	1.82	2.80	3.26	3.70	4.19	4.66	5.08	5.54	5.94	6.34	6.74			0.10	0.49	0.78	0.88	
	㉑	4600	0.85	1.81	2.79	3.25	3.69	4.18	4.64	5.07	5.51	5.90					0.10	0.50	0.80	0.89	
		4700	0.83	1.79	2.78	3.24	3.68	4.17	4.62	5.04	5.47	5.85					0.10	0.51	0.81	0.91	
		4800	0.80	1.77	2.76	3.22	3.66	4.15	4.60	5.01	5.43	5.79					0.10	0.52	0.83	0.93	
		4900	0.77	1.75	2.74	3.20	3.64	4.12	4.57	4.97	5.38	5.72					0.11	0.53	0.85	0.95	
		5000	0.73	1.72	2.72	3.18	3.61	4.09	4.53	4.92	5.31	5.64					0.11	0.54	0.87	0.97	
		5100	0.70	1.69	2.69	3.15	3.58	4.06	4.48	4.86							0.11	0.55	0.88	0.99	
		5200	0.66	1.66	2.66	3.12	3.55	4.01	4.43	4.80							0.11	0.56	0.90	1.01	
		5300	0.62	1.63	2.63	3.08	3.51	3.97	4.38	4.73							0.11	0.57	0.92	1.03	
		5400	0.58	1.59	2.59	3.04	3.46	3.91	4.31	4.66							0.12	0.58	0.93	1.05	
		5500	0.54	1.55	2.55	3.00	3.41	3.86	4.24	4.57							0.12	0.59	0.95	1.07	
		5600	0.50	1.51	2.51	2.95	3.36	3.79									0.12	0.61	0.97	1.09	
		5700	0.45	1.47	2.46	2.90	3.30	3.72									0.12	0.62	0.99	1.11	
		5800	0.40	1.42	2.41	2.84	3.23	3.64									0.13	0.63	1.00	1.13	
		5900	0.35	1.37	2.35	2.78	3.16	3.56									0.13	0.64	1.02	1.15	
		6000	0.30	1.32	2.29	2.71	3.09	3.47									0.13	0.65	1.04	1.17	
Where v > 30 m/s, please consult our Applications Engineering Department																					
㉒			㉓															v (m/s)			
Dynamically balanced (for details see DIN 2211)																	Pulleys				

Power Ratings

optibelt VB section B/17

Nominal Power Rating P_N (kW) for β = 180° and L_d = 2280 mm



Table 50

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)															Additional power (kW) per belt for speed ratio i			
			112	125	132	140	150	160	170	180	190	200	212	224	236	250	280	to 1.05	to 1.26	to 1.57	> 1.57
Statically balanced	5	700	1.49	1.96	2.21	2.50	2.85	3.20	3.55	3.89	4.24	4.58	4.98	5.38	5.78	6.23	7.19	0.03	0.17	0.27	0.30
		950	1.83	2.45	2.77	3.15	3.61	4.06	4.51	4.96	5.40	5.83	6.35	6.86	7.36	7.94	9.14	0.05	0.23	0.37	0.41
		1450	2.37	3.25	3.72	4.24	4.89	5.52	6.14	6.75	7.35	7.94	8.63	9.31	9.96	10.70	12.20	0.07	0.35	0.56	0.63
		2850	2.99	4.37	5.08	5.87	6.80	7.67	8.49	9.24	9.93	10.56	11.22	11.78	12.24	12.62	12.90	0.14	0.69	1.10	1.24
		100	0.33	0.41	0.46	0.51	0.57	0.63	0.69	0.75	0.81	0.87	0.94	1.01	1.08	1.17	1.34	0.00	0.02	0.04	0.04
		200	0.58	0.73	0.81	0.91	1.02	1.14	1.25	1.37	1.48	1.59	1.73	1.86	1.99	2.15	2.47	0.01	0.05	0.08	0.09
		300	0.79	1.01	1.13	1.27	1.43	1.60	1.77	1.93	2.09	2.25	2.45	2.64	2.83	3.05	3.52	0.01	0.07	0.12	0.13
		400	0.99	1.27	1.43	1.60	1.82	2.03	2.25	2.46	2.67	2.88	3.13	3.37	3.62	3.91	4.51	0.02	0.10	0.15	0.17
		500	1.17	1.52	1.70	1.92	2.18	2.44	2.70	2.96	3.22	3.47	3.77	4.07	4.37	4.72	5.45	0.02	0.12	0.19	0.22
		600	1.33	1.74	1.96	2.21	2.52	2.83	3.13	3.44	3.74	4.03	4.39	4.74	5.09	5.49	6.34	0.03	0.14	0.23	0.26
	700	1.49	1.96	2.21	2.50	2.85	3.20	3.55	3.89	4.24	4.58	4.98	5.38	5.78	6.23	7.19	0.03	0.17	0.27	0.30	
	800	1.63	2.16	2.44	2.77	3.16	3.56	3.95	4.33	4.72	5.09	5.55	5.99	6.43	6.94	8.00	0.04	0.19	0.31	0.35	
	900	1.77	2.35	2.67	3.02	3.46	3.90	4.33	4.75	5.17	5.59	6.09	6.57	7.06	7.61	8.77	0.04	0.22	0.35	0.39	
	1000	1.89	2.54	2.88	3.27	3.75	4.22	4.69	5.16	5.61	6.07	6.60	7.13	7.65	8.25	9.50	0.05	0.24	0.39	0.43	
	1100	2.01	2.71	3.08	3.50	4.02	4.53	5.04	5.54	6.03	6.52	7.10	7.66	8.22	8.86	10.18	0.05	0.27	0.42	0.48	
	1200	2.12	2.88	3.28	3.73	4.28	4.83	5.37	5.91	6.44	6.95	7.57	8.17	8.76	9.43	10.82	0.06	0.29	0.46	0.52	
	1300	2.23	3.03	3.46	3.94	4.53	5.12	5.69	6.26	6.82	7.37	8.01	8.64	9.26	9.97	11.41	0.06	0.31	0.50	0.56	
	1400	2.33	3.18	3.63	4.14	4.77	5.39	6.00	6.59	7.18	7.76	8.43	9.09	9.74	10.47	11.95	0.07	0.34	0.54	0.61	
	1500	2.42	3.32	3.80	4.33	5.00	5.65	6.28	6.91	7.52	8.12	8.83	9.51	10.18	10.93	12.44	0.07	0.36	0.58	0.65	
	1600	2.50	3.45	3.95	4.52	5.21	5.89	6.56	7.21	7.85	8.47	9.20	9.90	10.58	11.35	12.88	0.08	0.39	0.62	0.69	
	1700	2.58	3.57	4.10	4.69	5.41	6.12	6.81	7.49	8.15	8.79	9.54	10.26	10.95	11.73	13.26	0.08	0.41	0.66	0.74	
	1800	2.65	3.69	4.24	4.85	5.60	6.34	7.05	7.75	8.43	9.09	9.85	10.58	11.29	12.07	13.59	0.09	0.43	0.70	0.78	
	1900	2.72	3.79	4.36	5.00	5.78	6.54	7.27	7.99	8.69	9.36	10.14	10.88	11.58	12.36	13.85	0.09	0.46	0.73	0.82	
	2000	2.77	3.89	4.48	5.14	5.94	6.72	7.48	8.21	8.92	9.61	10.39	11.14	11.84	12.61	14.06	0.10	0.48	0.77	0.87	
	2100	2.82	3.98	4.59	5.27	6.09	6.90	7.67	8.42	9.14	9.83	10.62	11.36	12.06	12.81	14.19	0.10	0.51	0.81	0.91	
	2200	2.87	4.06	4.69	5.39	6.23	7.05	7.84	8.60	9.33	10.02	10.81	11.55	12.23	12.96	14.26	0.11	0.53	0.85	0.96	
	2300	2.91	4.14	4.78	5.49	6.36	7.19	7.99	8.76	9.49	10.19	10.97	11.70	12.36	13.06	14.26	0.11	0.56	0.89	1.00	
	2400	2.94	4.20	4.86	5.59	6.47	7.32	8.13	8.90	9.63	10.32	11.10	11.81	12.45	13.11	14.19	0.12	0.58	0.93	1.04	
	2500	2.96	4.25	4.93	5.67	6.57	7.43	8.24	9.02	9.75	10.43	11.19	11.88	12.49	13.10	14.04	0.12	0.60	0.97	1.09	
	2600	2.98	4.30	4.98	5.74	6.65	7.52	8.34	9.11	9.83	10.51	11.25	11.90	12.48			0.13	0.63	1.00	1.13	
	2700	2.99	4.34	5.03	5.80	6.72	7.59	8.41	9.18	9.90	10.55	11.27	11.89	12.42			0.13	0.65	1.04	1.17	
	2800	2.99	4.36	5.07	5.85	6.77	7.65	8.47	9.23	9.93	10.57	11.25	11.83	12.31			0.14	0.68	1.08	1.22	
	2900	2.98	4.38	5.10	5.88	6.81	7.69	8.50	9.25	9.93	10.55	11.19	11.73	12.15			0.14	0.70	1.12	1.26	
	3000	2.97	4.39	5.11	5.90	6.84	7.71	8.51	9.25	9.91	10.49	11.09	11.58	11.93			0.14	0.72	1.16	1.30	
	3100	2.95	4.39	5.12	5.91	6.84	7.71	8.50	9.22	9.85	10.41						0.15	0.75	1.20	1.35	
	3200	2.92	4.37	5.11	5.90	6.83	7.69	8.47	9.16	9.77	10.28						0.15	0.77	1.24	1.39	
	3300	2.89	4.35	5.09	5.88	6.81	7.65	8.41	9.08	9.65	10.12						0.16	0.80	1.27	1.43	
	3400	2.85	4.32	5.06	5.85	6.77	7.59	8.33	8.96	9.50	9.92						0.16	0.82	1.31	1.48	
	3500	2.80	4.27	5.01	5.80	6.71	7.52	8.22	8.82	9.31	9.68						0.17	0.84	1.35	1.52	
	3600	2.74	4.22	4.96	5.74	6.63	7.41	8.09									0.17	0.87	1.39	1.56	
	3700	2.67	4.15	4.89	5.66	6.53	7.29	7.93									0.18	0.89	1.43	1.61	
	3800	2.59	4.08	4.80	5.57	6.42	7.15	7.75									0.18	0.92	1.47	1.65	
	3900	2.51	3.99	4.71	5.46	6.29	6.98	7.54									0.19	0.94	1.51	1.69	
	4000	2.42	3.89	4.60	5.34	6.13	6.79	7.31									0.19	0.97	1.55	1.74	
	4100	2.31	3.78	4.48	5.19	5.96											0.20	0.99	1.58	1.78	
	4200	2.20	3.65	4.34	5.04	5.77											0.20	1.01	1.62	1.82	
	4300	2.08	3.52	4.19	4.86	5.56											0.21	1.04	1.66	1.87	
	4400	1.95	3.37	4.02	4.67	5.32											0.21	1.06	1.70	1.91	
	4500	1.82	3.21	3.84	4.46	5.07											0.22	1.09	1.74	1.95	
	4600	1.67	3.03	3.65													0.22	1.11	1.78	2.00	
	4700	1.51	2.85	3.44													0.23	1.13	1.82	2.04	
	4800	1.34	2.65	3.21													0.23	1.16	1.85	2.08	
	4900	1.16	2.43	2.97													0.24	1.18	1.89	2.13	
	5000	0.97	2.20	2.71													0.24	1.21	1.93	2.17	
	Where v > 30 m/s, please consult our Applications Engineering Department																				
30																		v (m/s)			
Dynamically balanced (for details see DIN 2211)																		Pulleys			

optibelt VB section 20

Nominal Power Rating P_N (kW) for $\beta = 180^\circ$ and $L_d = 3198$ mm



Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)									Additional power (kW) per belt for speed ratio i					
			140	160	180	200	224	236	250	280	315	355	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57	
Statically balanced	5	700	2.62	3.33	4.02	4.70	5.49	5.88	6.32	7.25	8.30	9.44	0.04	0.18	0.29	0.32	
		950	3.21	4.11	4.99	5.83	6.82	7.30	7.84	8.97	10.21	11.53	0.05	0.24	0.39	0.44	
		1450	4.08	5.30	6.46	7.56	8.80	9.38	10.03	11.32	12.61	13.81	0.07	0.37	0.59	0.67	
		2850	4.64	6.11	7.29	8.16								0.15	0.73	1.17	1.31
		50	0.34	0.41	0.48	0.55	0.63	0.68	0.72	0.83	0.94	1.08	0.00	0.01	0.02	0.02	
		100	0.60	0.73	0.86	0.99	1.15	1.22	1.31	1.50	1.71	1.96	0.01	0.03	0.04	0.05	
		150	0.82	1.02	1.20	1.39	1.61	1.72	1.84	2.11	2.42	2.76	0.01	0.04	0.06	0.07	
		200	1.04	1.28	1.52	1.76	2.04	2.18	2.34	2.68	3.07	3.51	0.01	0.05	0.08	0.09	
		250	1.23	1.53	1.82	2.11	2.45	2.62	2.82	3.23	3.70	4.23	0.01	0.06	0.10	0.12	
		300	1.42	1.76	2.11	2.44	2.84	3.04	3.27	3.75	4.29	4.91	0.02	0.08	0.12	0.14	
		350	1.59	1.99	2.38	2.76	3.22	3.44	3.70	4.24	4.87	5.56	0.02	0.09	0.14	0.16	
		400	1.76	2.20	2.64	3.07	3.58	3.83	4.11	4.72	5.41	6.19	0.02	0.10	0.16	0.18	
		450	1.92	2.41	2.89	3.37	3.92	4.20	4.51	5.18	5.94	6.79	0.02	0.12	0.18	0.21	
		500	2.07	2.61	3.13	3.65	4.26	4.56	4.90	5.63	6.45	7.36	0.03	0.13	0.21	0.23	
		550	2.22	2.80	3.37	3.93	4.58	4.90	5.28	6.06	6.94	7.92	0.03	0.14	0.23	0.25	
		600	2.36	2.98	3.59	4.19	4.90	5.24	5.64	6.47	7.41	8.45	0.03	0.15	0.25	0.28	
		650	2.49	3.16	3.81	4.45	5.20	5.56	5.99	6.87	7.86	8.96	0.03	0.17	0.27	0.30	
		700	2.62	3.33	4.02	4.70	5.49	5.88	6.32	7.25	8.30	9.44	0.04	0.18	0.29	0.32	
		750	2.75	3.50	4.23	4.94	5.78	6.18	6.65	7.63	8.72	9.91	0.04	0.19	0.31	0.35	
		800	2.87	3.66	4.43	5.18	6.05	6.48	6.97	7.98	9.12	10.35	0.04	0.21	0.33	0.37	
		850	2.99	3.81	4.62	5.40	6.32	6.76	7.27	8.33	9.50	10.77	0.04	0.22	0.35	0.39	
		900	3.10	3.96	4.81	5.62	6.57	7.03	7.56	8.66	9.87	11.16	0.05	0.23	0.37	0.42	
		950	3.21	4.11	4.99	5.83	6.82	7.30	7.84	8.97	10.21	11.53	0.05	0.24	0.39	0.44	
		1000	3.31	4.25	5.16	6.04	7.06	7.55	8.11	9.27	10.54	11.88	0.05	0.26	0.41	0.46	
		1050	3.41	4.39	5.33	6.24	7.29	7.79	8.37	9.56	10.85	12.20	0.05	0.27	0.43	0.48	
		1100	3.51	4.52	5.49	6.43	7.51	8.03	8.62	9.83	11.14	12.50	0.06	0.28	0.45	0.51	
		1150	3.60	4.64	5.65	6.61	7.72	8.25	8.86	10.09	11.41	12.77	0.06	0.29	0.47	0.53	
		1200	3.69	4.76	5.80	6.79	7.92	8.47	9.08	10.33	11.66	13.					

Power Ratings

optibelt VB section 25

Nominal Power Rating P_N (kW) for β = 180° and L_d = 4561 mm



Table 53

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)									Additional power (kW) per belt for speed ratio i					
			224	236	250	280	315	355	400	450	500	560	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57	
Statically balanced	5	700	5.68	6.47	7.38	9.28	11.45	13.84	16.43	19.16	21.74	24.62	0.12	0.61	0.97	1.09	
		950	6.86	7.86	9.00	11.38	14.03	16.90	19.91	22.94	25.63	28.37	0.16	0.82	1.32	1.48	
		1450	8.15	9.43	10.88	13.78	16.81	19.77	22.40				0.25	1.26	2.01	2.26	
		2850											0.49	2.47	3.95	4.44	
		50	0.71	0.78	0.87	1.05	1.26	1.50	1.76	2.06	2.35	2.69	0.01	0.04	0.07	0.08	
		100	1.26	1.40	1.56	1.91	2.31	2.76	3.26	3.81	4.35	5.00	0.02	0.09	0.14	0.16	
		150	1.76	1.96	2.20	2.69	3.27	3.92	4.64	5.44	6.22	7.15	0.03	0.13	0.21	0.23	
		200	2.22	2.48	2.79	3.43	4.18	5.02	5.96	6.98	7.99	9.19	0.03	0.17	0.28	0.31	
		250	2.65	2.97	3.34	4.13	5.04	6.07	7.21	8.46	9.69	11.14	0.04	0.22	0.35	0.39	
		300	3.06	3.43	3.87	4.80	5.87	7.08	8.41	9.87	11.30	12.99	0.05	0.26	0.42	0.47	
		350	3.44	3.88	4.38	5.44	6.67	8.05	9.57	11.23	12.86	14.76	0.06	0.30	0.49	0.55	
		400	3.81	4.30	4.86	6.06	7.43	8.98	10.68	12.53	14.34	16.45	0.07	0.35	0.55	0.62	
		450	4.16	4.70	5.33	6.65	8.17	9.87	11.75	13.78	15.75	18.05	0.08	0.39	0.62	0.70	
		500	4.49	5.09	5.77	7.22	8.88	10.74	12.77	14.97	17.10	19.56	0.09	0.43	0.69	0.78	
		550	4.81	5.45	6.20	7.77	9.56	11.56	13.75	16.11	18.37	20.97	0.10	0.48	0.76	0.86	
		600	5.12	5.81	6.61	8.29	10.22	12.36	14.69	17.18	19.57	22.29	0.10	0.52	0.83	0.94	
		650	5.41	6.15	7.00	8.80	10.85	13.12	15.58	18.20	20.70	23.51	0.11	0.56	0.90	1.01	
		700	5.68	6.47	7.38	9.28	11.45	13.84	16.43	19.16	21.74	24.62	0.12	0.61	0.97	1.09	
		750	5.95	6.78	7.73	9.75	12.02	14.53	17.22	20.05	22.70	25.61	0.13	0.65	1.04	1.17	
		800	6.20	7.07	8.08	10.19	12.57	15.18	17.97	20.88	23.57	26.49	0.14	0.69	1.11	1.25	
		850	6.43	7.35	8.40	10.61	13.09	15.79	18.67	21.64	24.35	27.25	0.15	0.74	1.18	1.33	
		900	6.65	7.61	8.71	11.00	13.57	16.37	19.31	22.33	25.04	27.88	0.16	0.78	1.25	1.40	
		950	6.86	7.86	9.00	11.38	14.03	16.90	19.91	22.94	25.63	28.37	0.16	0.82	1.32	1.48	
		1000	7.06	8.09	9.27	11.73	14.46	17.40	20.44	23.48	26.12	28.72	0.17	0.87	1.39	1.56	
		1050	7.24	8.30	9.52	12.06	14.86	17.85	20.92	23.93	26.50	28.93	0.18	0.91	1.46	1.64	
		1100	7.40	8.50	9.76	12.36	15.22	18.26	21.33	24.31	26.77	28.99	0.19	0.95	1.53	1.72	
		1150	7.55	8.69	9.98	12.64	15.56	18.62	21.69	24.60	26.92	28.88	0.20	1.00	1.60	1.79	
		1200	7.69	8.85	10.18	12.90	15.86	18.93	21.98	24.80	26.96	28.62	0.21	1.04	1.66	1.87	
		1250	7.81	9.00	10.36	13.13	16.12	19.20	22.20	24.90	26.87	28.18	0.22	1.08	1.73	1.95	
		1300	7.92	9.14	10.52	13.33	16.35	19.42	22.36	24.92			0.23	1.13	1.80	2.03	
		1350	8.02	9.25	10.66	13.51	16.54	19.59	22.45	24.83			0.23	1.17	1.87	2.10	
		1400	8.09	9.35	10.78	13.66	16.69	19.71	22.46	24.65			0.24	1.21	1.94	2.18	
		1450	8.15	9.43	10.88	13.78	16.81	19.77	22.40	24.36			0.25	1.26	2.01	2.26	
		1500	8.20	9.50	10.96	13.87	16.89	19.78	22.26	23.96			0.26	1.30	2.08	2.34	
		1550	8.23	9.54	11.01	13.93	16.92	19.73					0.27	1.34	2.15	2.42	
		1600	8.24	9.57	11.05	13.97	16.92	19.63					0.28	1.39	2.22	2.49	
		1650	8.24	9.57	11.06	13.97	16.87	19.46					0.29	1.43	2.29	2.57	
		1700	8.22	9.56	11.04	13.94	16.78	19.24					0.29	1.47	2.36	2.65	
		1750	8.18	9.52	11.01	13.88	16.64	18.95					0.30	1.52	2.43	2.73	
		1800	8.12	9.47	10.95	13.79	16.46						0.31	1.56	2.50	2.81	
		1850	8.04	9.39	10.87	13.66	16.23						0.32	1.60	2.57	2.88	
		1900	7.95	9.29	10.76	13.50	15.95						0.33	1.65	2.64	2.96	
		1950	7.84	9.17	10.62	13.30	15.63						0.34	1.69	2.70	3.04	
		2000	7.70	9.03	10.46	13.07	15.25						0.35	1.73	2.77	3.12	
		2050	7.55	8.87	10.27	12.80							0.36	1.78	2.84	3.20	
		2100	7.38	8.68	10.06	12.49							0.36	1.82	2.91	3.27	
		2150	7.19	8.47	9.82	12.15							0.37	1.86	2.98	3.35	
		2200	6.97	8.23	9.55	11.76							0.38	1.91	3.05	3.43	
		2250	6.74	7.97	9.25	11.34							0.39	1.95	3.12	3.51	
		2300	6.48	7.69	8.92								0.40	1.99	3.19	3.59	
		2350	6.21	7.38	8.56								0.41	2.04	3.26	3.66	
		2400	5.91	7.04	8.17								0.42	2.08	3.33	3.74	
		2450	5.58	6.68	7.75								0.42	2.12	3.40	3.82	
		2500	5.24	6.29	7.30								0.43	2.17	3.47	3.90	
Where v > 30 m/s, please consult our Applications Engineering Department																	
													v (m/s)				
Dynamically balanced (for details see DIN 2211)													Pulleys				

Dynamically balanced (for details see DIN 2211)

Power Ratings

optibelt VB section D/32

Nominal Power Rating P_N (kW) for β = 180° and L_d = 6375 mm



Power Transmission

Table 54

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)													Additional power (kW) per belt for speed ratio i						
			315	355	375	400	425	450	500	560	630	670	710	750	800	900	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57		
Statically balanced	5	700	15.30	19.17	21.05	23.36	25.62	27.82	32.05	36.82	41.91	44.59	47.08	49.38	51.98	56.17	0.23	1.14	1.82	2.05		
		950	18.50	23.20	25.45	28.15	30.75	33.23	37.80	42.59	47.12						0.31	1.54	2.47	2.78		
		1450	21.43	26.56	28.81	31.31	33.45	35.22									0.47	2.36	3.77	4.24		
		20	0.80	0.96	1.04	1.14	1.24	1.34	1.54	1.78	2.05	2.21	2.36	2.51	2.71	3.08	0.01	0.03	0.05	0.06		
		40	1.46	1.77	1.93	2.12	2.31	2.50	2.87	3.32	3.84	4.13	4.42	4.71	5.07	5.79	0.01	0.06	0.10	0.12		
		60	2.08	2.53	2.75	3.03	3.31	3.58	4.13	4.77	5.52	5.95	6.37	6.79	7.31	8.34	0.02	0.10	0.16	0.18		
		80	2.66	3.25	3.54	3.90	4.26	4.61	5.32	6.17	7.14	7.69	8.24	8.78	9.46	10.80	0.03	0.13	0.21	0.23		
		100	3.22	3.94	4.29	4.74	5.18	5.61	6.48	7.51	8.70	9.38	10.05	10.71	11.54	13.18	0.03	0.16	0.26	0.29		
		120	3.76	4.61	5.03	5.55	6.07	6.58	7.61	8.82	10.23	11.02	11.81	12.59	13.56	15.49	0.04	0.19	0.31	0.35		
		140	4.28	5.26	5.74	6.34	6.94	7.53	8.71	10.10	11.71	12.62	13.52	14.42	15.53	17.73	0.05	0.23	0.36	0.41		
		160	4.79	5.89	6.43	7.11	7.78	8.45	9.78	11.35	13.16	14.19	15.20	16.21	17.46	19.93	0.05	0.26	0.42	0.47		
		180	5.29	6.51	7.11	7.87	8.61	9.36	10.83	12.57	14.58	15.72	16.84	17.96	19.34	22.06	0.06	0.29	0.47	0.53		
		200	5.77	7.11	7.78	8.61	9.43	10.24	11.86	13.77	15.97	17.22	18.45	19.67	21.18	24.15	0.06	0.32	0.52	0.58		
		220	6.24	7.71	8.43	9.33	10.22	11.11	12.87	14.95	17.34	18.69	20.02	21.34	22.97	26.18	0.07	0.36	0.57	0.64		
		240	6.70	8.29	9.07	10.04	11.01	11.97	13.86	16.10	18.68	20.12	21.56	22.98	24.73	28.16	0.08	0.39	0.62	0.70		
		260	7.16	8.86	9.70	10.74	11.78	12.80	14.84	17.24	19.99	21.53	23.06	24.58	26.44	30.09	0.08	0.42	0.68	0.76		
		280	7.60	9.42	10.31	11.43	12.53	13.63	15.79	18.35	21.27	22.91	24.54	26.14	28.11	31.96	0.09	0.45	0.73	0.82		
		300	8.04	9.97	10.92	12.10	13.27	14.44	16.73	19.44	22.53	24.27	25.98	27.67	29.74	33.78	0.10	0.49	0.78	0.88		
		10	320	8.47	10.51	11.51	12.77	14.00	15.23	17.66	20.51	23.77	25.59	27.39	29.16	31.33	35.55	0.10	0.52	0.83	0.94	
			340	8.89	11.04	12.10	13.42	14.72	16.01	18.56	21.56	24.97	26.88	28.76	30.61	32.87	37.26	0.11	0.55	0.88	0.99	
			360	9.30	11.56	12.68	14.06	15.43	16.78	19.46	22.59	26.16	28.15	30.10	32.02	34.37	38.90	0.12	0.58	0.94	1.05	
			380	9.71	12.07	13.24	14.69	16.12	17.54	20.33	23.60	27.31	29.38	31.41	33.40	35.83	40.49	0.12	0.62	0.99	1.11	
			400	10.11	12.58	13.80	15.31	16.80	18.28	21.19	24.59	28.44	30.59	32.68	34.74	37.24	42.02	0.13	0.65	1.04	1.17	
			420	10.50	13.08	14.35	15.92	17.47	19.01	22.03	25.56	29.55	31.76	33.92	36.03	38.60	43.48	0.14	0.68	1.09	1.23	
			440	10.88	13.56	14.89	16.52	18.13	19.73	22.86	26.51	30.62	32.90	35.12	37.29	39.91	44.88	0.14	0.71	1.14	1.29	
			460	11.26	14.04	15.41	17.11	18.78	20.43	23.67	27.44	31.67	34.01	36.29	38.50	41.18	46.21	0.15	0.75	1.20	1.34	
			480	11.63	14.52	15.93	17.69	19.42	21.12	24.46	28.34	32.69	35.09	37.41	39.67	42.39	47.47	0.16	0.78	1.25	1.40	
			500	12.00	14.98	16.45	18.25	20.04	21.80	25.24	29.23	33.69	36.13	38.50	40.80	43.55	48.66	0.16	0.81	1.30	1.46	
			520	12.36	15.44	16.95	18.81	20.65	22.46	26.00	30.09	34.65	37.14	39.55	41.88	44.66	49.78	0.17	0.84	1.35	1.52	
			540	12.71	15.88	17.44	19.36	21.25	23.11	26.74	30.93	35.58	38.12	40.56	42.91	45.71	50.82	0.18	0.88	1.40	1.58	
			560	13.06	16.32	17.92	19.90	21.84	23.75	27.47	31.75	36.49	39.06	41.53	43.90	46.71	51.78	0.18	0.91	1.46	1.64	
			580	13.40	16.75	18.40	20.42	22.42	24.37	28.18	32.55	37.36	39.96	42.46	44.84	47.64	52.67	0.19	0.94	1.51	1.69	
			600	13.73	17.18	18.86	20.94	22.98	24.98	28.87	33.32	38.20	40.83	43.34	45.73	48.52	53.47	0.19	0.97	1.56	1.75	
			15	620	14.06	17.59	19.32	21.45	23.53	25.58	29.54	34.07	39.01	41.66	44.18	46.56	49.34	54.19	0.20	1.01	1.61	1.81
				640	14.38	18.00	19.77	21.94	24.07	26.16	30.20	34.79	39.79	42.45	44.98	47.35	50.10	54.82	0.21	1.04	1.66	1.87
				660	14.69	18.40	20.20	22.43	24.60	26.73	30.83	35.49	40.53	43.20	45.72	48.08	50.79	55.36	0.21	1.07	1.72	1.93
				680	15.00	18.79	20.63	22.90	25.11	27.28	31.45	36.17	41.24	43.92	46.43	48.76	51.42	55.81	0.22	1.10	1.77	1.99
				700	15.30	19.17	21.05	23.36	25.62	27.82	32.05	36.82	41.91	44.59	47.08	49.38	51.98	56.17	0.23	1.14	1.82	2.05
		720		15.59	19.54	21.46	23.81	26.11	28.34	32.63	37.44	42.55	45.22	47.68	49.95	52.47	56.44	0.23	1.17	1.87	2.10	
		740		15.88	19.90	21.86	24.25	26.58	28.85	33.19	38.04	43.16	45.80	48.24	50.45	52.89	56.61	0.24	1.20	1.92	2.16	
		760		16.16	20.26	22.25	24.68	27.04	29.34	33.73	38.61	43.72	46.35	48.74	50.90	53.24	56.67	0.25	1.23	1.98	2.22	
		780		16.44	20.61	22.63	25.10	27.49	29.82	34.25	39.15	44.25	46.84	49.19	51.29	53.52	56.64	0.25	1.27	2.03	2.28	
		800		16.71	20.95	23.00	25.50	27.93	30.28	34.75	39.66	44.74	47.30	49.59	51.61	53.73	56.50	0.26	1.30	2.08	2.34	
		20	820	16.97	21.28	23.36	25.90	28.35	30.73	35.23	40.15	45.19	47.70	49.94	51.87			0.27	1.33	2.13	2.40	
			840	17.22	21.60	23.71	26.28	28.76	31.16	35.68	40.61	45.60	48.06	50.22	52.07			0.27	1.36	2.18	2.45	
			860	17.47	21.91	24.05	26.65	29.16	31.57	36.12	41.04	45.97	48.38	50.46	52.20			0.28	1.40	2.24	2.51	
			880	17.71	22.21	24.38	27.00	29.54	31.97	36.53	41.44	46.30	48.64	50.63	52.26			0.29	1.43	2.29	2.57	
			900	17.95	22.51	24.70	27.35	29.90	32.35	36.92	41.81	46.59	48.85	50.74	52.25			0.29	1.46	2.34	2.63	
			920	18.18	22.79	25.00	27.68	30.25	32.71	37.29	42.14	46.84	49.01					0.30	1.49	2.39	2.69	
			940	18.40	23.07	25.30	28.00	30.59	33.06	37.64	42.45	47.04	49.12					0.31	1.53	2.44	2.75	
			960	18.61	23.33	25.59	28.31	30.91	33.39	37.96	42.72	47.19	49.18					0.31	1.56	2.50	2.81	
			980	18.82	23.59	25.86	28.60	31.21	33.70	38.26	42.97	47.31	49.18					0.32	1.59	2.55	2.86	
			1000	19.02	23.83	26.13	28.88	31.50	33.99	38.53	43.18	47.37	49.13					0.32	1.62	2.60	2.92	
		25	1020	19.21	24.07	26.38	29.15	31.78	34.26	38.78	43.35	47.39						0.33	1.66	2.65	2.98	
			1040	19.39	24.30	26.62	29.40	32.04	34.52	39.01	43.49	47.36						0.34	1.69	2.70	3.04	
			1060	19.57	24.51	26.85	29.64	32.28	34.76	39.21	43.60	47.29						0.34	1.72	2.76	3.10	
			1080	19.74	24.72	27.07	29.87	32.50	34.97	39.38	43.67	47.16						0.35	1.75	2.81	3.16	
			1100	19.90	24.92	27.27	30.08	32.71	35.17	39.53	43.71	46.99						0.36	1.79	2.86	3.21	
			1120	20.06	25.10	27.47	30.28	32.91	35.35	39.66	43.71							0.36	1.82	2.91	3.27	
1140	20.20		25.28	27.65	30.46	33.08	35.51	39.75	43.67							0.37	1.85	2.96	3.33			
1160	20.34		25.44	27.82	30.63	33.24	35.65	39.82	43.60							0.38	1.88	3.02	3.39			
1																						

Power Ratings

optibelt VB section E/40

Nominal Power Rating P_N (kW) for β = 180° and L_d = 7180 mm



Table 55

Pulleys	v (m/s)	n _k (min ⁻¹)	Datum diameter of small pulley d _{dk} (mm)											Additional power (kW) per belt for speed ratio i				
			450	500	560	630	670	710	750	800	850	900	950	1000	1.01 to 1.05	1.06 to 1.26	1.27 to 1.57	> 1.57
Statically balanced	5	700	26.44	31.70	37.57	43.78	47.00	49.97	52.68	55.67	58.21	60.27	61.83	62.87	0.38	1.92	3.07	3.45
		950	29.78	35.30	40.95	46.07									0.52	2.60	4.16	4.68
		1450													0.79	3.97	6.35	7.14
		20	1.47	1.72	2.02	2.37	2.57	2.76	2.96	3.20	3.44	3.68	3.92	4.16	0.01	0.05	0.09	0.10
		40	2.70	3.17	3.74	4.40	4.77	5.14	5.51	5.97	6.42	6.88	7.33	7.78	0.02	0.11	0.18	0.20
		60	3.83	4.52	5.34	6.29	6.83	7.37	7.90	8.57	9.22	9.88	10.53	11.18	0.03	0.16	0.26	0.30
		80	4.90	5.80	6.87	8.10	8.80	9.50	10.19	11.05	11.90	12.75	13.60	14.43	0.04	0.22	0.35	0.39
		100	5.92	7.03	8.34	9.85	10.70	11.55	12.40	13.44	14.49	15.52	16.55	17.57	0.05	0.27	0.44	0.49
		120	6.91	8.21	9.76	11.53	12.54	13.54	14.53	15.77	16.99	18.20	19.41	20.60	0.07	0.33	0.53	0.59
		140	7.87	9.36	11.13	13.17	14.33	15.47	16.61	18.02	19.42	20.80	22.18	23.54	0.08	0.38	0.61	0.69
		160	8.80	10.48	12.47	14.77	16.06	17.35	18.63	20.21	21.78	23.33	24.87	26.39	0.09	0.44	0.70	0.79
		180	9.70	11.57	13.78	16.32	17.76	19.18	20.59	22.34	24.07	25.79	27.48	29.16	0.10	0.49	0.79	0.89
		200	10.58	12.63	15.05	17.84	19.41	20.97	22.51	24.42	26.30	28.17	30.01	31.83	0.11	0.55	0.88	0.98
		220	11.43	13.66	16.29	19.32	21.02	22.71	24.37	26.44	28.47	30.48	32.47	34.42	0.12	0.60	0.96	1.08
		240	12.27	14.67	17.51	20.76	22.59	24.40	26.19	28.40	30.58	32.73	34.84	36.93	0.13	0.66	1.05	1.18
		260	13.08	15.66	18.69	22.17	24.12	26.05	27.96	30.31	32.62	34.90	37.14	39.34	0.14	0.71	1.14	1.28
		280	13.88	16.62	19.85	23.54	25.62	27.66	29.68	32.16	34.60	37.00	39.35	41.66	0.15	0.77	1.23	1.38
		300	14.66	17.56	20.98	24.88	27.07	29.23	31.35	33.96	36.52	39.02	41.48	43.88	0.16	0.82	1.31	1.48
		320	15.42	18.48	22.09	26.19	28.49	30.75	32.97	35.70	38.37	40.97	43.52	46.01	0.18	0.88	1.40	1.58
		340	16.16	19.38	23.16	27.46	29.86	32.22	34.54	37.38	40.15	42.85	45.48	48.03	0.19	0.93	1.49	1.67
		360	16.88	20.26	24.21	28.70	31.20	33.65	36.06	39.00	41.86	44.64	47.34	49.95	0.20	0.99	1.58	1.77
		380	17.59	21.11	25.23	29.90	32.49	35.04	37.52	40.55	43.50	46.35	49.10	51.76	0.21	1.04	1.66	1.87
		400	18.28	21.94	26.23	31.06	33.75	36.37	38.93	42.05	45.06	47.97	50.77	53.47	0.22	1.09	1.75	1.97
	10	420	18.95	22.76	27.19	32.19	34.96	37.66	40.29	43.48	46.55	49.51	52.34	55.05	0.23	1.15	1.84	2.07
		440	19.60	23.54	28.13	33.29	36.13	38.90	41.59	44.84	47.97	50.96	53.81	56.52	0.24	1.20	1.93	2.17
		460	20.24	24.31	29.04	34.34	37.26	40.09	42.83	46.14	49.30	52.31	55.17	57.86	0.25	1.26	2.02	2.27
		480	20.86	25.06	29.92	35.36	38.34	41.23	44.02	47.37	50.55	53.57	56.42	59.08	0.26	1.31	2.10	2.36
		500	21.46	25.78	30.78	36.33	39.37	42.31	45.14	48.52	51.72	54.73	57.55	60.16	0.27	1.37	2.19	2.46
		520	22.04	26.48	31.60	37.27	40.36	43.34	46.20	49.60	52.80	55.79	58.57	61.11	0.28	1.42	2.28	2.56
		540	22.61	27.16	32.39	38.17	41.31	44.32	47.20	50.60	53.79	56.75	59.46	61.92	0.30	1.48	2.37	2.66
		560	23.15	27.81	33.15	39.03	42.20	45.24	48.13	51.53	54.69	57.60	60.23	62.59	0.31	1.53	2.45	2.76
		580	23.68	28.44	33.88	39.84	43.04	46.10	48.99	52.38	55.50	58.33	60.87	63.11	0.32	1.59	2.54	2.86
		600	24.19	29.04	34.58	40.61	43.84	46.90	49.79	53.14	56.21	58.96	61.39	63.48	0.33	1.64	2.63	2.95
	15	620	24.68	29.63	35.24	41.34	44.58	47.64	50.51	53.83	56.81	59.46	61.76		0.34	1.70	2.72	3.05
		640	25.15	30.18	35.88	42.02	45.27	48.32	51.17	54.42	57.32	59.85	62.00		0.35	1.75	2.80	3.15
		660	25.60	30.71	36.47	42.65	45.90	48.94	51.75	54.93	57.72	60.12	62.09		0.36	1.81	2.89	3.25
		680	26.03	31.22	37.04	43.24	46.48	49.49	52.25	55.34	58.02	60.26	62.04		0.37	1.86	2.98	3.35
		700	26.44	31.70	37.57	43.78	47.00	49.97	52.68	55.67	58.21	60.27	61.83		0.38	1.92	3.07	3.45
		720	26.84	32.15	38.06	44.27	47.47	50.39	53.02	55.90					0.39	1.97	3.15	3.55
		740	27.21	32.57	38.52	44.71	47.87	50.73	53.29	56.03					0.41	2.03	3.24	3.64
		760	27.56	32.97	38.94	45.10	48.22	51.01	53.47	56.06					0.42	2.08	3.33	3.74
		780	27.89	33.34	39.32	45.44	48.50	51.21	53.57	55.99					0.43	2.14	3.42	3.84
		800	28.19	33.68	39.66	45.73	48.72	51.34	53.59	55.82					0.44	2.19	3.50	3.94
	20	820	28.48	34.00	39.97	45.96	48.87	51.40							0.45	2.24	3.59	4.04
		840	28.74	34.28	40.23	46.13	48.96	51.38							0.46	2.30	3.68	4.14
		860	28.98	34.54	40.46	46.25	48.99	51.27							0.47	2.35	3.77	4.24
		880	29.20	34.76	40.64	46.32	48.94	51.09							0.48	2.41	3.86	4.33
		900	29.39	34.95	40.78	46.32	48.83	50.83							0.49	2.46	3.94	4.43
		920	29.57	35.11	40.88	46.27									0.50	2.52	4.03	4.53
		940	29.71	35.24	40.94	46.15									0.51	2.57	4.12	4.63
		960	29.84	35.34	40.95	45.98									0.53	2.63	4.21	4.73
		980	29.93	35.41	40.91	45.74									0.54	2.68	4.29	4.83
		1000	30.01	35.44	40.83	45.43									0.55	2.74	4.38	4.92
	25	1020	30.06	35.44	40.71	45.07									0.56	2.79	4.47	5.02
		1040	30.08	35.40	40.53	44.63									0.57	2.85	4.56	5.12
		1060	30.07	35.33	40.31	44.13									0.58	2.90	4.64	5.22
		1080	30.04	35.22	40.04	43.56									0.59	2.96	4.73	5.32
		1100	29.99	35.08	39.72	42.93									0.60	3.01	4.82	5.42
		1120	29.90	34.90	39.35										0.61	3.07	4.91	5.52
		1140	29.79	34.68	38.93										0.62	3.12	4.99	5.61
		1160	29.65	34.43	38.46										0.64	3.18	5.08	5.71
		1180	29.48	34.14	37.93										0.65	3.23	5.17	5.81
		1200	29.29	33.81	37.36										0.66	3.28	5.26	5.91
	30	1220	29.06	33.44											0.67	3.34	5.34	6.01
		1240	28.80	33.03											0.68	3.39	5.43	6.11
		1260	28.52	32.58											0.69	3.45	5.52	6.21
		1280	28.20	32.09											0.70	3.50	5.61	6.30
		1300	27.86	31.55											0.71	3.56	5.70	6.40
Where v > 30 m/s, please consult our Applications Engineering Department																		
															v (m/s)			
Dynamically balanced (for details see DIN 2211)															Pulleys			


Special Drives

V-Flat Drives




The V-flat drive comprises one grooved pulley and one flat pulley. This type of power transmission can, under certain conditions, be used for drives with intermittent loading or with a large moment of inertia. As flywheels or flat pulleys are often already present, the

costs of the drive can be reduced. When converting a flat belt drive to a V-flat drive, it will usually be economic to continue to use the flat pulley.

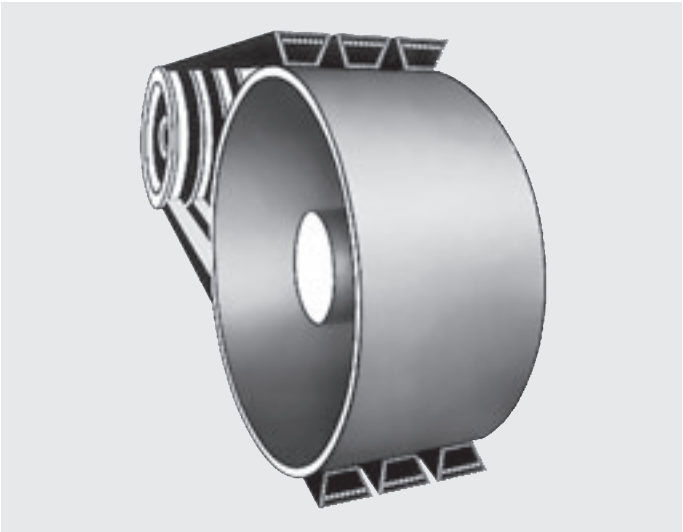

- a = drive centre distance (mm)
- b = face width of the flat pulley (mm)
- b_u = bottom width of the belt (mm)
- b_2 = face width of the grooved pulley (mm)
- D_a = outside diameter of the flat pulley (mm)
- D_Z = correction factor for determination of the theoretical diameter (mm)
- d_a = outside diameter of the grooved pulley (mm)
- d_d = datum diameter of the grooved pulley (mm)
- F_l = area of the V-belt on the flat pulley (cm²)
- f = correction factor for calculating the face width of the flat pulley (mm)
- h = height of crown per 100 mm pulley face width (mm)
- i = speed ratio
- L_{ath} = calculated outside length of the kraftband (mm)
- L_{dth} = calculated datum length of the V-belt (mm)
- p_f = specific surface pressure (N/cm²)
- P = power to be transmitted by the belt drive (kW)
- S_n = circumferential force (N)
- α = arc of contact on the flat pulley = $360^\circ - \beta$ (°)
- k_f = factor

Datum length $L_d \hat{=} \text{pitch length } L_w$

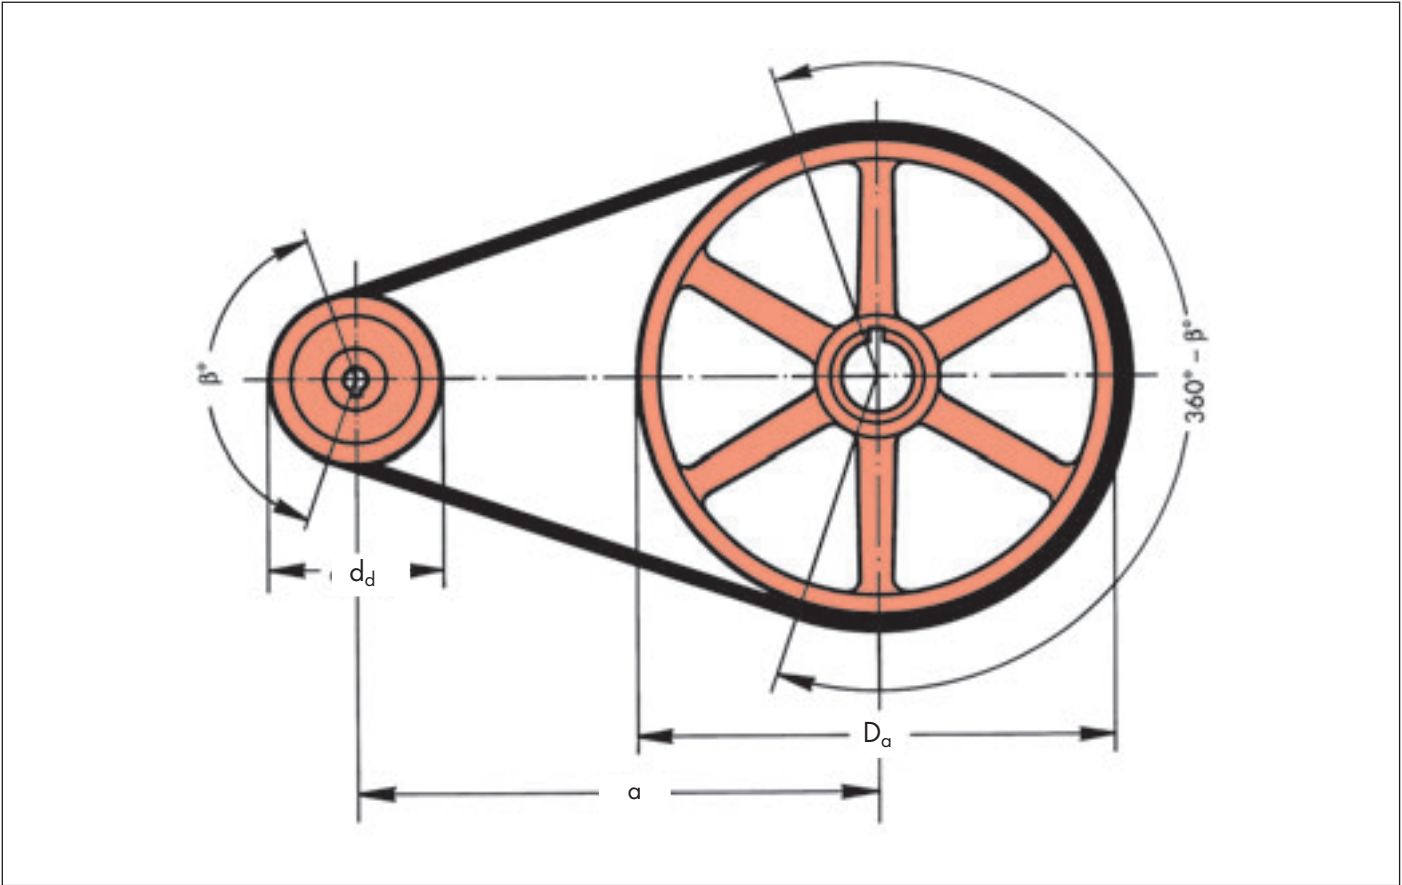

Special Drives

V-Flat Drives



Power Transmission

Calculating V-Flat Drives

The calculation of a V-flat drive uses the same method as the one set out on pages 79 to 81. In order to ensure reliability and efficiency, the V-flat belt drive must fulfil the following requirements:

- The V-grooved pulley must always be the small pulley.
- When using single belts, only classical V-belts sections Z/10, A/13, B/17, C/22, D/32, E/40 must be used.
- Wedge belts must never be used as their narrow base and larger relative height tends to make them turn on their sides and twist.
- All Optibelt KB Kraftbands – both with wedge belts or classical V-belts – are particularly suitable for this type of drive due to their single-belt-characteristic. Turning over even under extreme shock load conditions is prevented.
- V-flat drives are particularly economical when

$$kf = \frac{D_a - d_d}{a} \text{ lies between } 0.5 \text{ and } 1.15$$

The ideal drive dimensioning is achieved when $kf = 0.85$. If the kf -factor falls outside the recommended range, it is more economic to specify a normal V-belt drive.

- The following recommendations are made based on the above requirements:

	Classical V-belt	Kraftbands
Ratio	$i = \frac{D_a + D_z}{d_d} \geq 3$	$i = \frac{D_a + D_z}{d_a} \geq 3$
Drive centre distance	$a_{zul} \geq D_a$	$a_{zul} \geq D_a$
	$a = \frac{D_a - d_d}{0.85}$	$a = \frac{D_a - d_a}{0.85}$
kf-factor	$kf = \frac{D_a - d_d}{a}$	$kf = \frac{D_a - d_a}{a}$
	$0.5 \leq kf_{zul} \leq 1.15$	

- When calculating the number of belts and the belt tension, it should be noted that a special arc of contact factor c_1 must be used as shown in the following table.

Table 56: Arc of contact factor c_1 (for V-flat belt drives only)

$kf = \frac{D_a - d_d}{a}$	$\beta =$	c_1
0	180°	0.75
0.07	176°	0.76
0.15	170°	0.77
0.22	167°	0.79
0.29	163°	0.79
0.35	163°	0.79
0.40	156°	0.81
0.45	153°	0.81
0.50	150°	0.82
0.57	146°	0.83
0.64	143°	0.84
0.70	140°	0.85
0.75	137°	0.85
0.80	134°	0.86
0.85	130°	0.86
0.92	125°	0.84
1.00	120°	0.82
1.07	115°	0.80
1.15	110°	0.78
1.21	106°	0.77
1.30	100°	0.73
1.36	96°	0.72
1.45	90°	0.70

- For classical V-belts, the length is calculated using the datum length L_d and for kraftbands using the outside length L_a . Therefore, the correction factor D_z must be added to the outside diameter of the flat pulley in order to arrive at the theoretical design diameter.

Correction Factor D_z for Determination of the Theoretical Design Diameter

Classical V-belts

Section	Z/10	A/13	B/17	C/22	D/32	E/40
D_z mm	7	10	13	18	23	25

Kraftbands

Section	3V/9J	5V/15J	8V/25J	SPZ	SPA	SPB	SPC	A/HA	B/HB	C/HC	D/HD
D_z mm	13	23	41	12	15	19	26	12	20	24	35

Calculating the Datum Length for Classical V-Belts

$$L_{dth} \approx 2a + 1.57 (d_d + D_a + D_z) + \frac{(D_a + D_z - d_d)^2}{4a}$$

Calculating the Outside Length for Kraftbands

$$L_{ath} \approx 2a + 1.57 (d_a + D_a + D_z) + \frac{(D_a + D_z - d_a)^2}{4a}$$


Length conversion factors are given on pages 147/148.
Datum length $L_d \hat{=}$ pitch length L_w

Special Drives

V-Flat Drives



- The flat pulley should be cylindrical in shape. With existing flat pulleys that are to be re-used for a V-flat belt drive, the height of the crown should be checked.

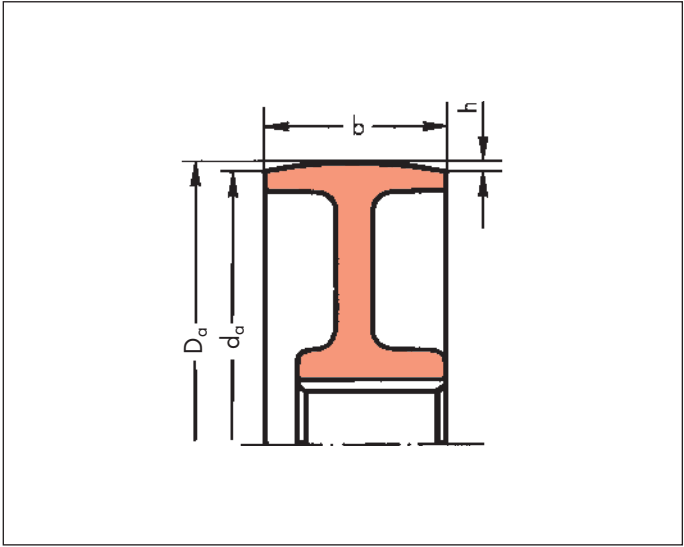

The following conditions must be met:

Maximum Crown Height

$$h_{\max} = 1 \text{ mm per } 100 \text{ mm pulley face width}$$

$$h = \frac{D_a - d_a}{2} \quad (h < h_{\max})$$

In addition, the pulley face width must be calculated or checked as shown in the following example:

Given/calculated:
 V-grooved pulley 6 grooves
 Section B/17
 Drive centre distance a 850 mm

Solution:
 $b = b_2 + f$
 $b = 120 + 35 = \mathbf{155 \text{ mm}}$

b_2 for classical V-belts, page 42 table 9.
 b_2 for kraftbands, page 46 table 15.
 f from table 57.

Choose a standard flat pulley with face width
 $b = \mathbf{160 \text{ mm}}$.

Table 57: Factor f for determining the face width of the flat pulley

Z/10, SPZ, A/13/HA, 3V/9J		SPB 5V/15J		C/22/HC, SPC		D/32/HD, 8V/25J		E/40	
a	f	a	f	a	f	a	f	a	f
< 500	20	< 750	25	< 1000	30	< 1250	40	< 1750	45
500-750	25	750-1000	35	1000-1250	40	1250-1750	50	1750-2250	60
> 750	30	> 1000	40	> 1250	50	> 1750	65	> 2250	75

Calculation of the Specific Surface Pressure on the Flat Pulley

Calculation of the effective belt tension S_n (N)

$$S_n = \frac{P \cdot 1000}{v}$$

Surface pressure on flat pulley p_f (N/cm²)*

$$p_f = \frac{S_n}{F_1}$$

Area of belt contact on flat pulley F_1 (cm²)

$$F_1 = \frac{D_a \cdot \pi \cdot \alpha \cdot b_u \cdot z}{36000}$$

Recommended surface pressure p_f (N/cm²)*

$$p_f \leq 4 \text{ N/cm}^2^*$$

* 10 N/cm² = 1 Bar = 10⁵ Pascal

Formula:

Calculating the static belt tension for V-flat belt drives T (N)

$$T = \frac{500 \cdot (2.25 - c_1) \cdot P_B}{c_1 \cdot z \cdot v} + k \cdot v^2$$

In addition to the calculation method set out on pages 79 to 81, the static belt tension for V-flat belt drives must be calculated according to the formulae shown here.

Special Drives

Tension/Guide Idlers



Idlers are grooved or flat pulleys that do not transmit any power in a drive system. As they also generate additional bending stresses in the belt, they should be employed sparingly and, where possible, confined to the following situations:

- with fixed drive centres, in order to produce the required tension and to take up the maximum possible belt stretch and wear,
- as damping and guide idlers on very long, unsupported spans. Belts on such drives tend to vibrate more than normal and even to turn over in the pulley grooves,
- as outside idlers where the arc of contact on one of the loaded pulleys is too low. Their inclusion increases the arc of contact and often reduces excessive slip or eliminates the need to increase the number of belts,
- as guide idlers on drives where the pulleys are not all on the same plane such as quarter turn drives,
- to guide belts past obstructions,
- as pneumatically, hydraulically or spring loaded idlers to maintain an even, constant tension,
- as clutching idlers with which the driven pulley can be engaged or disengaged. Complex clutches are no longer required. Because of their single belt characteristics, Optibelt KB Kraftbands are particularly suited to these applications.

If, for the reasons listed above, it is absolutely essential to employ idlers, the following criteria must be observed when designing the drive:

- idler configuration,
- position of the idler in the belt span,
- idler diameter,
- idler shape,
- allowance for idler travel for fitting and for initial and subsequent tensioning of the belt,
- correction of the power rating P_N .

Idler Configuration

In principle, idlers can be used internally or externally depending upon the drive situation.

Unless design requirements call for an outside idler, the inside idler is usually more advantageous. Its diameter can be kept smaller than that of the outside idler.

Depending upon the type of belt, **inside idlers** can either take the form of a grooved or flat pulley.

Table 58: Section dimensions

Belt type	Grooved pulley	Flat pulley
High performance wedge belts BS 3790/DIN 7753 Part 1 SPZ; SPA; SPB; SPC	●	
High performance wedge belts USA Standard RMA/MPTA 3V/9N; 5V/15N; 8V/25N	●	
Classical V-belts BS 3790/DIN 2215 Z/10; A/13; B/17; 20; C/22; 25; D/32; E/40	●	●
Kraftbands with high-performance wedge belts 3V/9J; 5V/15J; 8V/25J; SPA; SPZ; SPB; SPC	●	●
Kraftbands with classical V-belts A/HA; B/HB; C/HC; D/HD	●	●

For raw edge V-belts and kraftbands the same requirements as in table 58 are valid.

Inside idlers reduce the arc of contact on the loaded pulleys and with it the arc of contact correction factor c_1 . When calculating the number of belts, the arc of contact correction factor should be selected for the position of the idler at the point of maximum belt stretch (see Table 60, page 117).

Outside idlers must always take the form of flat pulleys as they run on the back of the belt. They increase the arc of contact. Care must be taken to ensure however that the maximum possible belt stretch is taken up and that contact with the opposite span is prevented. The reverse bending caused when outside idlers are used can lead to a reduction of the belt service life.

Special V-belt constructions upon request!

Special Drives

Tension/Guide Idlers




Position of the Idler in the Belt Span

Theoretical power transmission formulae and indeed practice has shown that idlers should, wherever possible, be placed in the slack side of the drive. The tension idler force can then be very significantly reduced. A spring loaded idler must not be employed in a reversing drive as the slack and tight sides of the drive are constantly changing.


Our Applications Engineering Department will be pleased to assist in the design where spring loaded idlers present special problems.

Fig. 1

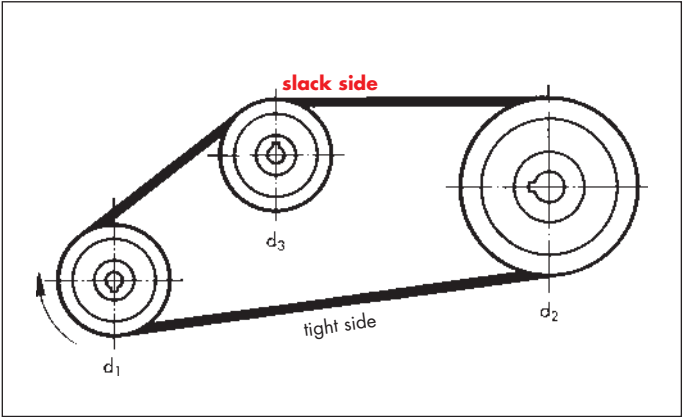


Grooved pulleys can be used as inside idlers anywhere on the slack side. Where possible, however, the arc of contact should be the same on both pulleys when the idler reaches its limit position, i.e. belt stretch is at its maximum.

Fig. 2

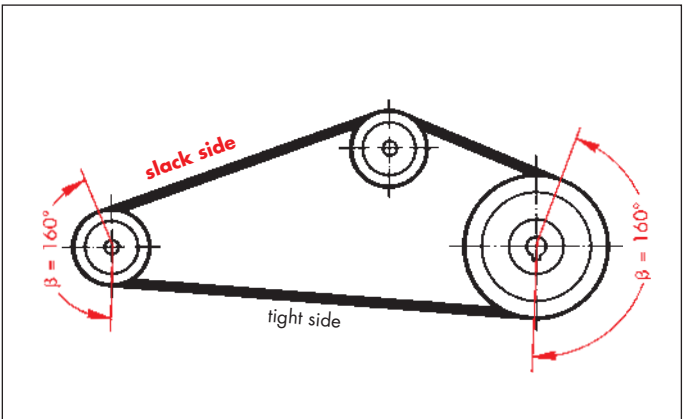

Flat pulleys, whether used as inside or outside idlers, are to be placed as far as possible away from the grooved pulley on to which the belt runs next. Any alignment errors between the idler and the pulley and the resultant sideways movement of the belt on the pulley are thus avoided.

Fig. 3

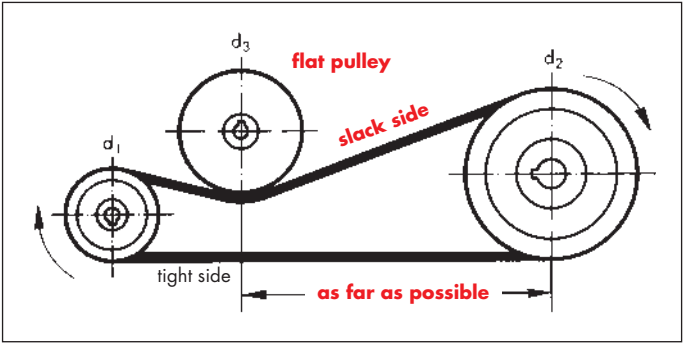

On drives with long belt spans grooved pulleys are the preferred choice for inside idlers because with flat pulleys transverse vibrations and belt turnover can occur.

Minimum Diameter for Inside Idlers

Inside idler $\geq$ smallest loaded pulley in the drive system or smallest permissible pulley diameter for the section used.

Minimum Diameter for Outside Idlers

Outside idler ≥ 1.35 times the smallest loaded pulley in the drive system

Exceptions:

Section	Diameter of the smallest loaded pulley in the drive (mm)	Minimum diameter of the outside idler (mm)
Z/10	56-63	90
A/13	71-90	125
SPZ, 3V/9N	63-90	125
SPA	90-112	150

The belt service life is significantly reduced if the minimum recommended idler diameter is less than the size recommended. The use of an Optibelt special construction can significantly improve service life.

Idler Design

Grooved pulleys which are used as idlers can normally have standard groove dimensions. On drives subject to severe vibration and with long drive centre distances, it is recommended that deep grooved pulleys be employed.

Flat pulleys should, where possible, be cylindrical and not crowned. Flanged pulleys are recommended as belt guides. The corners formed by the contact surface and pulley flange should be sharp. Round edges encourage the belt to run up on the flanges causing turn over.

Special Drives

Tension/Guide Idlers



The face width or the contact surface between the two flanges is calculated as follows:

$$b = b_2 + m$$

b

= face width / contact surface

(mm)

b_2

= face width of the grooved pulley

(mm)

m

= additional value

(mm)

Section	Additional value m (mm)
SPZ, 3V/9N, Z/10	15
SPA, A/13	20
SPB, 5V/15N, B/17	25
SPC, C/22	30
8V/25N	35
D/32	40
E/40	45

also applies for raw edge V-belts

Drive Calculation

Calculating the length and determining the number of belts is basically the same as for two pulley drives. Certain details are, however, to be noted:

1. Calculate the belt length over two pulleys using the formula: see notes on standards page 67, 143/144.

$$L_{dth} \approx 2a + 1.57 (d_{dg} + d_{dk}) + \frac{(d_{dg} - d_{dk})^2}{4a}$$


2. If the belt has to be fitted with a fixed drive centre distance, double the adjustment y must be added to the belt length L_{dth} (see pages 76 to 78).

$$L_d = L_{dth} + 2 y$$

3. The next largest standard length L_{dSt} should then be selected. A check should be made, usually on the drawing, to determine whether the belt can be adequately tensioned with the idler in the outermost position. In this idler position, both the standard length L_{dSt} and double the adjustment x must be taken up (see pages 76 to 78).

$$L_d \text{ for idler end position} = L_{dSt} + 2 x$$

Fig. 4

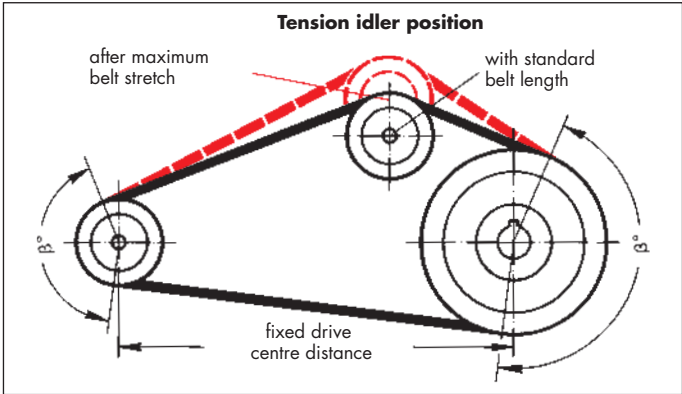

Number of Belts

The application of idlers increases the bending stress in the belts. To avoid a reduction in belt service life, the idler correction factor c_4 must also be included in the calculation. This correction factor takes the number of idlers into consideration whilst maintaining the minimum diameter.

Table 59

Number of idlers	c_4
0	1.00
1	0.91
2	0.86
3	0.81

The nominal power rating P_N per belt is, as before, based on the smallest loaded pulley.

Calculation of the arc of contact correction factor c_1 must be based on the smallest contact angle of the loaded pulley which occurs when the belt is stretched to its maximum limit.

Table 60: Arc of contact correction factor c_1

$\beta =$	c_1	$\beta =$	c_1
75°	0.82	175°	1.00
80°	0.84	180°	1.00
85°	0.86	185°	1.00
90°	0.88	190°	1.00
95°	0.90	195°	1.01
100°	0.91	200°	1.01
105°	0.92	205°	1.01
110°	0.93	210°	1.01
115°	0.94	215°	1.01
120°	0.95	220°	1.01
125°	0.96	225°	1.01
130°	0.96	230°	1.01
135°	0.97	240°	1.02
140°	0.97	250°	1.02
145°	0.98		
150°	0.98		
155°	0.99		
160°	0.99		
165°	0.99		
170°	1.00		

The following formula for determining the number of belts is obtained using the idler correction factor c_4

$$z = \frac{P \cdot c_2}{P_N \cdot c_1 \cdot c_3 \cdot c_4}$$

Special Drives

Twist Drives



Power Transmission

Drives in which the belt run is transposed are often simply termed "twist" drives. These can be drives where the shafts are not parallel, whose pulleys and idlers are not all arranged on one plane, or drives with two parallel but counter rotating shafts. Because of the twisting of the belt, this type of drive requires a certain degree of lateral bending flexibility. The cross section of the V-belt is better suited for this purpose than the flat belt. In most applications twist drives use only single V-belts, but drives using belt sets are possible. The crossing of the belt spans and the non-aligned entry of the belt into the pulley leads to a reduction of the belt service life.

The entry and exit angle between the belt and the pulley plane should not be more than 5° . The required inclination of the shafts and the pulleys relative to each other and the belt entry and exit angles should be confirmed by practical tests. In addition, certain critical drives may have a considerably improved safety factor if Optibelt special constructions are used.

The most important types of twist drives and the associated design guidelines are illustrated in the following text.


Quarter Twist Drive

The term quarter twist drive is used to describe systems where the shafts are at a 90° angle to each other.


The ratio i or $1:i$ on quarter twist drives should not be greater than 2.5.

Where this is not possible, a two stage drive should be employed, in which one stage takes the form of a standard V-belt drive.

Quarter Twist Drive Ratio i or $1:i < 2.5$

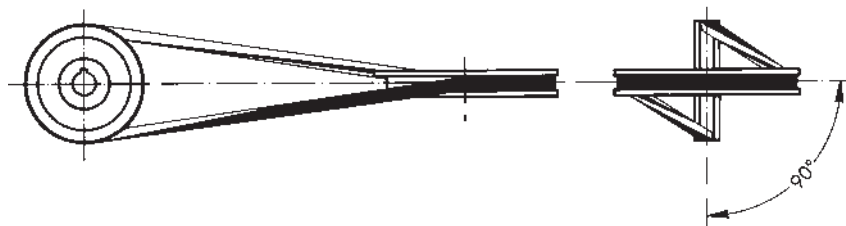

Quarter Twist Drive Ratio i or $1:i > 2.5$

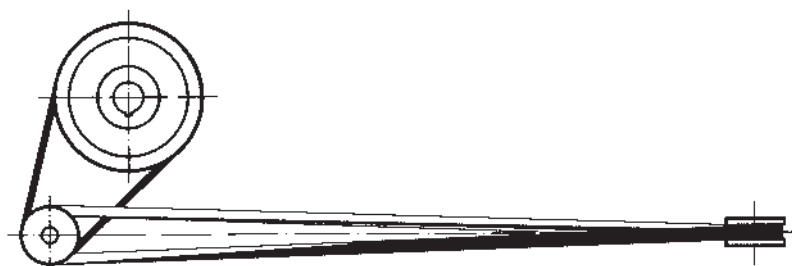


Special Drives

Twist Drives



Design Guidelines for Quarter Twist Drives

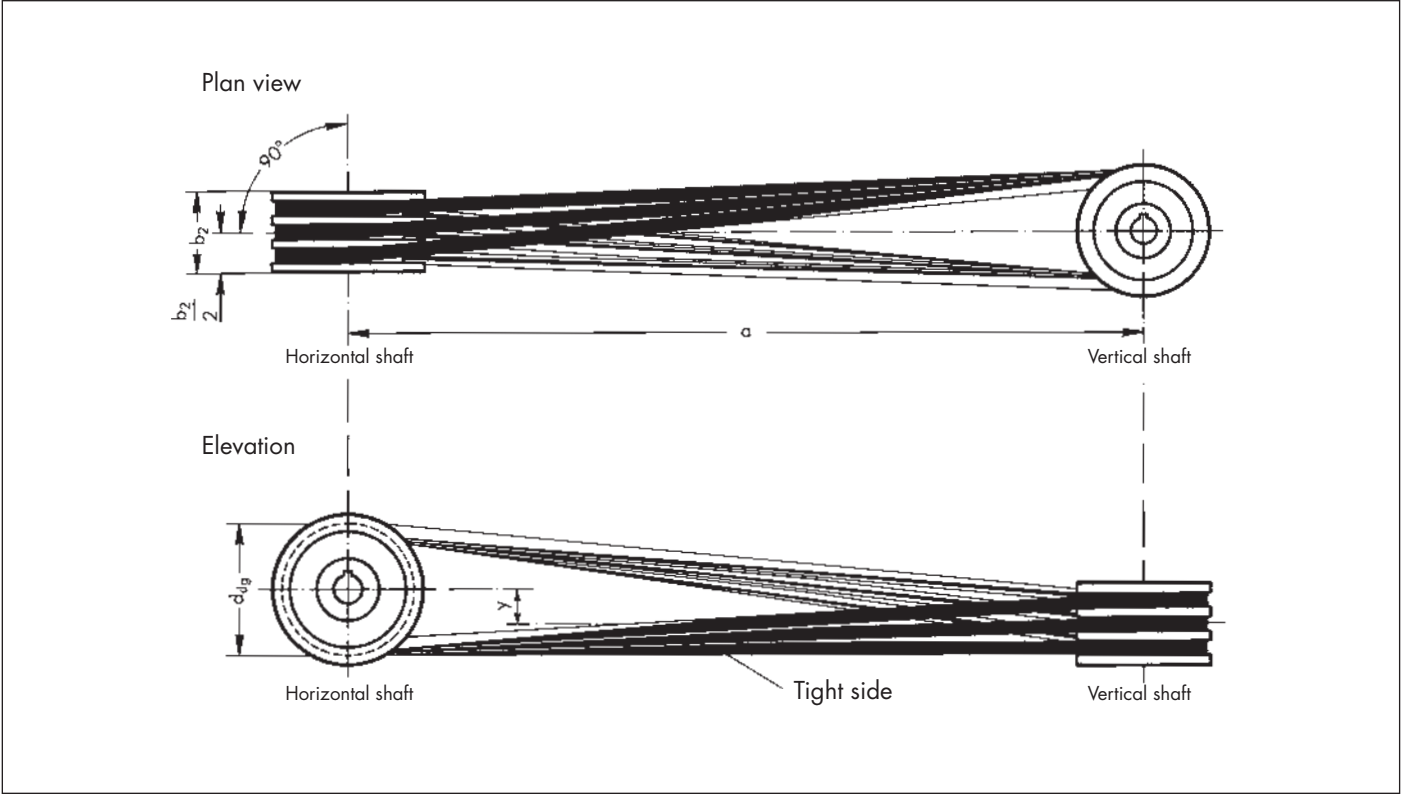

1.

$$a_{min} = 5.5 (d_{dg} + b_2)$$
2.

The drive must be aligned so that a straight line drawn through the centre of the vertical shaft runs through the centre of the face b_2 of the pulley on the horizontal shaft (plan). The horizontal shaft must be at right angles to this straight line.
3.

The horizontal centre line of the pulley on the horizontal shaft must be above and at a distance y_1 from the centre line of the pulley on the vertical shaft (elevation). The distance y_1 changes with the drive centre distance "a".
4.

The direction of rotation must be arranged so that the tight side S_1 is at the bottom.
5.

Deep grooved pulleys should be specified where possible for single belt drives. This ensures an improved entry and exit of the belt, thus preventing turnover.
6.

Never specify deep grooved pulleys when using kraftbands. Kraftband pulleys should always be used. We recommend, in any case, that our Applications Department be consulted.
7.

When calculating the number of belts, the example given on pages 79 to 81 should be followed. An arc of contact correction factor $c_1 = 1$ must always be used.
8.

The static belt tension "T" should be calculated using the formula on page 114.
9.

The drive centre distance must be adjustable so that the belt can be fitted without force, the necessary tension applied, and the belt stretch and wear taken up during its service life.

Table 61

Drive centre distance a (mm)	y ₁ (mm) Classical V-belts	y ₁ (mm) Wedge belts
1200 ≤ 1500	5	–
> 1500 ≤ 2000	8	5
> 2000 ≤ 2500	12	8
> 2500 ≤ 3000	17	10
> 3000 ≤ 3500	25	15
> 3500 ≤ 4000	35	25
> 4000 ≤ 4500	45	30
> 4500 ≤ 5000	55	40
> 5000 ≤ 5500	65	45
> 5500 ≤ 6000	80	55
> 6000	100	65

Special Drives

Twist Drives




Eighth twist drives

Eighth twist drives are seldom required. The shafts in this drive system are at an angle of 45° relative to each other.

Design Guidelines


- 1. $a_{min} = 4 (d_{dg} + b_2)$
- 2. Otherwise the design guidelines for quarter twist drives are applicable.

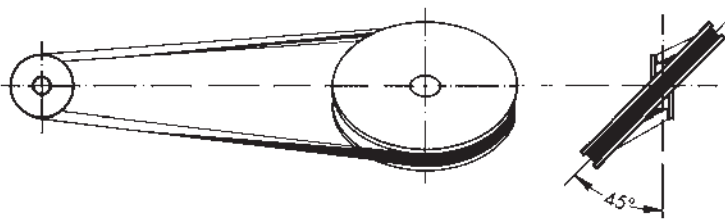

Drives with 180° Twist

The drive and the driven shafts are, as with conventional drives, parallel to each other. The belt is twisted through 180° so that both

spans cross. A change in direction is thus achieved at very little cost.

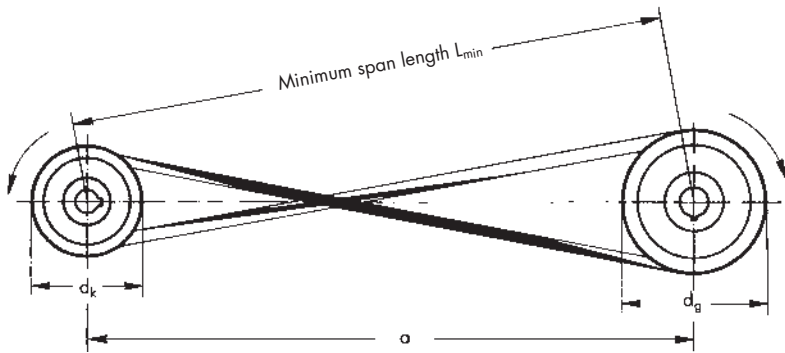

Design Guidelines

- 1. In order to guarantee the perfect running of the belts in the pulley grooves, the belt span length used must not be less than the minimum set out in the following table.

Table 62

Section	Minimum span length L_{min} (mm)
SPZ, 3V/9N	350
SPA	400
SPB, 5V/15N	450
SPC	600
8V/25N	700
A/13	460
B/17	560
C/22	720
D/32	940
E/40	1150

- 2. As far as possible, the crossover point of the belt should be arranged in the centre of the belt spans. The rubbing of the belt spans against each other is at a minimum at this point. In order to avoid contact completely, it is recommended that a guide pulley be placed in the slack side S_2 near the crossover point.

- 3. Length calculation

$$L \approx 2a + 1.57 (d_g + d_k) + \frac{(d_g + d_k)^2}{4 a}$$

- 4. Otherwise the design guidelines as detailed in points 4 to 9 for quarter twist drives are applicable.

◀ these values also apply for raw edge belts

Special Drives

Drive Belts with Aramid Tension Cord



Aramid is an organic polyamide fibre that is manufactured by a complex chemical process. It may be used wherever maximum stress and reliability is required. The processing of this fibre requires the highest level of experience and know-how as well as sophisticated testing facilities. Aramid is used as the tension cord material for highly loaded V-belts and kraftbands.

Construction and Properties

Compared to materials customarily used for tension cords e.g. polyesters, Aramid is noted for its extremely low stretch properties. Its tensile strength is almost double that for the same thickness of standard fibre.


	Tensile strength (cN/tex)	Total extension at fracture (%)	Tension 2 % (cN/tex)
Polyester	81	14	15
Aramid	190	4	73

cN = centiNewton Fibre weight: 1 tex = 1 g/1000 m

Despite its extreme stability, this fibre is remarkably flexible and possesses sufficient elasticity to absorb shock loading or vibration.

These properties, which are of special importance for V-belts and kraftbands, result in huge improvements in comparison to conventional constructions.

Optibelt V-belts in Aramid cord construction comprise:

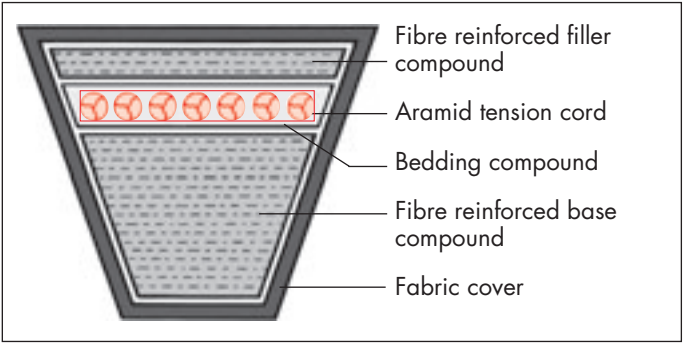

The high grade, specially processed Aramid tension cord is embedded in a rubber compound. It is effectively supported by a filler and base of polychloroprene and natural rubber compounds containing transversely arranged fibres. The fabric cover is treated on both sides with a rubber compound and completely envelops the V-belt.

Applications

The advantages of Optibelt V-belts and kraftbands that use Aramid tension cords are of special benefit where

- high power transmission levels are called for,
- there are limitations on the drive width,
- the adjustment available for tensioning is minimal,
- the drive is exposed to high temperatures.

Thus, with the same number of belts and unchanged drive parameters, significantly higher power levels can be transmitted without reducing the service life of the belts. Even drive designs that have previously had to be classified as critical may now be considered as risk free. Service factors are improved; minimal belt stretch results in virtually maintenance free running.


For these reasons that Optibelt V-belts and kraftbands with Aramid tension cord are to be found on drives with exceptional loading requirements –

- on critical drives in industrial engineering applications,
- on special machines,
- on agricultural machinery and
- on horticultural machinery.

Attention:

For 2-pulley drives

A discussion of all the relevant criteria would be beyond the scope of this manual. We therefore recommend that you contact our Applications Engineering Department to discuss your specific problems.

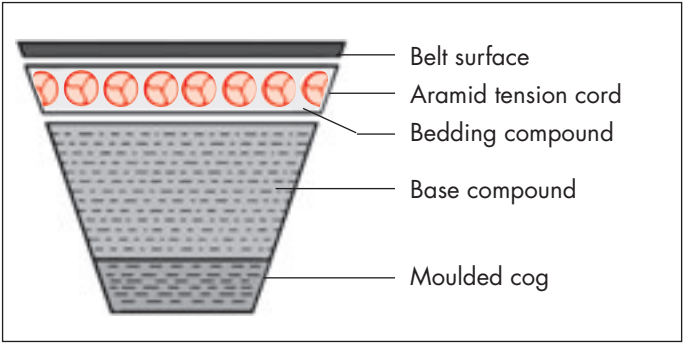

Special applications can also be designed with raw edge V-belts and kraftbands employing Aramid tension cords.

Drive Calculation

Calculation must follow the example given on pages 79 to 81.

Please ask for the details of the higher power ratings.

Special Drives

Drive Belts with Aramid Tension Cord



Diagram 6


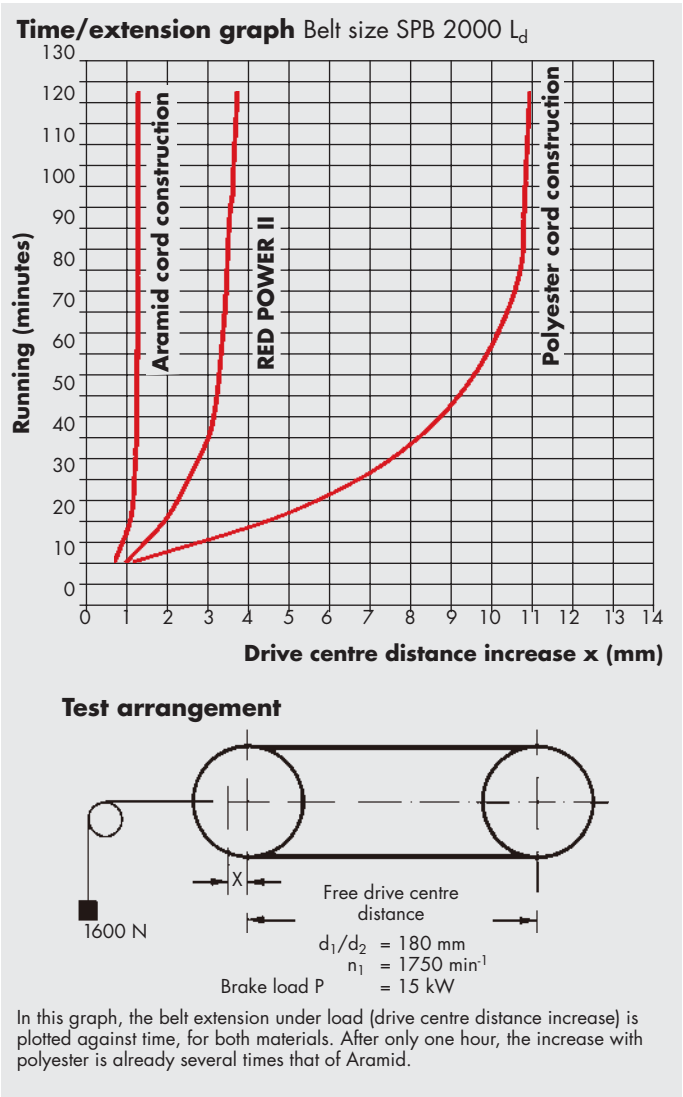


Diagram 7

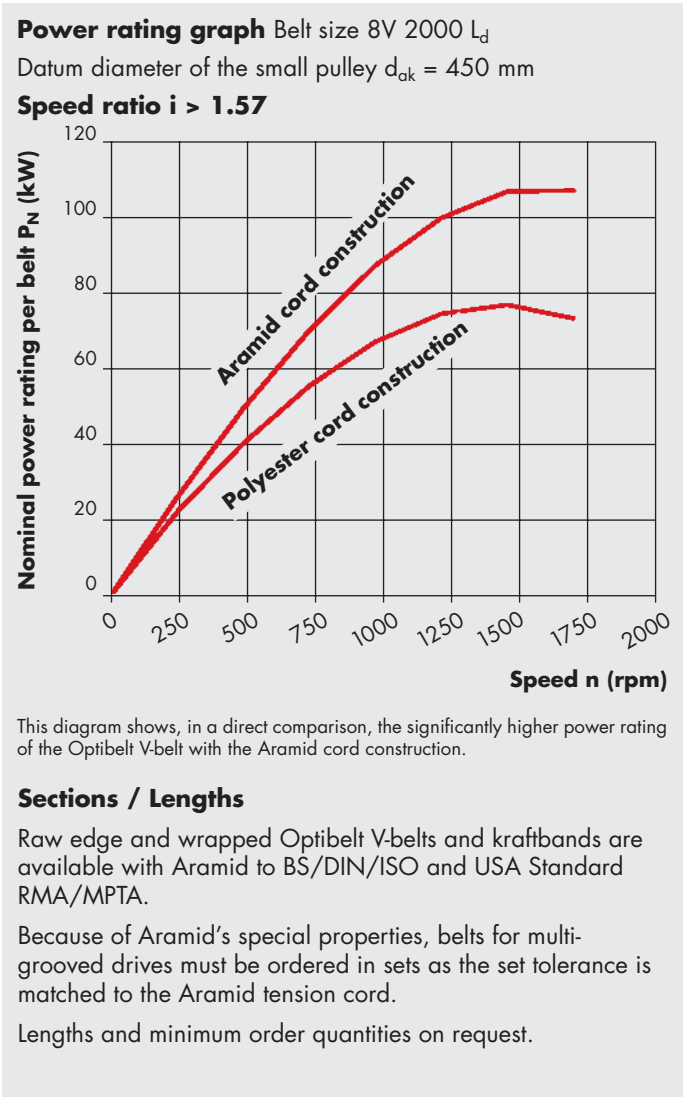

Section	Lengths		Range
V-Belts			As per the Optibelt standard range
SPZ	≥ 1000 L _w	≤ 3550 L _w	
SPA	≥ 1000 L _w	≤ 4500 L _w	
SPB	≥ 1250 L _w	≤ 8000 L _w	
SPC	≥ 2000 L _w	≤ 12500 L _w	
3V/ 9N	≥ 3V 400 / 9N 1016 L _a	≤ 3V 1400 / 9N 3556 L _a	
5V/15N	≥ 5V 500 / 15N 1270 L _a	≤ 5V 3550 / 15N 9017 L _a	
8V/25N	≥ 8V 1000 / 25N 2540 L _a	≤ 8V 5000 / 25N 12700 L _a	
Kraftbands			
3V/ 9J	≥ 3V 500 / 9J 1270 L _a	≤ 3V 1400 / 9J 3556 L _a	
5V/15J	≥ 5V 500 / 15J 1270 L _a	≤ 5V 3550 / 15J 9017 L _a	
8V/25J	≥ 8V 1000 / 25J 2540 L _a	≤ 8V 4750 / 25J 12065 L _a	
Further sections and lengths and minimum quantities on request			

Design Hints

Belt Tension for **optibelt** V-Belts



The correct level of belt tension has a direct and crucial bearing on the trouble free transmission of power and the achievement of acceptable belt service life. Belt tension which is either too high or too low often results in premature failure. Belts which are over tensioned sometimes cause damage to the bearings on the driver or driven units.

Experience has shown that the more common tensioning methods, e.g. the "thumb pressure method" do not ensure tension settings that would enable drives to be operated at optimum efficiency. It is therefore recommended that the required static belt tension "T" be calculated for each drive using the Optibelt formulae. This tension is the lowest possible required by a drive to transmit the highest power level from the drive, taking account of the normal amount of slip.

Once the belt has been fitted and the initial tension applied, it should be checked using an Optibelt tension gauge. The belt should be monitored regularly during the first few hours of operation. Experience has shown that the first retensioning should be undertaken after approximately 30 minutes to four hours running under full load. This takes up the initial belt stretch and "bedding in" to the pulley grooves.

After approximately 24 hours of operation, it is often advisable to check the drive and retension the belts if necessary, particularly when not continuously run under full load. The time between checks can then be significantly increased. Our installation and maintenance advice on pages 132-133 should be observed.

An over or under tensioning of the drive will be avoided if the belt tension is calculated, set and checked using one of the following methods:

I. Checking the Belt Tension by Span Deflection


This method provides an indirect measurement of the calculated or actual static belt tension. It is applicable for belt sections SPZ, SPA, SPB, SPC, 3V/9N, 5V/15N, Z/10, A/13, B/17, 20, C/22, 25, D/32, XPZ, XPA, XPB, XPC, 3VX, 5VX, ZX/X10, AX/X13, BX/X17, CX/X22.

E	= belt deflection per 100 mm span length	(mm)
E _a	= belt deflection for a given span length	(mm)
f	= load used to set belt tension	(N)
k	= constant for calculation of centrifugal force	
L	= drive span length	(mm)
S _a	= minimum static shaft load	(N)
T	= minimum static tension per belt	(N)

1. Calculate the static belt tension using the following formula:

$$T \approx \frac{500 \cdot (2.02 - c_1) \cdot P_B}{c_1 \cdot z \cdot v} + k \cdot v^2$$

When first fitted, the belt should be tightened to 1.3 x T i.e 30 % higher than the calculated belt tension.

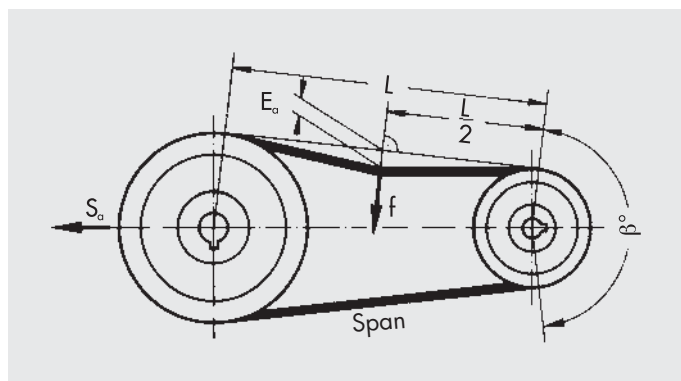

2. Determine the belt deflection per 100 mm span length E from the belt tension/deflection graphs diagrams 8 to 11.
3. Calculate the belt deflection for a given span length E_a for the actual drive span length

$$E_a \approx \frac{E \cdot L}{100}$$

$$L = a_{nom} \cdot \sin \frac{\beta}{2}$$

Apply the load to set belt tension T (taken from diagrams 8 to 11 for the appropriate belt section) to the centre of, and perpendicular to, the span, as shown in the illustration above. Measure the deflection and if necessary adjust the centres until the correct belt tension is achieved.

II. Checking Belt Tension by Speed Measurement

This method checks belt tension using the theoretical slip. The speeds of the driver and the driven pulleys are measured first in an unloaded condition and then under load.

S	= slip	(%)
n _{1L}	= driver pulley speed, no load	(rpm)
n _{2L}	= driven pulley speed, no load	(rpm)
n _{1B}	= driver pulley speed, under load	(rpm)
n _{2B}	= driven pulley speed, under load	(rpm)

Formula for calculating the slip:

$$S = \left(1 - \frac{n_{1L}/n_{2L}}{n_{1B}/n_{2B}}\right) \cdot 100$$

At the rated loading, the slip should not exceed 1 %. The belt service life is considerably shortened due to excessive flank wear and over heating when tension is too low and slip ensues under load.

Design Hints

Belt Tension for **optibelt** V-Belts and Kraftbands



Diagram 8: Belt tension graphs for Optibelt SK wedge belts to BS 3790 and DIN 7753 Part 1


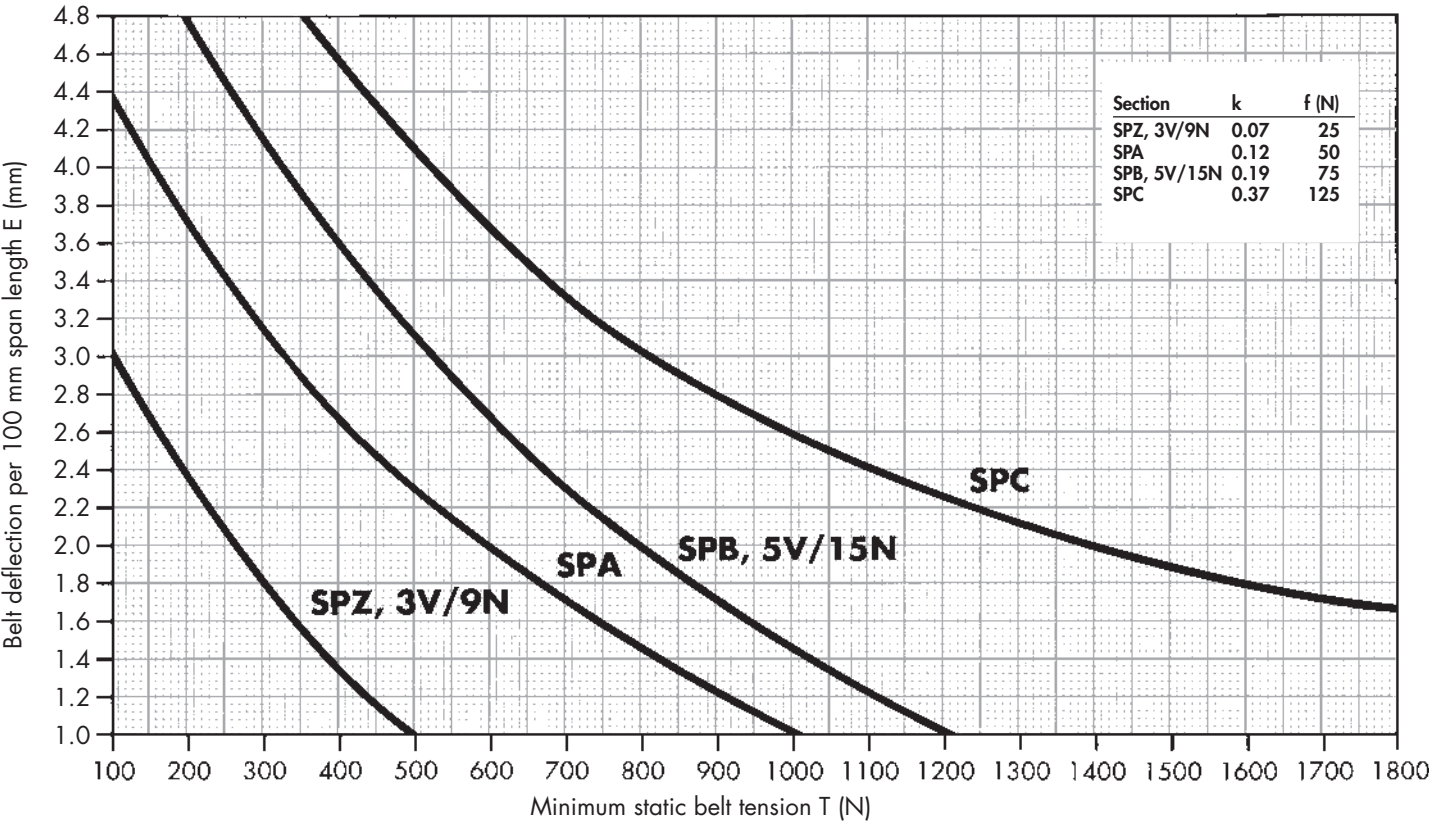


Diagram 9: Belt tension graphs for Optibelt VB classical V-belts to BS 3790 and DIN 2215

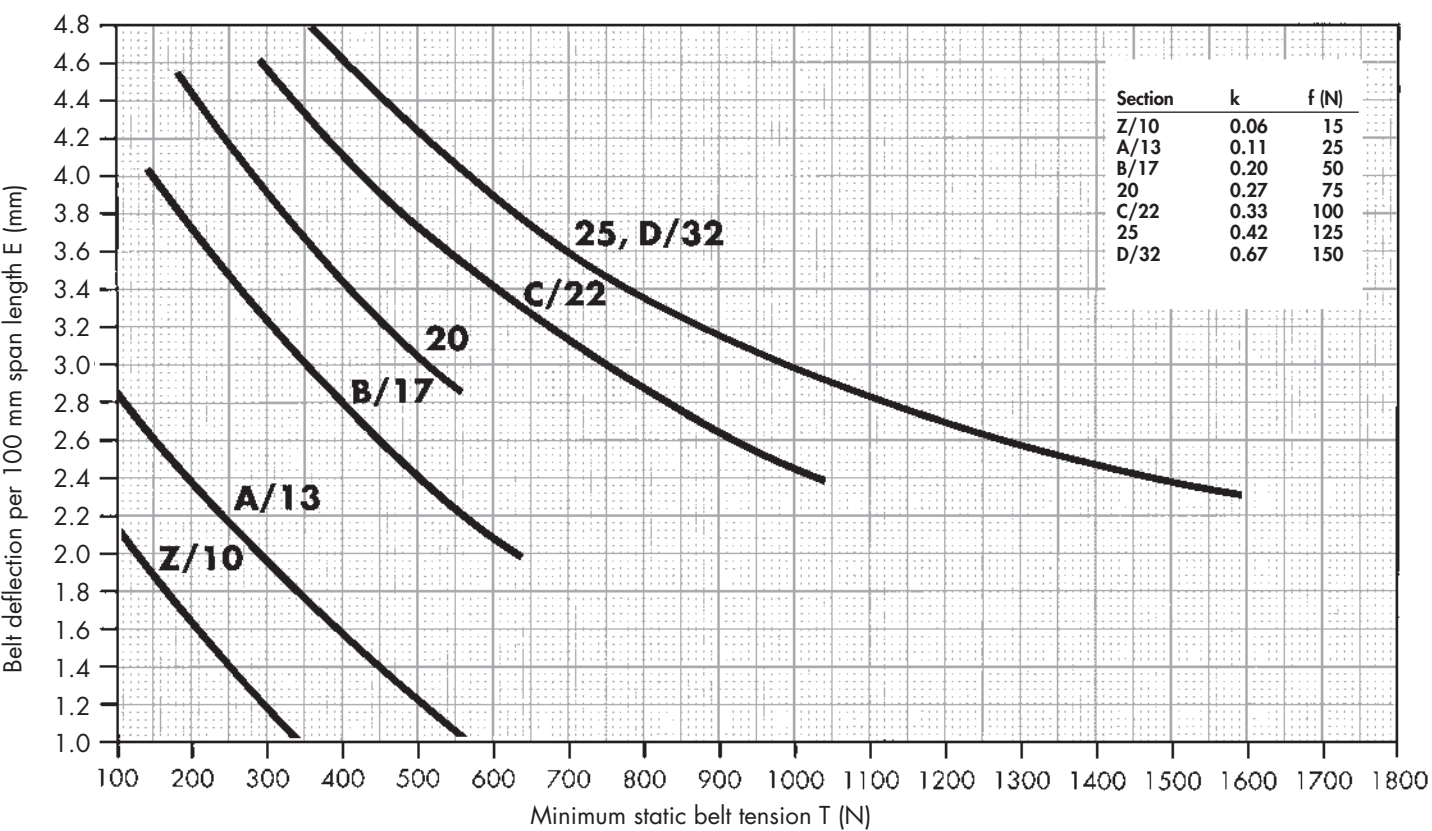

Design Hints

Belt Tension for **optibelt** V-Belts and Kraftbands



Diagram 10: Belt tension graphs for Optibelt Super X-POWER M=S wedge belts – raw edge, moulded cogged –


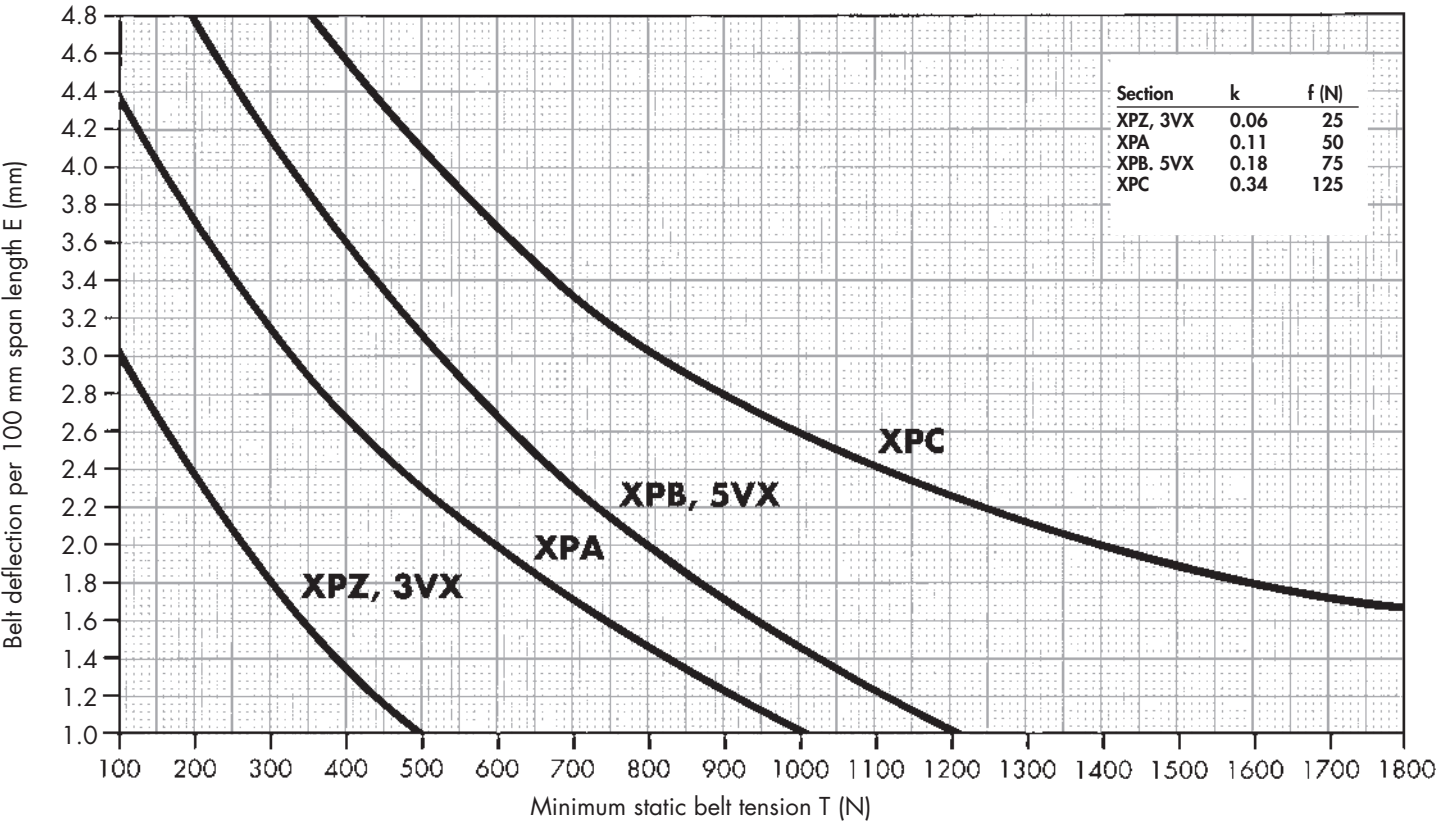


Diagram 11: Belt tension graphs for Optibelt SUPER TX M=S V-belts – raw edge, moulded cogged –



Design Hints

Belt Tension for **optibelt V-Belts** and **optibelt KB Kraftbands**

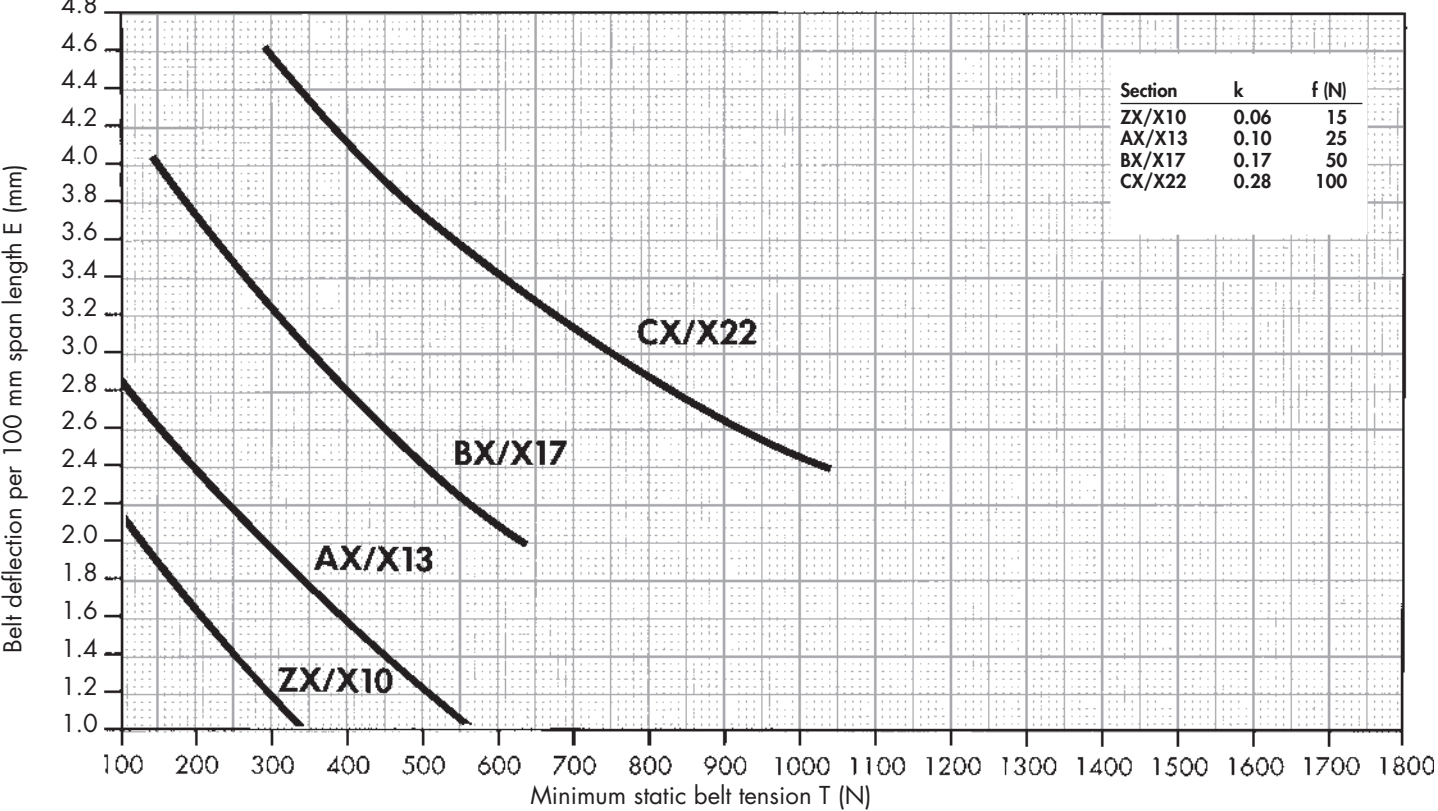

III. Belt Tensioning Using a "Length Additional Value"

It has become evident that span deflection methods are not ideal for checking the tension of kraftbands of all sections, and of individual belts. The following, very simple method for the setting and checking of belt tension is therefore recommended:

1. Calculate the static belt tension "T".

$$T \approx \frac{500 \cdot (2.02 - c_1) \cdot P_B}{c_1 \cdot z \cdot v} + k \cdot v^2$$

2. Measure the setting length "M" of the Kraftband or the single belt, whilst slack. The belt can be measured when fitted to the drive provided that it is completely **without** tension.
3. Procedure
 - a) Fit the kraftband or the single belt on to the pulleys. Provisionally tighten the belt in order to seat it into the pulley grooves.
 - b) Next completely slacken the kraftband or the single belt.
 - c) Mark two lines on the top of the belt, distance "M" apart. The lines must be marked on the free span length, not where the belt is on the pulleys ("M" should ideally be 1000 mm minimum or a multiple but in any case should be as long as possible).

Important: The longer the measured section, the more accurate the tension setting will be.

4. Calculate the length additional value "A" using the formula

$$A = \frac{M \cdot R}{1000}$$

R = stretch factor from Table 63, page 127

5. Tighten the kraftband or the single belt until the distance "M" is increased by the value "A". The drive will now be correctly tensioned.
6. If the drive is to be retensioned, the belt must first be slackened off again so that "M" can be marked completely without tension. The procedure described under paragraphs 3. to 5. above must then be repeated.

Note: The tension set will be more accurate if the drive is rotated 2 or 3 times to settle the belts into the pulley grooves before finally accepting the value M + A.

Example:

$$\begin{aligned} P_B &= 1136 \text{ kW} \\ c_1 &= 0.97 \\ v &= 25.91 \text{ m/s} \end{aligned}$$

Drive arrangement with one set comprising:
2 Optibelt KB Kraftbands 4-8V 3750/25J 9525 L_a
2 Optibelt KB Kraftbands 5-8V 3750/25J 9525 L_a

$$T \approx \frac{500 \cdot (2.02 - 0.97) \cdot 1136}{0.97 \cdot 18 \cdot 25.91} + 0.69 \cdot 25.91^2 = 1782 \text{ N}$$

Where "M" is 4000 mm

$$A = \frac{4000 \cdot 5.4}{1000} = 21.6 \text{ mm}$$

Tighten the kraftband until the lines marked on the top surface are "M" plus the length additional value apart. This will set the correct tension.

When the belt is first installed the belt tension must be multiplied by 1.3.

Design Hints

Belt Tension for **optibelt V-Belts**

and **optibelt KB Kraftbands**



Table 63: Length addition per 1000 mm belt length

Section Kraftband		3V/9J	5V/15J	8V/25J	SPZ	SPA	SPB	SPC	A/HA	B/HB	C/HC
Single belt		3V/9N	5V/15N	8V/25N	SPZ	SPA	SPB	SPC	A/13	B/17	C/22
Minimum static belt tension per rib/single belt T (N)		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
	50	0.8			0.8	0.8			0.8		
	75	1.2			1.2	1.0			1.0		
	100	1.6			1.6	1.3			1.3		
	125	2.1			2.1	1.6			1.6		
	150	2.6			2.6	1.9			1.9	0.8	
	175	3.0			3.0	2.2			2.2	0.9	
	200	3.5			3.5	2.5			2.5	1.1	
	225	4.0			4.0	2.8			2.8	1.2	
	250	4.5			4.5	3.0			3.0	1.4	
	275	4.9			4.9	3.3			3.3	1.5	
	300	5.3	1.3		5.3	3.6	1.3		3.6	1.6	1.6
	350	6.4	1.7		6.4	4.2	1.7		4.2	1.8	1.8
	400	7.6	2.0		7.6	4.7	2.0		4.7	2.0	2.1
	450	8.7	2.4		8.7	5.3	2.4		5.3	2.2	2.3
	500	10.0	2.7		10.0	5.8	2.7		5.8	2.5	2.5
	550		3.1				3.1			2.7	2.7
	600		3.4				3.4	2.0		3.0	2.9
	650		3.8				3.8	2.2		3.2	3.1
	700		4.1				4.1	2.4		3.5	3.4
	800		4.8				4.8	2.8		4.2	3.8
	900		5.5				5.5	3.3		4.8	4.2
	1000		6.2				6.2	3.7		5.3	4.7
	1100		6.9				6.9	4.1			5.1
	1200		7.6	2.9			7.6	4.5			5.5
	1300		8.3	3.3			8.3	5.0			
	1400		9.0	3.7			9.0	5.4			
	1500		9.7	4.1			9.7	5.8			
	1600		10.4	4.6			10.4	6.3			
	1700		11.1	5.0			11.1	6.8			
	1800		11.8	5.5			11.8	7.3			
	1900			6.0				7.8			
	2000			6.5				8.3			
	2100			7.0				8.8			
	2200			7.5				9.3			
	2300			8.0				9.8			
	2400			8.6							
	2500			9.6							
	2600			10.6							
	2700			11.7							
	2800			12.8							
	2900			13.5							
	3000			14.2							
	3100			14.9							
	3200			15.6							
	3300			16.3							
"k" for kraftbands		0.12	0.25	0.69	0.12	0.16	0.25	0.55	0.16	0.27	0.45
"k" for single belts		0.07	0.19	0.57	0.07	0.12	0.19	0.37	0.11	0.20	0.33

Intermediate values may be determined by linear interpolation.
The figures apply only for drives with grooved pulleys.
Values for V-flat drives can be provided upon request.

Design Hints

Calculating the Axial Force/Shaft Loading under Dynamic Conditions



Power Transmission

With drives having electric motors as the prime movers, care should be taken to ensure that the dynamic loading can be safely accommodated by the motor shafts and bearings to which it is applied.

Experience has shown that drives on

- electric motors,
- internal combustion engines,
- turbines,
- and very heavy-duty drives such as stone crushers, calenders, and heavily loaded mills,

call for the dynamic bearing load to be determined, that is the shaft and bearing loads on both the driver and the driven shafts.

Exact calculation of the "dynamic axial force" saves unnecessary expense of:

- premature bearing failure,
- shaft failure or
- over designed bearings and shafts.

In the case of two pulley drives, the driver and driven shafts and the bearings are subjected to the same dynamic axial force, but in opposite directions. When idlers are employed, the magnitude and the direction of the axial force are almost always different on each pulley. If the magnitude and direction of the dynamic axial force is to be determined, a graphical solution, using a vector diagram for the dynamic forces in the tight side S_1 and the slack side S_2 , is always recommended.

If only the magnitude of the dynamic axial force is to be determined, this can be achieved using the formula for " $S_{a \text{ dyn}}$ ".

Data from the calculation examples given on pages 79 to 81.

$$P_B = 171.6 \text{ kW} \quad c_1 = 1.00$$

$$v = 21.76 \text{ m/s} \quad \beta = 170^\circ$$

Dynamic tight side tension

$$S_1 \approx \frac{1020 \cdot P_B}{c_1 \cdot v}$$


$$S_1 \approx \frac{1020 \cdot 171.6}{1.0 \cdot 21.76} \approx \mathbf{8044 \text{ N}}$$

Dynamic slack side tension

$$S_2 \approx \frac{1000 \cdot (1.02 - c_1) \cdot P_B}{c_1 \cdot v}$$

$$S_2 \approx \frac{1000 \cdot (1.02 - 1.0) \cdot 171.6}{1.0 \cdot 21.76} \approx \mathbf{158 \text{ N}}$$

A) Graphical solution

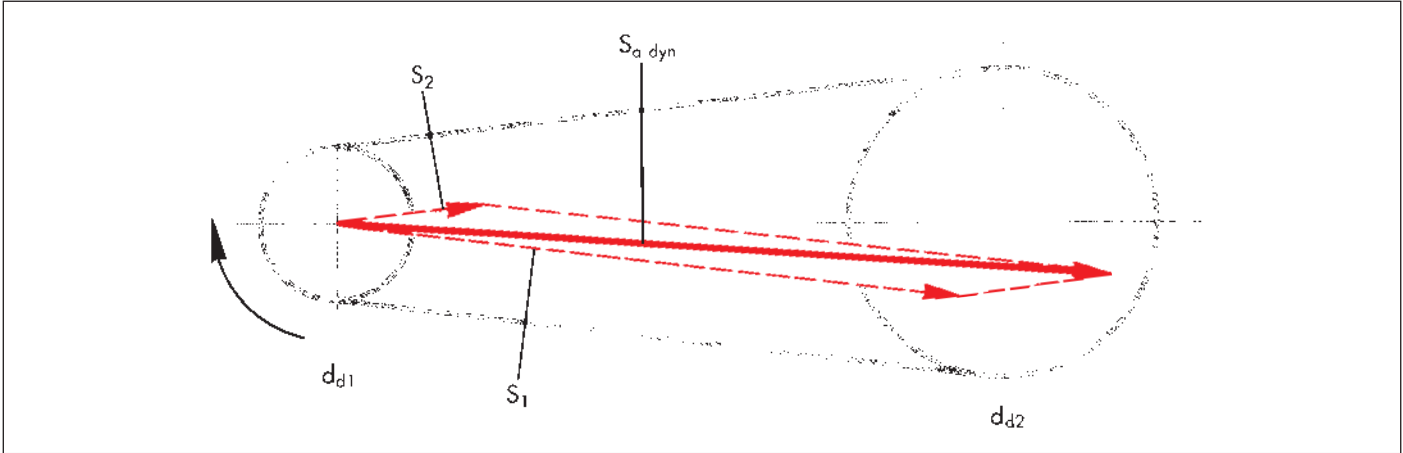

B) Solution using the formula for $S_{a \text{ dyn}}$

Dynamic axial force

$$S_{a \text{ dyn}} \approx \sqrt{S_1^2 + S_2^2 - 2 \cdot S_1 \cdot S_2 \cdot \cos \beta}$$

$$S_{a \text{ dyn}} \approx \sqrt{8044^2 + 158^2 - 2 \cdot 8044 \cdot 158 \cdot 0.9848} \approx \mathbf{8200 \text{ N}}$$

Design Hints

Belt Tensioning for **optibelt** V-Belts



optibelt TT 3 Tension Tester

This **optibelt TT 3 Tension Tester** is used for tension checking of drive belts by means of frequency measurement. Measurements are in Hertz (Hz). When belt parameters are entered, tension is indicated in Newton (N).

Advantages of the tester:

- Non-contact, repeatable measurements
- Easy to handle
- Wide measurement spectrum from 10-600 Hz
- High accuracy of measurement
- Quality evaluation of the measurement result
- Storage in a data base
- Easy to use
- Universal measuring head for comfortable measuring
- Data communication via PC



Power Transmission

optibelt TT mini Tension Tester

The **optibelt TT mini** is used for tension checking of drive belts by means of frequency measurement in Hertz (Hz).

Advantages of the **optibelt TT mini**:


- Readings in Hertz [Hz]
- Wide measurement spectrum from 10-600 Hz
- Non-contact repeatable measurement
- Very compact and easy to handle
- Automatic shut down
- Works calibrated and CE approved

Span Tension Calculation

Formula: $T = 4 \cdot k \cdot L^2 \cdot f^2$

$T \hat{=}$ Span tension [N]
 $k \hat{=}$ Belt weight [kg/m]
 $L \hat{=}$ Span length [m]
 $f \hat{=}$ Frequency [Hz]

Optikrik Tension Gauges

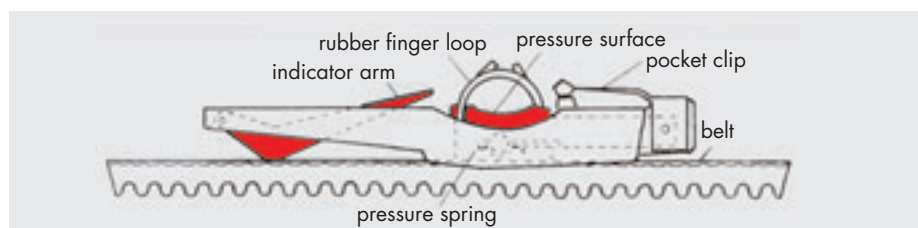

This gauge offers a simplified method of belt tensioning.

This simplified tensioning method should be used for example when technical data is not known and the optimum tension therefore cannot be calculated. This method requires only knowledge of the diameter of the small pulley and the belt section and construction.

The Optikrik tension gauge is used to directly read the belt tension. By reducing or increasing the belt tension the desired value can be obtained.

For different tensioning values, Optikrik 0, I, II, III with corresponding measurement ranges are available.

Instructions for use

1. The gauge is placed in the middle between the two pulleys on the back of the belt, in the case of sets of belts ideally on the central belt. Before doing this, ensure that the indicator is pushed down into the gauge body. (First press the indicator arm onto the scale.)
2. Lay the gauge loosely on the belt to be measured and press a finger slowly on to the pressure surface.
3. Try not to touch the gauge with more than one finger during the measuring process.
4. Once you hear or feel a definite click, immediately release pressure and the indicator arm will remain in the measured position.
5. Carefully lift the gauge without moving the indicator arm. Read off the belt tension (see diagram). Read off the measurement at the exact point where the top surface of the indicator arm crosses the scale.
6. Reduce or increase the belt tension according to the measurement result until it is within the desired tension level.



Design Hints

Belt Tensioning for **optibelt** V-Belts



Section	Diameter of small pulley (mm)	Static belt tension T_{max} (N)					
		<i>RED POWER II</i>		Standard (wrapped)		<i>Super X-POWER M=S</i> <i>SUPER TX M=S</i>	
		Initial fitting new V-belts	Re-fitting existing V-belts	Initial fitting	Retension	Initial fitting	Retension
SPZ; 3V/9N; XPZ; 3VX/9NX	≤ 71	250	200	200	150	250	200
	> 71 ≤ 90	300	250	250	200	300	250
	> 90 ≤ 125	400	300	350	250	400	300
	> 125 *						
SPA; XPA	≤ 100	400	300	350	250	400	300
	> 100 ≤ 140	500	400	400	300	500	400
	> 140 ≤ 200	600	450	500	400	600	450
	> 200 *						
SPB; 5V/15N; XPB; 5VX/15NX	≤ 160	700	550	650	500	700	550
	> 160 ≤ 224	850	650	700	550	850	650
	> 224 ≤ 355	1000	800	900	700	1000	800
	> 355 *						
SPC; XPC	≤ 250	1400	1100	1000	800	1400	1100
	> 250 ≤ 355	1600	1200	1400	1100	1600	1200
	> 355 ≤ 560	1900	1500	1800	1400	1900	1500
	> 560 *						
Z/10; ZX/X10	≤ 50	–	–	90	70	120	90
	> 50 ≤ 71			120	90	140	110
	> 71 ≤ 100			140	110	160	130
	> 100 *						
A/13; AX/X13	≤ 80	–	–	150	110	200	150
	> 80 ≤ 100			200	150	250	200
	> 100 ≤ 132			300	250	400	300
	> 132 *						
B/17; BX/X17	≤ 125	–	–	300	250	450	350
	> 125 ≤ 160			400	300	500	400
	> 160 ≤ 200			500	400	600	450
	> 200 *						
C/22; CX/X22	≤ 200	–	–	700	500	800	600
	> 200 ≤ 250			800	600	900	700
	> 250 ≤ 355			900	700	1000	800
	> 355 *						

* Tension values for these pulleys must be calculated.

Tension Gauges:

Optikrik 0	range:	70– 150 N
Optikrik I	range:	150– 600 N
Optikrik II	range:	500–1400 N
Optikrik III	range:	1300–3100 N

The static tension values shown are calculated for maximum power transmission capability (per V-belt) and should be applied only when accurate data is not available.

Calculation Basis


Wedge belts	speed v = 5 to 42 m/s
Classical V-belts	speed v = 5 to 30 m/s

Design Hints

Installation and Maintenance Aids



Power Transmission

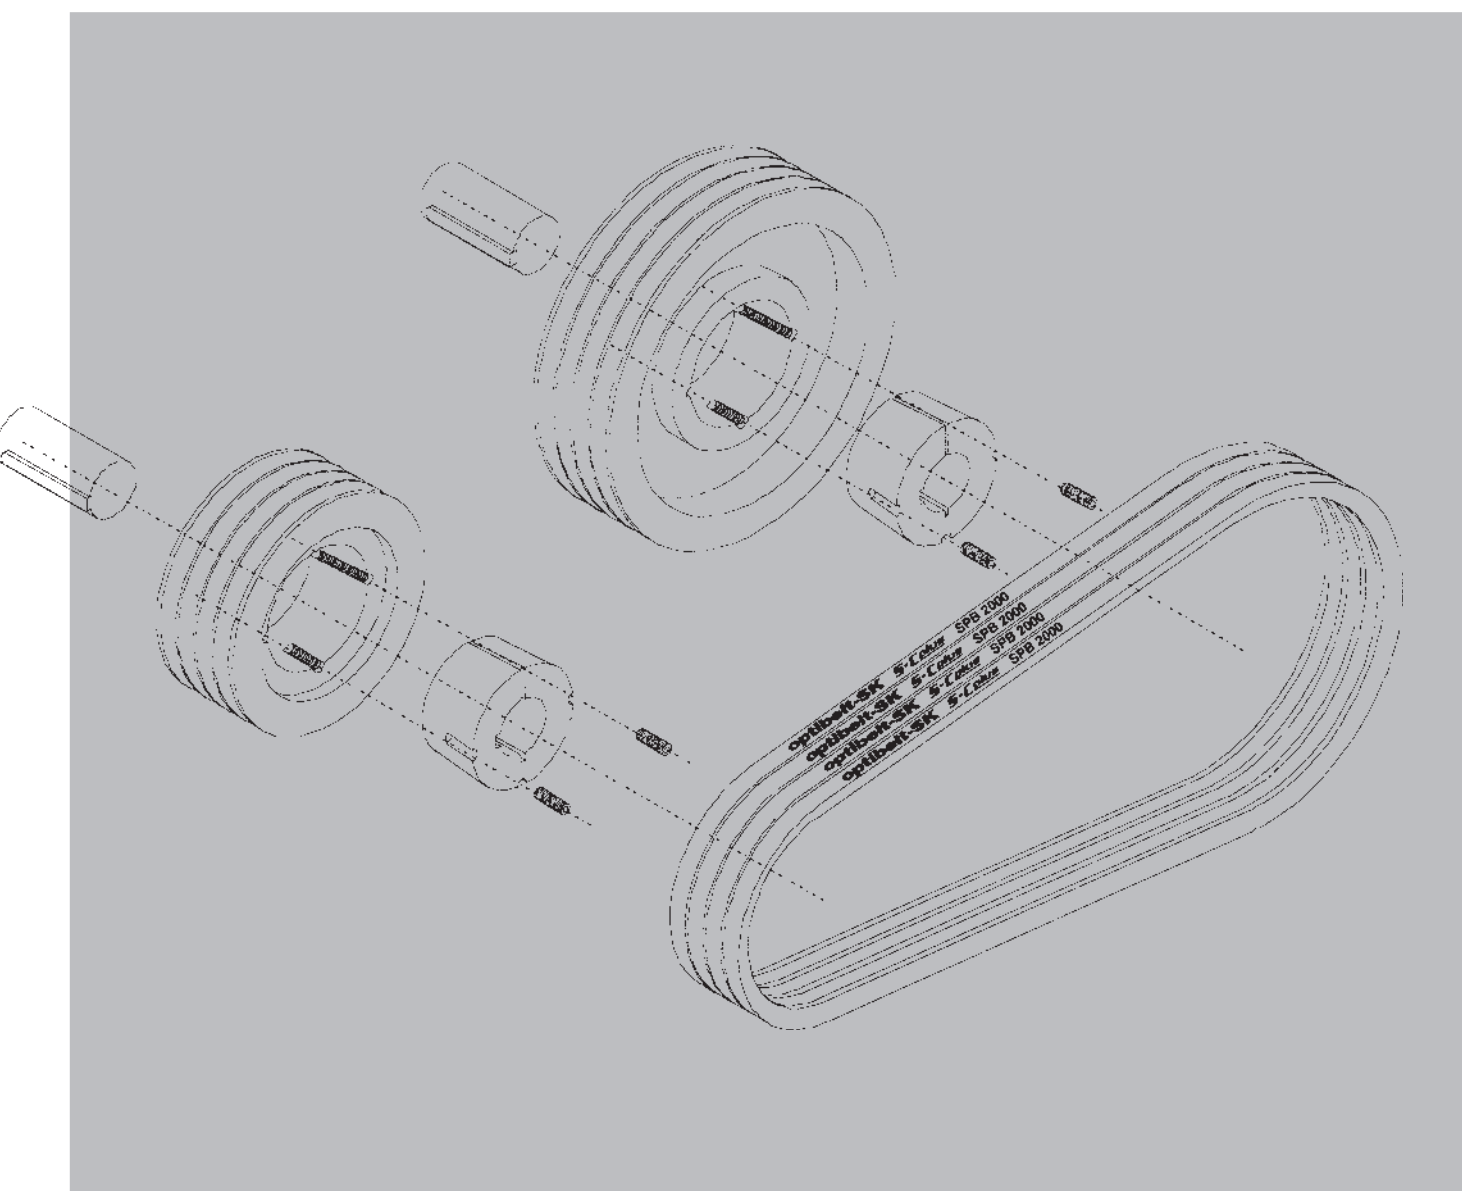


Design Hints

Installation and Maintenance Aids



Safety: Before starting any maintenance work, it is extremely important that any machine components are in a safe position which cannot be changed during maintenance work. In addition, safety recommendations of the manufacturer are to be strictly observed.

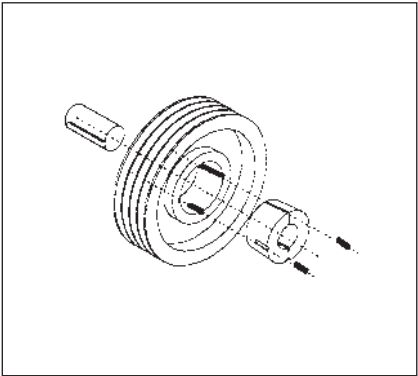

optibelt K5 V-Grooved Pulley with Taper Bush


The V-grooved pulleys are to be checked for damage and correct dimensions before installation.

Installation (see pictures on page 134)

- 1. All shiny surfaces like bore and tapered surface of the taper bush as well as the tapered bore of the pulley have to be cleaned and degreased. Insert taper bush and hub and align all connecting bores. Half tapped holes have to face half plain bores.
- 2. Stud screws (TB 1008-3030) and/or cap head screws (TB 3525-5050) should be slightly greased and screwed in. Do not yet tighten the screws.
- 3. Clean and degrease the shaft. Push pulley with


taper bush to the desired position on the shaft. See alignment of the V-grooved pulley.

- 4. When using a key, it has to be inserted in the hub of the shaft first. Between the key and the bore hub there needs to be a certain tolerance.
- 5. With a socket wrench according to DIN 911 stud screws and/or cap head screws have to be tightened uniformly using the tightening torque stated in the table.
- 6. After a short operation period (0.5 to 1 hour) check tightening torque of the screws and correct if necessary.
- 7. In order to prevent the ingress of foreign material, fill empty removal bores with grease.

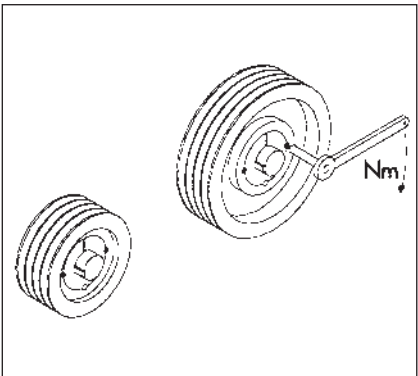

Taper Bushes, Screw Tightening Torque

Dimension	Wrench size	No. of screws	Tightening moment (Nm)
TB 1008, 1108	3	2	5.7
TB 1210, 1215, 1310, 1610, 1615	5	2	20.0
TB 2012	6	2	31.0
TB 2517	6	2	49.0
TB 3020, 3030	8	2	92.0
TB 3525, 3535	10	3	115.0
TB 4040	12	3	172.0
TB 4545	14	3	195.0
TB 5050	14	3	275.0

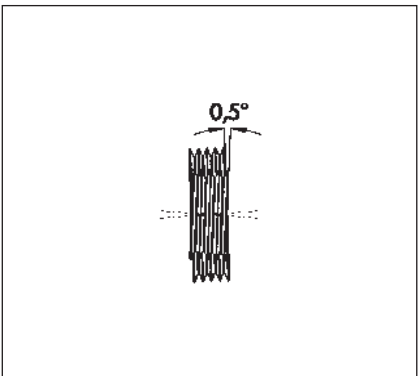


Horizontal Alignment of Shafts

Motor and drive shafts are to be aligned using a spirit level, if necessary.

Note!

Maximum recommended shaft deviation 0.5°

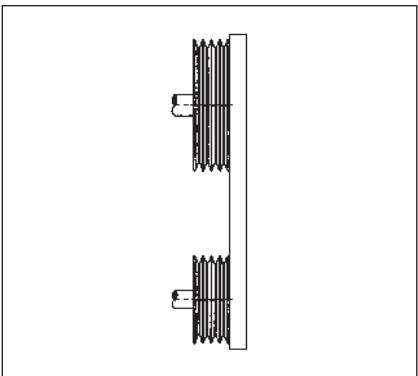

Vertical Alignment of the V-Grooved Pulleys

The alignment of the V-grooved pulleys is checked before and after tightening the taper bushes using a straight edge or laser alignment tool.

Note!

Check whether the face widths of the V-grooved pulleys have the same sizes. A possible deviation of the face width has to be taken into consideration. With a symmetrical face set-up, the distance of the parallel to the smaller face is half the deviation.

Design Hints


Installation and Maintenance Aids



Initial Installation

Always install the V-belts without using force. Installations using screw drivers, crowbars etc. cause internal and external damage to the belt. V-belts installed under force might only run for several days. A proper installation of the belt saves you time and money.

Where there is insufficient adjustment for easy belt fitting the belts should be fitted to the pulleys before the pulleys are fitted to the shafts.

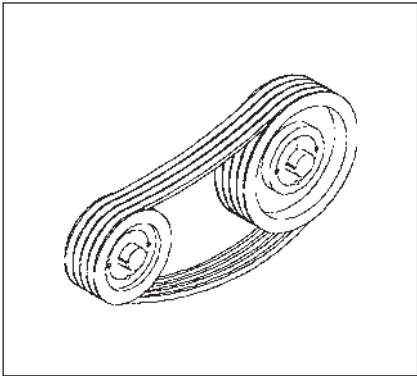


Belt Tensioning

Use belt tensioning values according to Optibelt's recommendations. Set the belt tension with the motor and machine shafts parallel. Operate the belt for some revolutions and check the belt tension again. By experience, belt tension should be checked again after an operation time of about 0.5 to 4 hours and corrected, if necessary.

* For further hints on belt tensioning see page 129.

* **Optikrik**

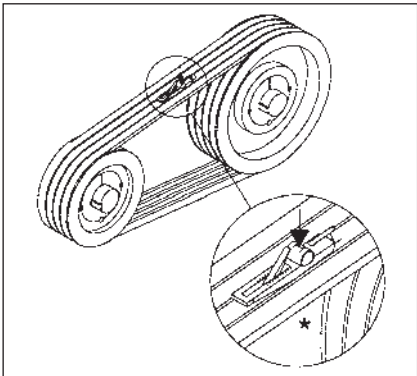

Permissible Shaft Deviation

After applying the initial installation tension the distances X_1 , X_2 between the two pulleys d_{d1} , d_{d2} and the parallel set to axis height should be measured with attached adjust guide bar or Optibelt Laser Pointer. The maximum permissible values for the distance X from the table should not be exceeded, depending on the diameter d_d . Depending on the pulley diameter, the intermediate values for X should be interpolated.

Pulley diameter d_{d1} , d_{d2}	Max. permissible deviation X_1 , X_2
112 mm	0.5 mm
224 mm	1.0 mm
450 mm	2.0 mm
630 mm	3.0 mm
900 mm	4.0 mm
1100 mm	5.0 mm
1400 mm	6.0 mm
1600 mm	7.0 mm




Drive Checking

We recommend checking the drive regularly, e.g. after each 3 to 6 months. V-grooved pulleys are to be checked for wear and consistency. Use the Optibelt section and pulley groove templates as aids.

When changing V-grooved pulleys with taper bushes (see figures on page 132) the following procedures should be observed.

1. Loosen all screws. Screw out one or two screws depending on the bush size, grease them and screw them into the extraction bores.
2. Tighten the screw or screws equally until the bush releases from the hub and the pulley can be moved freely on the shaft.
3. Take off the pulley with the bush from the shaft.


**** Section and pulley groove template**

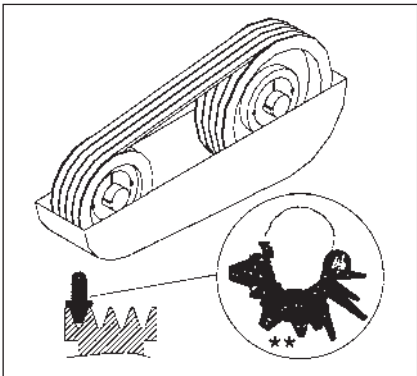

Design Hints

Installation and Maintenance Aids


V-Grooved Pulleys with Taper Bushes

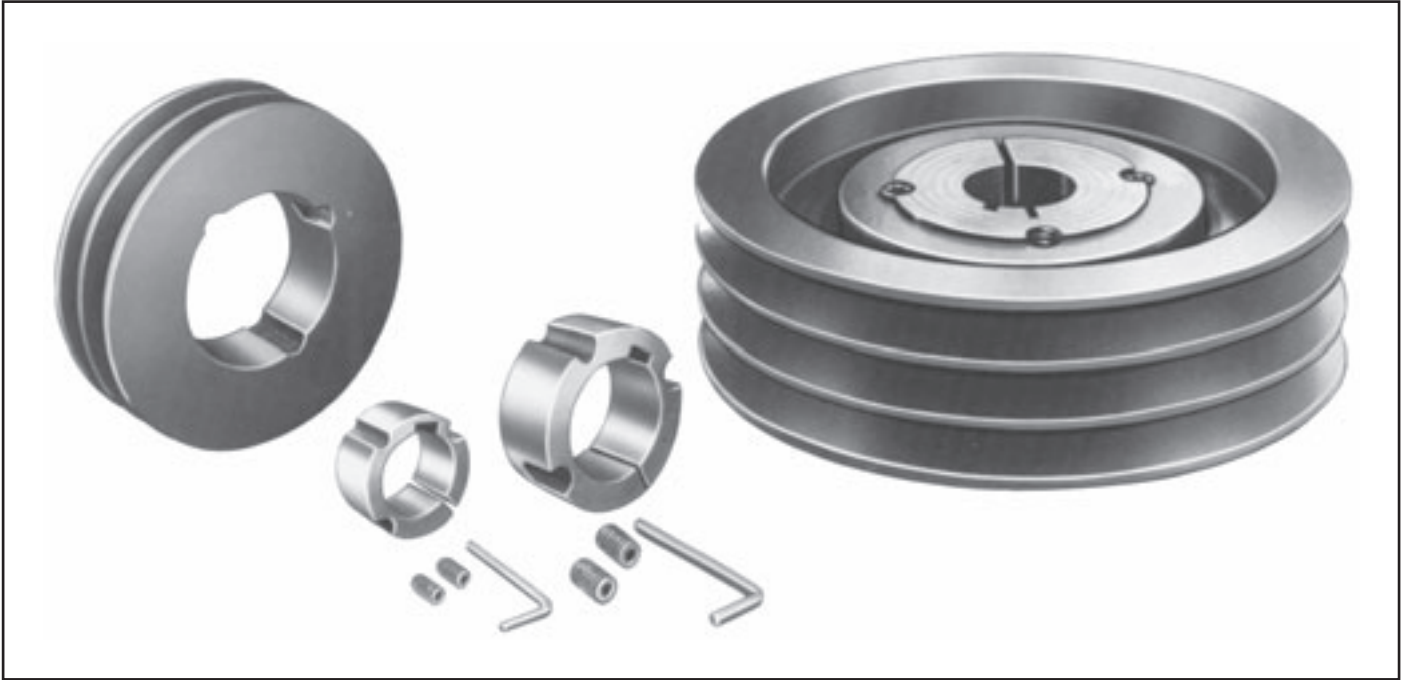

Assembly

Bush
TB 1008-3030


Bush
TB 3525-5050

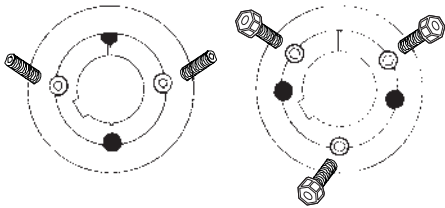

Disassembly

Bush
TB 1008-3030

Bush
TB 3525-5050

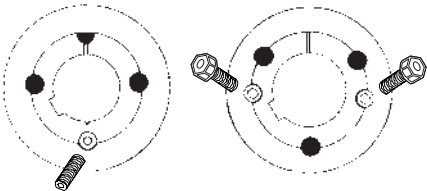

Design Hints

Storage



Power Transmission

● General Note on Storage

Properly stored V-belts retain their properties for many years (see also DIN 7716). However, when stored under poor conditions or handled incorrectly, the physical properties of most rubber products will be impaired. This can be the consequence for example of the effects of oxygen, ozone, extreme temperatures, light, moisture or solvents.

● Storage Area

The storage area should be dry and dust free. V-belts must not be stored close to chemicals, solvents, fuels, lubricants and acids etc.

● Temperature

V-belts should be stored at temperatures between + 15 °C and + 25 °C. Lower temperatures usually have no detrimental effect on the V-belts. Since, however, belts become very stiff at low temperatures, they should be warmed to approximately + 20 °C before fitting to avoid fracture and cracking.

Radiators and supply pipes should be screened. V-belts should be stored at least 1 m away from heat sources.

● Light

V-belts should be protected against light, especially direct sunlight and strong artificial light with a high ultra-violet content (ozone formation) such as naked fluorescent tubes. Illumination using conventional light bulbs is advisable.

● Ozone

In order to counteract the harmful effects of ozone, warehouses should not contain any appliances that generate ozone, for example fluorescent lights, mercury vapour lamps or high voltage electrical equipment. Combustion gases and vapours which could lead to the formation of ozone by photo-chemical processes must be avoided or eliminated.

● Moisture

Damp storage areas are unsuitable. Care must be taken to ensure that condensation does not develop. The most favourable relative air humidity is below 65 %.

● Proper Storage

Because stress can promote both permanent deformation and cracking, care must be taken to ensure that V-belts are stored without stress i.e. without tension, compression or any other form of pressure.

If V-belts have to be stored horizontally and stacked upon each other, it is recommended that the stack height does not exceed 300 mm in order to avoid permanent deformation. If, in order to save space, V-belts are hung, the diameter of the cylinder on which the belts rest should be at least ten times the height of the belt section.

optibelt 5=C plus, optibelt Super X-POWER M=5 and optibelt SUPER TX M=5 belts do not need to be stored in sets as they can be formed into sets without having to be measured.

● Cleaning

Dirty V-belts can be cleaned using a 1:10 mixture of glycerine and methylated spirits. Petrol, benzole, turpentine and the like should not be used.

In addition, sharp objects, wire brushes, emery paper etc. must, under all circumstances, be avoided as these can cause damage to the belt.

Design Hints

Physical Properties



These tables are provided to simplify selection of the correct Optibelt for any drive problem. Detailed information is given elsewhere in this manual or in similar Technical Manuals for products other than V-belts or kraftbands.	Ambient temperature maximum/minimum (°C)		Oil resistance	Anti-static properties (after testing)	S=C plus Set Constant M=S Matched Set	Constructions for mining applications	Smooth running	Stretch	
	Standard construction	Special construction XHR						Standard construction	Special construction
SK high performance wedge belts	- 40 + 70	- 30 + 90	limited	yes	yes	yes	medium/ good	low	very low
RED POWER II high-performance-wedge belts	- 30 + 100		good	yes	yes		good	very low	
Super X-POWER M=S, SUPER TX M=S raw edge, moulded cogged V-belts	- 30 + 90		good	yes	yes		good	very low	
MARATHON 1, MARATHON 2 M=S automotive belts	- 30 + 90		good	yes	M2 yes		good	very low	
VB classical V-belts	- 40 + 70	- 30 + 90	limited	yes	yes	yes	medium/ good	low	very low
KB kraftbands	- 40 + 70	- 35 + 90	limited	yes			good	low	very low
DK double section V-belts	- 35 + 85		good	yes			medium	low	
SUPER VX variable speed belts	- 30 + 90		good	yes			very good	very low	
RB ribbed belts	- 30 + 90	- 30 + 120	good	PJ PK, PL special construction			very good	low	

Design Hints

Physical Properties



Recommended max. belt speed m/s	Efficiency	Behaviour under shock loading	Vibration tendency	Use on variable speed pulleys	Synchronous	Recommended max. speed ratio	Use with outside idlers		Maintenance	Recommended applications There are a number of applications that can be covered by more than one type of belt. In these instances, belt selection must be made on an individual case basis.
							Standard construction	Special construction		
≤ 42	up to 97%	good	low	possible	no	up to 1 : 10	limited	good	low	Compressors, mixers, rotary print machines, extruders, worm compressors, textile looms, axial flow fans, rotary pumps
≤ 55*	up to 97%	good	low	possible	no	up to 1 : 10	good	–	maintenance free	Fans, pumps, mixers, grinders, special machinery, lathes and drills, grinders
depends on section ≤ 55*	up to 97%	good	low	possible	no	up to 1 : 12	limited	good	Super X-POWER: low maintenance	Fans, pumps, mixers, grinders, special machinery, lathes and drills, grinders
≤ 42	up to 97%	good	low	possible	no	up to 1 : 12	limited	good	maintenance free	Automobiles, generators, water pumps, fans
≤ 30	up to 97%	good	low	possible	no	up to 1 : 12	limited	good	low	Pumps, presses, crushers, rotary saws, pillar drills, planing machinery, concrete mixers, compressors, lawn mowers, aerators, bale presses, chaff cutters
depends on section ≤ 42	up to 97%	very good	very low	not possible	no	up to 1 : 15	limited	very good	low	Fans, shredders, road millers, extruders, rotary mowers, stone crushers, saw mills, vibration rollers, conveyors, mixers, combine harvesters, pulpers
≤ 30	up to 95%	good	low	not possible	no	up to 1 : 5	very good	good	low	Special reversible drives, textile looms, sweepers, harvesters
depends on section ≤ 42	up to 95%	good	low	good	no	up to 1 : 12 for 2 variable speed pulleys	limited		low	Special drives, compact units, snowmobile drives, multi-colour offset, adjustable pulley sets, thresher drum drives, spooling machines, lathes
depends on section ≤ 60	up to 96%	good	very low	not possible	no	up to 1 : 35	good		low	Offset machines, washing machines, milling machines, drills, auxiliary drives, main shaft drives

* Where V > 42 m/s please consult our Applications Engineering Department

Design Hints

Physical Properties



These tables are provided to simplify selection of the correct Optibelt for any drive problem. Detailed information is given elsewhere in this manual or in similar Technical Manuals for products other than V-belts or kraftbands.	Ambient temperature maximum/minimum (°C)		Oil resistance	Anti-static properties (after testing)	Smooth running	Stretch
	Standard construction	Special construction XHR	Standard construction			
OMEGA, OMEGA HP + OMEGA HL timing belts	- 30 + 100	- 30 + 140	limited	yes	very good	none
ZR timing belts	- 30 + 100	- 30 + 140	limited	yes	very good	none
ALPHA timing belts made from polyurethane	- 30 + 80		good	no	good	none
RR plastic round section belting	- 10 + 80		good	no	medium	high
KK plastic V-belting	- 10 + 80		good	no	medium	high
Optimat DE open-ended V-belting, punched DIN 2216	- 20 + 70		limited	no	medium	high
PKR V-belts with patterned top surface	- 30 + 70		limited	yes	medium	low
Optimax HF high performance flat belts	- 20 + 110		limited	no	very good	low

Design Hints

Physical Properties



Recommended max. belt speed m/s	Efficiency	Behaviour under shock loading	Vibration tendency	Use on variable speed pulleys	Synchronous	Recommended max. speed ratio	Use with outside idlers		Maintenance	Recommended applications There are a number of applications that can be covered by more than one type of belt. In these instances, belt selection must be made on an individual case basis.
							Standard construction	Special construction		
depends on section ≤ 80	up to 98 %	sensitive	depends on speed	not possible	yes	up to 1 : 10	good	good	maintenance free	Textile machines, spinning machines, textile looms, printing machines, paper machines, wood working machines, machine tools, linear units, conveyors, skid unit, packing machines, door and gate openers, lifting devices, mixers, extruders, compressors
depends on section ≤ 80	up to 98 %	sensitive	depends on speed	not possible	yes	up to 1 : 10	good	good	maintenance free	Copiers, food processors, swivel arm robots, gripper drives, belt grinders, cam shaft drives, brush drives, clocks, X-ray equipment, envelope stuffers, cameras, plotters, coin operated machinery, main and feed drives, conveyor drives, material feed, printers
depends on section ≤ 80	up to 98 %	sensitive	depends on speed	not possible	yes	up to 1 : 10	good	good	maintenance free	Cameras, plotters, printers, coin operated machinery, main and feed drives, conveyor drives, sample conveyors, material feed, flight models
≤ 20	up to 95 %	good	low	not possible	no	up to 1 : 10	good	good	frequent retensioning	Special machinery
≤ 20	up to 95 %	good	low	not possible	no	up to 1 : 10	good	good	frequent retensioning	Packaging machinery, conveyor systems, ram conveyors, varnishing equipment
≤ 20	up to 90 %	good	medium	limited possible	no	up to 1 : 10	limit- ed		frequent retensioning	Where installation conditions are difficult
depends on section ≤ 20	up to 95 %	good	low	limited possible	no	up to 1 : 10	limit- ed	good	low	Conveyor systems in the timber industry, in cement works, in agriculture, in the ceramics industry, in the glass industry, at airports, in sea and river ports
≤ 70	up to 95 %	good	very low	not possible	no	up to 1 : 12	very good		low	Water turbines, emergency power generators, saw mills, shredders, worm compressors, roller drives, transmission drives, conical drives, cross cutters, floor cleaning equipment, multiple positioning drives, crushers, sealing belts, hammer mills

Design Hints

Problems – Causes – Remedies



Problems	Causes	Remedies
Belt failure shortly after fitting (belt snaps)	Forceful installation, causing damage to the tension cord Ingress of foreign matter during operation Drive undersized, not enough belts Drive jammed	Follow installation instructions for easy belt fitting Fit protective guard Check drive design and determine new dimensions Remove cause
Breaks and cracks in the base of the belt (brittleness)	Outside idler pulley in use that does not comply with the positioning and sizes recommended by us Pulley diameter too small Excessive heat Excessive cold Excessive belt slip Contamination by chemicals	Observe Optibelt recommendations, e.g. increase the diameter; replace with an inside idler on the slack side of the drive; use Optibelt RED POWER II or an Optibelt special construction Re-design using recommended minimum pulley diameters; use an Optibelt special construction, or Optibelt Super X-POWER, Optibelt SUPER TX M=S Remove or baffle heat source; improve ventilation; use Optibelt Super X-POWER, Optibelt SUPER TX M=S or V-belt with Aramid cord construction Warm the belt before operation; use Optibelt special construction XCR (extra cold resistant) Retension drive according to installation instructions; check drive design and re-design if necessary Protect drive from contamination source; use Optibelt special construction
Severe belt vibration	Drive undersized Centre distance significantly longer than recommended High shock load Belt tension too low Unbalanced V-pulleys	Check drive design and modify if necessary Shorten centre distance; use an inside idler in the drive slack side; re-design using Optibelt KB Kraftbands Use Optibelt KB Kraftbands; use an inside idler in the drive slack side; use an Optibelt special construction Correct tension Balance pulleys
Belts cannot be retensioned	Insufficient allowance for centre distance in drive design Excessive stretch caused by inadequate performance Incorrect belt length	Modify drive to allow for the Optibelt recommended take-up Carry out drive calculation and re-design Use shorter belts

Should other problems occur, please contact our engineers from the Applications Engineering Department. They will require comprehensive technical details in order to provide you with concrete solutions.

Design Hints

Problems – Causes – Remedies



Problems	Causes	Remedies
Belts turn over in pulley grooves	Poor drive alignment Incorrect belt/pulley groove section Excessive wear in pulley grooves Excessive vibration Belt tension too low Foreign matter in the pulley grooves	Realign pulleys Match belt and pulley groove section Renew pulleys Use an inside idler on drive slack side; use Optibelt KB Kraftbands Re-tension drive Remove foreign matter and install drive guard
Excessive wear on belt edges	Starting torque too high Incorrect pulley groove angle Excessive pulley groove wear Incorrect belt/pulley groove section Poor pulley alignment Pulley diameter below recommended minimum Belt tension too low Belt rubbing against or catching on protruding parts	Check drive design and re-design Re-machine or replace pulleys Replace pulleys Match belt and pulley groove section Realign pulleys Increase pulley diameter (re-design drive); use Optibelt special construction, Optibelt Super X-POWER M=S or Optibelt SUPER TX M=S Check tension and retension Remove protruding parts; re-position drive
Excessive running noise	Poor pulley alignment Belt tension too low Drive overloaded	Realign pulleys Check tension and retension Check drive design and re-design if necessary
Belt swelling or softening and sticky	Contamination by oil, grease, chemicals	Protect drive from contamination source; use Optibelt Super X-POWER M=S or Optibelt SUPER TX M=S or Optibelt Construction "05" clean pulley grooves with petrol or alcohol before fitting new belts
Uneven belt stretch	Worn or badly machined pulley grooves Used belts mixed with new belts on the drive Belts from different manufacturers used on same drive	Replace pulleys Replace with a completely new set of belts Belt sets must comprise belts from one manufacturer only – Optibelt S=C plus, Optibelt SUPER TX M=S, Optibelt RED POWER II, Optibelt Super X-POWER M=S

Should other problems occur, please contact our engineers from the Applications Engineering Department. They will require comprehensive technical details in order to provide you with concrete solutions.

Design Hints

Length Measurement Conversion and Conditions Factors



Power Transmission

Measuring the Belt Length

The belt is placed over two identically sized measuring pulleys with the design of groove shown in the following drawings. The dimensions are given in the tables 64 to 70, on pages 143/144.

Pressure is applied to the adjustable pulley so that the force Q is applied to the belt. Before measuring the drive centre distance a , the belt should be fully rotated three times under load. This ensures that the belt is well seated in the pulley, an essential pre-condition for the accuracy of the resulting measurement.


The length is obtained by adding the diameter of the pulley to twice the drive centre distance a .

$$L_d = 2 a + U_d$$


$$L_a = 2 a + U_a$$

You will find the length conversion factors in the tables on pages 143/144 and 147/148.


Arrangement for measuring belt length

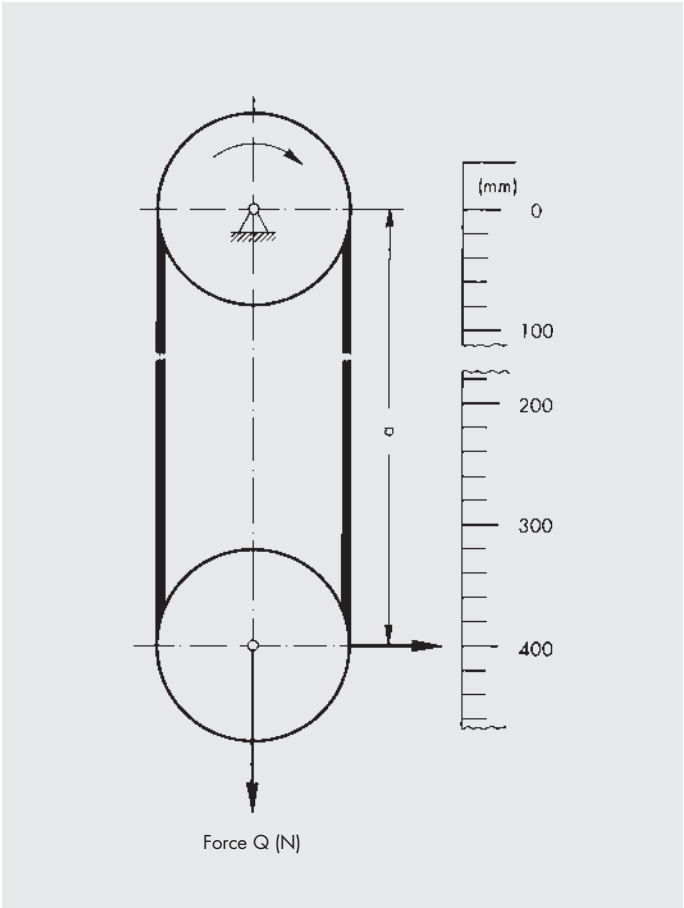


Measuring pulley for wedge belts to BS 3790, DIN 7753 Part 1 and classical V-belts to BS 3790 and DIN 2215

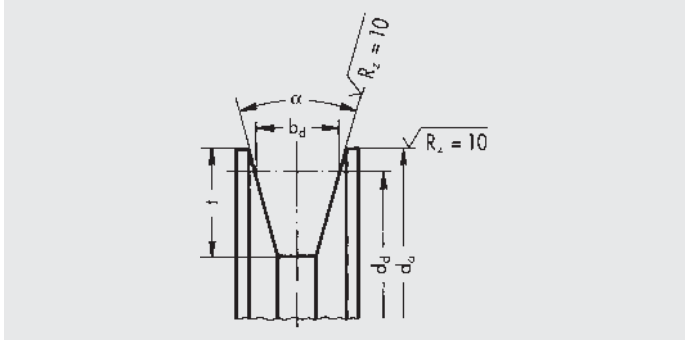


Measuring pulley for wedge belts
USA Standard RMA/MPTA

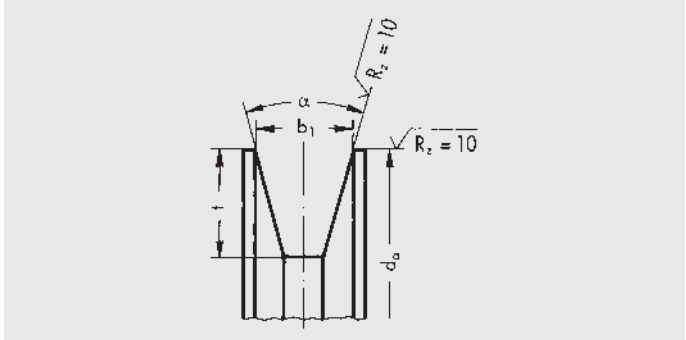

Measuring pulley for kraftbands

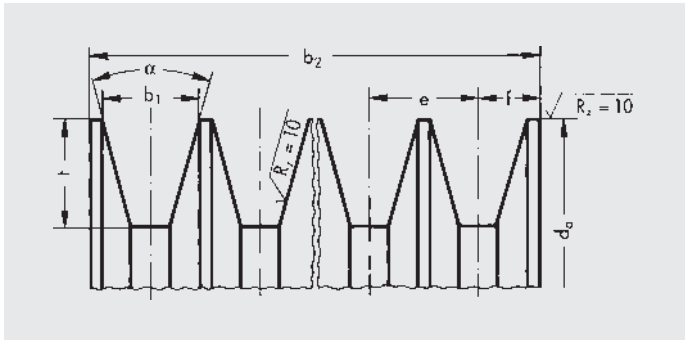

Measuring pulley for double section V-belts

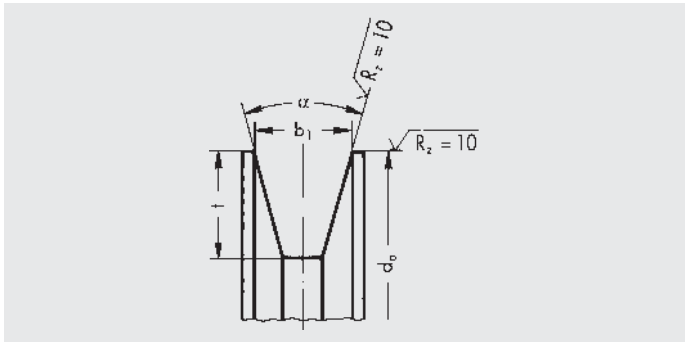

Design Hints

Length Measurement Conversion and Conditions Factors



Table 64: Optibelt SK wedge belts
Optibelt Super X-POWER M=S wedge belts, raw edge, moulded cogged
Measuring pulleys and force to BS 3790, DIN 7753 Part 1 and ISO 4183

Section	Datum circum- ference U_d $= d_d \cdot \pi$	Datum diameter d_d ± 0.05	Outside diameter d_a ± 0.05	Datum width b_d	Groove angle α° $\pm 10'$	Groove depth t_{min}	Force Q (N)	Outside length L_a (mm)	Inside length L_i (mm)
SPZ; XPZ	300	95.49	100	8.50	36	11	360	$L_a \approx L_i + 13$ $L_a \approx L_i + 51$	$L_i \approx L_d - 38$ $L_i \approx L_a - 51$
SPA; XPA	450	143.24	149	11.00	36	14	560	$L_a \approx L_i + 18$ $L_a \approx L_i + 63$	$L_i \approx L_d - 45$ $L_i \approx L_a - 63$
SPB; XPB	600	190.99	198	14.00	36	18	900	$L_a \approx L_i + 22$ $L_a \approx L_i + 82$	$L_i \approx L_d - 60$ $L_i \approx L_a - 82$
SPC; XPC	1000	318.31	328	19.00	36	24	1500	$L_a \approx L_i + 30$ $L_a \approx L_i + 113$	$L_i \approx L_d - 83$ $L_i \approx L_a - 113$

Table 65: Optibelt SK wedge belts
Optibelt Super X-POWER M=S wedge belts, raw edge, moulded cogged
Measuring pulleys and force to USA Standard RMA/MTPA

Section	Outside circum- ference U_a $= d_a \cdot \pi$	Outside diameter d_a ± 0.13	Upper groove width b_1 ± 0.13	Groove angle α° $\pm 15'$	Groove depth t_{min}	Force Q (N)	Inside length L_i (mm)
3V/9N; 3VX/9NX	300	95.50	8.90	38	9.00	445	$L_i \approx L_a - 42$
5V/15N; 5VX/15NX	600	191.00	15.24	38	15.00	1000	$L_i \approx L_a - 71$
8V/25N	1000	318.30	25.40	38	25.50	2225	$L_i \approx L_a - 120$

Table 66: Optibelt VB classical V-belts
Optibelt SUPER TX M=S classical V-belts, raw edge, moulded cogged
Measuring pulleys and force to BS 3790, DIN 2215 and ISO 4183

Section	Datum circum- ference U_d $= d_d \cdot \pi$	Datum diameter d_d $\pm 0,05$	Outside diameter d_a $\pm 0,05$	Datum width b_d	Groove angle α° $\pm 10'$	Groove depth t_{min}	Force Q (N)	Outside length L_a (mm)	Inside length L_d (mm)
5	70	22.28	24.88	4.20	32	5	30	$L_d \approx L_i + 19$ $L_d \approx L_i + 8$	$L_d \approx L_i + 11$ $L_d \approx L_a - 8$
Y/6	90	28.65	31.85	5.30	32	6	40	$L_d \approx L_i + 25$ $L_d \approx L_i + 10$	$L_d \approx L_i + 15$ $L_d \approx L_a - 10$
8	140	44.56	48.56	6.70	32	8	80	$L_d \approx L_i + 31$ $L_d \approx L_i + 12$	$L_d \approx L_i + 19$ $L_d \approx L_a - 12$
Z/10; ZX/X10	180	57.30	62.30	8.50	34	10	110	$L_d \approx L_i + 38$ $L_d \approx L_i + 16$	$L_d \approx L_i + 22$ $L_d \approx L_a - 16$
A/13; AX/X13	300	95.50	102.10	11.00	34	12	200	$L_d \approx L_i + 50$ $L_d \approx L_i + 20$	$L_d \approx L_i + 30$ $L_d \approx L_a - 20$
B/17; BX/X17	400	127.32	135.72	14.00	34	15	300	$L_d \approx L_i + 69$ $L_d \approx L_i + 29$	$L_d \approx L_i + 40$ $L_d \approx L_a - 29$
20	520	165.52	175.12	17.00	34	18	750	$L_d \approx L_i + 79$ $L_d \approx L_i + 31$	$L_d \approx L_i + 48$ $L_d \approx L_a - 31$
C/22; CX/X22	700	222.82	234.22	19.00	34	20	750	$L_d \approx L_i + 88$ $L_d \approx L_i + 30$	$L_d \approx L_i + 58$ $L_d \approx L_a - 30$
25	800	254.65	267.25	21.00	34	22	750	$L_d \approx L_i + 100$ $L_d \approx L_i + 39$	$L_d \approx L_i + 61$ $L_d \approx L_a - 39$
D/32	1000	318.31	334.52	27.00	36	28	1400	$L_d \approx L_i + 126$ $L_d \approx L_i + 51$	$L_d \approx L_i + 75$ $L_d \approx L_a - 51$
E/40	1800	572.96	596.96	32.00	36	36	1800	$L_d \approx L_i + 157$ $L_d \approx L_i + 77$	$L_d \approx L_i + 80$ $L_d \approx L_a - 77$

Design Hints

Length Measurement Conversion and Conditions Factors



Table 67: Optibelt KB Kraftbands with high performance wedge belts
Measuring pulleys and force

Section	Outside circumference $U_a = d_a \cdot \pi$	Outside diameter $d_a \pm 0.13$	Upper groove width $b_1 \pm 0.13$	Groove angle $\alpha^\circ \pm 15'$	Groove depth t_{min}	Mean distance e	Tolerance $e^{1)}$	Σ Tol. $e^{2)}$	Force per rib Q (N)	Inside length L_i (mm)
3V/9J	300	95.50	8.90	38	9.00	10.30	± 0.25	± 0.5	445	$L_i \approx L_a - 42$
5V/15J	600	191.00	15.20	38	15.00	17.50	± 0.25	± 0.5	1000	$L_i \approx L_a - 71$
8V/25J	1000	318.30	25.40	38	25.50	28.60	± 0.40	± 0.8	2225	$L_i \approx L_a - 120$

Table 68: Optibelt KB Kraftbands
Measuring pulleys and force

Section	Datum circumference $U_d = d_d \cdot \pi$	Datum diameter $d_d \pm 0.13$	Outside diameter $d_a \pm 0.13$	Datum width b_d	Groove angle $\alpha^\circ \pm 15'$	Groove depth t_{min}	Mean distance e	Tolerance $e^{1)}$	Σ Tol. $e^{2)}$	Force per rib Q (N)	Datum length L_d (mm)
SPZ	300	95.49	100.00	8.50	36	11.00	12.00	± 0.30	± 0.5	360	$L_d \approx L_a - 13$
SPA	450	143.24	149.00	11.00	36	14.00	15.00	± 0.30	± 0.5	560	$L_d \approx L_a - 18$
SPB	600	190.99	198.00	14.00	36	18.00	19.00	± 0.40	± 0.8	900	$L_d \approx L_a - 22$
SPC	1000	318.31	328.00	19.00	36	24.00	25.50	± 0.40	± 0.8	1500	$L_d \approx L_a - 30$

Table 69: Optibelt KB Kraftbands with classical V-belts
Measuring pulleys and force

Section	Outside circumference $U_a = d_a \cdot \pi$	Outside diameter $d_a \pm 0.13$	Upper groove width $b_1 \pm 0.13$	Groove angle $\alpha^\circ \pm 15'$	Groove depth t_{min}	Mean distance e	Tolerance $e^{1)}$	Σ Tol. $e^{2)}$	Force per rib Q (N)	Inside length L_i (mm)
A/HA	254	80.85	12.45	32	12.50	15.88	± 0.38	± 0.8	300	$L_i \approx L_a - 36$
B/HB	381	121.28	16.00	32	14.50	19.05	± 0.38	± 0.8	450	$L_i \approx L_a - 62$
C/HC	635	202.13	22.33	34	20.00	25.40	± 0.38	± 0.8	850	$L_i \approx L_a - 75$
D/HD	889	282.96	31.98	34	28.00	36.53	± 0.38	± 0.8	1000	$L_i \approx L_a - 111$

- 1) Tolerance for the mean distance e between two adjacent grooves
- 2) The sum of all deviations from the nominal dimension e for all groove spacing on one pulley must not exceed the stated figure.

Table 70: Optibelt DK double section V-belts
Measuring pulleys and force according to DIN 5289

Section	Outside circumference $U_a = d_a \cdot \pi$	Outside diameter d_a	Upper groove width b_1	Groove angle $\alpha^\circ \pm 20'$	Groove depth t_{min}	Force Q (N)
AA/HAA	300	95.49	12.60	34	8	300
BB/HBB	400	127.32	16.20	34	10	450
CC/HCC	600	190.99	22.30	34	14	850
DD/HDD	900	286.48	32.00	34	20	1400
22 x 22	600	190.99	22.30	34	14	750
25 x 22	942	300.00	25.00	34	22	1200

Design Hints

Length Tolerances



Table 71: Wedge belts DIN 7753 Part 1

Section	Pitch length (mm)	Length tolerance (mm) Permissible deviation from pitch length		Set tolerance (mm) Permissible difference between the pitch lengths L_d of the belts in one and the same set on multiple belt drives			
		Optibelt wrapped	DIN 7753	Optibelt wrapped	raw edge	DIN 7753/ISO 4184 wrapped	raw edge
SPZ/XPZ SPA/XPA SPB/XPB SPC/XPC	> 630 ≤ 900	DIN	± 6 to ± 9	2	2	2	2
	> 900 ≤ 1 250	DIN	± 9 to ± 12	2	4	2	4
	> 1 250 ≤ 2 000	± 2	± 12 to ± 20	± 2	6	2	6
	> 2 000 ≤ 3 150	± 2	± 20 to ± 32	± 2	6	4	6
	> 3 150 ≤ 5 000*	± 2	± 32 to ± 50	± 2	10*	6	10*
	> 5 000 ≤ 8 000	± 4	± 50 to ± 80	± 4		10	
	> 8 000 ≤ 10 000	± 6	± 80 to ± 100	± 6		16	
	> 10 000 ≤ 12 500	± 8	± 100 to ± 125	± 8			

Table 72: Classical V-belts DIN 2215

Section	Pitch length (mm)	Length tolerance (mm) Permissible deviation from pitch length		Set tolerance (mm) Permissible difference between the pitch lengths L_d of the belts in one and the same set on multiple belt drives			
		Optibelt wrapped	DIN 2215	Optibelt wrapped	raw edge	DIN 2215/ISO 4184 wrapped	raw edge
5 Y/6 8 Z/10; ZX/X10 A/13; AX/X13 B/17; BX/X17 20 C/22; CX/X22 25 D/32 E/40	≤ 250	DIN	+ 8/− 4	2		2	2
	> 250 ≤ 315	DIN	+ 9/− 4	2		2	2
	> 315 ≤ 400	DIN	+ 10/− 5	2		2	2
	> 400 ≤ 500	DIN	+ 11/− 6	2		2	2
	> 500 ≤ 630	DIN	+ 13/− 6	2	2	2	2
	> 630 ≤ 800	DIN	+ 15/− 7	2	2	2	2
	> 800 ≤ 900	DIN	+ 17/− 8	2	2	2	2
	> 900 ≤ 1 250	DIN	+ 19/− 10	4	4	4	4
	> 1 250 ≤ 1 600	± 2	+ 23/− 11	± 2	4	4	4
	> 1 600 ≤ 2 000	± 2	+ 27/− 13	± 2	4	4	4
	> 2 000 ≤ 2 500	± 2	+ 31/− 16	± 2	6	8	8
	> 2 500 ≤ 3 150	± 2	+ 37/− 18	± 2	8	8	8
	> 3 150 ≤ 4 000*	± 2	+ 44/− 22	± 2	8*	12	12*
	> 4 000 ≤ 5 000	± 2	+ 52/− 26	± 2		12	
	> 5 000 ≤ 6 300	± 4	+ 63/− 32	± 4		20	
	> 6 300 ≤ 8 000	± 4	+ 77/− 38	± 4		20	
	> 8 000 ≤ 10 000	± 6	+ 93/− 46	± 6		32	
	>10 000 ≤ 12 500	± 8	+ 112/− 56	± 8		32	
	>12 500 ≤ 15 000	DIN	+ 140/− 70	DIN		48	
	>15 000 ≤ 20 000	DIN	+ 170/− 85	DIN		48	

* Maximum production length for raw edge V-belts ≤ 3550 mm

Optibelt S=C plus or Optibelt M=S V-belts can be used in sets without measuring or remeasuring.

Design Hints

Length Tolerances



Table 73: Wedge belts USA Standard RMA/MTPA

Section	Length designation	Outside length (mm)	Length tolerance (mm) Permissible deviation from outside lengths Replace complete belt sets		Set tolerance (mm) Permissible deviation between the outside lengths L_a of the belts in one and the same set on multiple belt drives Replace complete belt sets		
			Optibelt wrapped	RMA/MPTA	Optibelt wrapped	raw edge	RMA/MPTA
3V/9N 3VX/9NX 5V/15N 5VX/15NX 8V/25N	265 ≤ 500	673 ≤ 1 270	acc. RMA/MPTA	± 8	4	4	4
	530	1 346	± 2	± 10	± 2	4	4
	560	1 422	± 2	± 10	± 2	6	6
	600 ≤ 800	1 524 ≤ 2 032	± 2	± 10	± 2	6	6
	800 ≤ 1 000	2 032 ≤ 2 540	± 2	± 13	± 2	6	6
	1 000 ≤ 1 060	2 540 ≤ 2 692	± 2	± 15	± 2	6	6
	1 120 ≤ 1 400	2 845 ≤ 3 556	± 2	± 15	± 2	10*	10
	1 500 ≤ 1 900	3 810 ≤ 4 826	± 2	± 20	± 2		10
	2 000 ≤ 2 360	5 080 ≤ 5 994	± 4	± 20	± 4		10
	2 500 ≤ 3 000	6 350 ≤ 7 620	± 4	± 20	± 4		16
	3 150 ≤ 3 750	8 001 ≤ 9 525	± 6	± 25	± 6		16
	4 000	10 160	± 8	± 25	± 8		16
	4 250 ≤ 4 500	10 795 ≤ 11 430	± 8	± 30	± 8		16
	4 750 ≤ 5 000	12 065 ≤ 12 700	± 12	± 30	± 12		24

Table 74: Double section V-belts

Section	Reference length (mm)	Length tolerance (mm) Permissible deviation of the reference lengths	Set tolerance (mm) Permissible difference between the reference lengths of the double section V-belts in one and the same set on multiple belt drives
AA/HAA BB/HBB CC/HCC DD/HDD 22 x 22 25 x 22	1 250 < 1 320	+ 8/– 16	4
	1 320 < 1 700	+ 9/– 18	4
	1 700 < 2 120	+ 11/– 22	5
	2 120 < 2 650	+ 13/– 26	6.3
	2 650 < 3 350	+ 15/– 30	8
	3 350 < 4 250	+ 18/– 36	10
	4 250 < 5 300	+ 22/– 44	12.5
	5 300 < 6 700	+ 26/– 52	16
	6 700 < 8 500	+ 32/– 64	20
	8 500 < 10 000	+ 39/– 78	25

Table 75: Kraftbands with high performance wedge belts and classical V-belts

Section	Length and set tolerances
3V/9J; 3VX/9JX 5V/15J; 5VX/15JX 8V/25J	USA Standard RMA/MPTA
SPZ; SPA; SPB; SPC	BS/DIN/ISO
A/HA B/HB C/HC D/HD	BS/DIN/ASAE

* Maximum production length for raw edge V-belts ≤ 3550 mm

Design Hints

Conversion Factors



Optibelt SK high performance wedge belts BS 3790/DIN 7753 Part 1

Section	Cross-section b x h ≈	Section base width b _u ≈	Datum width b _d	Belt length				Recommended minimum pulley diameter (mm)		Belt weight (≈ kg/m)
				Nominal length	Outside length L _o	Datum length L _d	Inside length L _i			
SPZ	9.7 x 8	4.2	8.5	Datum length L _d	$L_o \approx L_i + 13$ $L_o \approx L_d + 51$	—	$L_i \approx L_d - 38$ $L_i \approx L_o - 51$	Datum diameter d _d	63	0.074
SPA	12.7 x 10	5.8	11.0		$L_o \approx L_i + 18$ $L_o \approx L_d + 63$	—	$L_i \approx L_d - 45$ $L_i \approx L_o - 63$		90	0.123
SPB	16.3 x 13	7.3	14.0		$L_o \approx L_i + 22$ $L_o \approx L_d + 82$	—	$L_i \approx L_d - 60$ $L_i \approx L_o - 82$		140	0.195
SPC	22.0 x 18	9.6	19.0		$L_o \approx L_i + 30$ $L_o \approx L_d + 113$	—	$L_i \approx L_d - 83$ $L_i \approx L_o - 113$		224	0.377

Optibelt SK high performance wedge belts USA Standard RMA/MTPA

3V/9N	9.0 x 8	4.2	—	Outside length L _o	—	$L_d \approx L_o - 4^*$	$L_i \approx L_o - 42$	Outside diameter d _o	63	0.074
5V/15N	15.0 x 13	7.3	—		—	$L_d \approx L_o - 11^*$	$L_i \approx L_o - 71$		140	0.195
8V/25N	25.0 x 23	9.6	—		—	—	$L_i \approx L_o - 120$		335	0.575

* The conversion factors L_d to L_o is used when a section according to DIN 7753 Part 1 is to be replaced by the corresponding section according to RMA/MPTA.

Optibelt Super X-POWER M=S wedge belts – raw edge, moulded cogged – BS 3790/DIN 7753 Part 1

XPZ	9.7 x 8	4.2	8.5	Datum length L _d	$L_o \approx L_i + 13$ $L_o \approx L_d + 51$	—	$L_i \approx L_d - 38$ $L_i \approx L_o - 51$	Datum diameter d _d	56	0.065
XPA	12.7 x 10	5.8	11.0		$L_o \approx L_i + 18$ $L_o \approx L_d + 63$	—	$L_i \approx L_d - 45$ $L_i \approx L_o - 63$		71	0.111
XPB	16.3 x 13	7.3	14.0		$L_o \approx L_i + 22$ $L_o \approx L_d + 82$	—	$L_i \approx L_d - 60$ $L_i \approx L_o - 82$		112	0.183
XPC	22.0 x 18	9.6	19.0		$L_o \approx L_i + 30$ $L_o \approx L_d + 113$	—	$L_i \approx L_d - 83$ $L_i \approx L_o - 113$		180	0.340

Optibelt Super X-POWER M=S wedge belts – raw edge, moulded cogged – USA Standard RMA/MTPA

3VX/9NX	9.0 x 8	4.2	—	Outside length L _o	—	$L_d \approx L_o - 4^*$	$L_i \approx L_o - 42$	Outside diameter d _o	56	0.065
5VX/15NX	15.0 x 13	7.3	—		—	$L_d \approx L_o - 11^*$	$L_i \approx L_o - 71$		112	0.183

* The conversion factors L_d to L_o is used when a section to BS 3790 or DIN 7753 Part 1 is to be replaced by the corresponding section to RMA/MPTA.

Optibelt SUPER TX M=S V-belts – raw edge, moulded cogged

ZX/X10	10.0 x 6	5.9	8.5	Datum length L _d	$L_o \approx L_i + 38$ $L_o \approx L_d + 16$	—	$L_i \approx L_d - 22$ $L_i \approx L_o - 38$	Datum diameter d _d	40	0.062
AX/X13	13.0 x 8	7.5	11.0		$L_o \approx L_i + 50$ $L_o \approx L_d + 20$	—	$L_i \approx L_d - 30$ $L_i \approx L_o - 50$		63	0.099
BX/X17	17.0 x 11	9.4	14.0		$L_o \approx L_i + 69$ $L_o \approx L_d + 29$	—	$L_i \approx L_d - 40$ $L_i \approx L_o - 69$		90	0.165
CX/X22	22.0 x 14	12.3	19.0		$L_o \approx L_i + 88$ $L_o \approx L_d + 30$	—	$L_i \approx L_d - 58$ $L_i \approx L_o - 88$		140	0.276

Optibelt VB classical V-belts BS 3790/DIN 2215

5	5.0 x 3	2.8	4.2	Datum length L _d	$L_o \approx L_i + 19$ $L_o \approx L_d + 8$	$L_d \approx L_i + 11$ $L_d \approx L_o - 8$	—	Datum diameter d _d	20	0.018
Y/6	6.0 x 4	3.3	5.3		$L_o \approx L_i + 25$ $L_o \approx L_d + 10$	$L_d \approx L_i + 15$ $L_d \approx L_o - 10$	—		28	0.026
8	8.0 x 5	4.5	6.7		$L_o \approx L_i + 31$ $L_o \approx L_d + 12$	$L_d \approx L_i + 19$ $L_d \approx L_o - 12$	—		40	0.042
Z/10	10.0 x 6	5.9	8.5		$L_o \approx L_i + 38$ $L_o \approx L_d + 16$	$L_d \approx L_i + 22$ $L_d \approx L_o - 16$	—		50	0.064
A/13	13.0 x 8	7.5	11.0		$L_o \approx L_i + 50$ $L_o \approx L_d + 20$	$L_d \approx L_i + 30$ $L_d \approx L_o - 20$	—		71	0.109
B/17	17.0 x 11	9.4	14.0		$L_o \approx L_i + 69$ $L_o \approx L_d + 29$	$L_d \approx L_i + 40$ $L_d \approx L_o - 29$	—		112	0.196
20	20.0 x 12.5	11.4	17.0		$L_o \approx L_i + 79$ $L_o \approx L_d + 31$	$L_d \approx L_i + 48$ $L_d \approx L_o - 31$	—		160	0.266
C/22	22.0 x 14	12.3	19.0		$L_o \approx L_i + 88$ $L_o \approx L_d + 30$	$L_d \approx L_i + 58$ $L_d \approx L_o - 30$	—		180	0.324
25	25.0 x 16	14.0	21.0		$L_o \approx L_i + 100$ $L_o \approx L_d + 39$	$L_d \approx L_i + 61$ $L_d \approx L_o - 39$	—		250	0.420
D/32	32.0 x 20	18.2	27.0		$L_o \approx L_i + 126$ $L_o \approx L_d + 51$	$L_d \approx L_i + 75$ $L_d \approx L_o - 51$	—		355	0.668
E/40	40.0 x 25	22.8	32.0		$L_o \approx L_i + 157$ $L_o \approx L_d + 77$	$L_d \approx L_i + 80$ $L_d \approx L_o - 77$	—		500	0.958

Design Hints

Conversion Factors



Optibelt KB Kraftbands with high performance wedge belts to ISO 5290/USA Standard RMA/MTPA

Section	Height h ≈	Bottom width b _u ≈ of the single belts	Belt length				Recommended minimum pulley diameter (mm)		Rib weight (≈ kg/m)
			Nominal length	Outside length L _a	Datum length L _d	Inside length L _i			
3V/9J	9.9	4.2	Outside length L _a	—	—	L _i ≈ L _a - 42	Outside diameter d _a	67	0.122
5V/15J	15.1	7.3		—	—	L _i ≈ L _a - 71		180	0.252
8V/25J	25.5	9.6		—	—	L _i ≈ L _a - 120		315	0.693

Optibelt KB Kraftbands with high performance wedge belts

SPZ	10.5	5.4	Datum length L _d	L _a ≈ L _d + 13	—	—	Datum diameter d _d	80	0.120
SPA	12.5	7.0		L _a ≈ L _d + 18	—	—		112	0.166
SPB	15.6	8.8		L _a ≈ L _d + 22	—	—		160	0.261
SPC	22.6	9.3		L _a ≈ L _d + 24	—	—		250	0.555

Optibelt KB Kraftbands USA Standard RMA/MTPA

A	9.9	7.5	Datum length L _d	L _a ≈ L _i + 36	L _d ≈ L _i + 30	—	Datum diameter d _d	80	0.163
B	13.0	9.4		L _a ≈ L _i + 62	L _d ≈ L _i + 40	—		125	0.266
C	16.2	12.3		L _a ≈ L _i + 75	L _d ≈ L _i + 58	—		200	0.447
D	22.4	18.2		L _a ≈ L _i + 111	L _d ≈ L _i + 75	—		355	0.798

Optibelt KB Kraftbands USA Standard ASAE S 211. ...

HA	9.9	7.5	Outside length L _a	—	—	L _i ≈ L _a - 36	Outside diameter d _a	80	0.163
HB	13.0	9.4		—	—	L _i ≈ L _a - 62		125	0.266
HC	16.2	12.3		—	—	L _i ≈ L _a - 75		200	0.447
HD	22.4	18.2		—	—	L _i ≈ L _a - 111		355	0.798

* The width of the kraftband is a function of the number of ribs.

Optibelt DK double section V-belt DIN 7722/ISO 5289

Section	Cross-section b x h ≈	Section bottom width b _u ≈	Datum length	Belt length	Recommended minimum pulley diameter (mm)	Belt weight (≈ kg/m)
AA/HAA	13 x 10	—	Reference length	Reference length ≈ mean length - 4	Outside diameter d _a	80
BB/HBB	17 x 13	—		Reference length ≈ mean length - 8		125
CC/HCC	22 x 17	—		Reference length ≈ mean length + 3		224
DD/HDD	32 x 25	—		Reference length = mean length		355

Optibelt DK double section V-belt DIN 7722/ISO 5289s

22 x 22	22 x 22	—	Reference length	Reference length = mean length	Outside diameter d _a	280
25 x 22	25 x 22	—		Reference length = mean length		280

Optibelt FB automotive fan belts

Section	Cross-section b x h ≈	Section bottom width b _u ≈	Datum width b _d	Belt length				Recommended minimum pulley diameter (mm)	Belt weight (≈ kg/m)
				Nominal length	Outside length L _a	Datum length L _d	Inside length L _i		
9.5	10 x 8	4.9	8.5	Outside length L _a	—	L _d ≈ L _a - 13	L _i ≈ L _a - 51	Agreed between vehicle and belt manufacturers	0.070
12.5	13 x 10	5.8	11.0		—	L _d ≈ L _a - 18	L _i ≈ L _a - 63		0.118

Optibelt Marathon 1/Marathon 2 M=S automotive V-belts – raw edge, moulded cogg, maintenance free

AVX 10	10 x 8	4.9	8.5	Outside length L _a	—	L _d ≈ L _a - 13	L _i ≈ L _a - 51	Agreed between vehicle and belt manufacturers	0.076
AVX 13	13 x 10	5.8	11.0		—	L _d ≈ L _a - 18	L _i ≈ L _a - 63		0.118

Special Purpose Conveyor Belts

Product Description



Power Transmission

Optibelt have developed a series of special purpose conveyor belts for the economical transportation of goods in a varied range of applications.

- Optibelt PKR endless V-belts according to DIN 2215 with patterned top surfaces
- Optibelt PKR endless V-belts according to DIN 2215 with light coloured fabric cover and patterned top surfaces within the standard belt height
- Optibelt KB Kraftbands with patterned top surfaces
- Optibelt PKR open-ended V-belts to DIN 2216 with patterned top surfaces
- Optibelt FK open-ended conveyor belting, punched
- Optimax HF high performance flat belts

Construction/Quality

Optibelt special purpose conveyor belts consist of the base belt and the top surface. These parts are specially vulcanised to each other to provide the maximum resistance to separation during service. The multiplicity of applications necessitate constructions with numerous patterns which can be supplied in two different qualities. Both the pattern and the surface quality should be chosen to suit the specific application.

Table 76

Design/ Colour	Temperature resistance (°C)	Hardness (Shore A)	Oil resistance	Marking
SBR-NR/ light coloured	- 40 to + 70	≈ 55* ≈ 65**	no	no
CR/black	- 25 to +100	≈ 65	limited	yes

CR/black is supplied as standard. We would be pleased to supply details of other designs.

SBR = styrene butadiene rubber

NR = natural rubber


CR = chloroprene rubber

* ≈ 55 for surface over the standard height

** ≈ 65 for surface within the standard height

Properties

Special surfaced belts are used in place of expensive conventional type conveyor belts. They run individually, or in sets arranged adjacent to each other, transporting goods horizontally, or up or down inclines. Vertical conveying is also possible if the belts are arranged top surface to top surface gripping the articles between them.

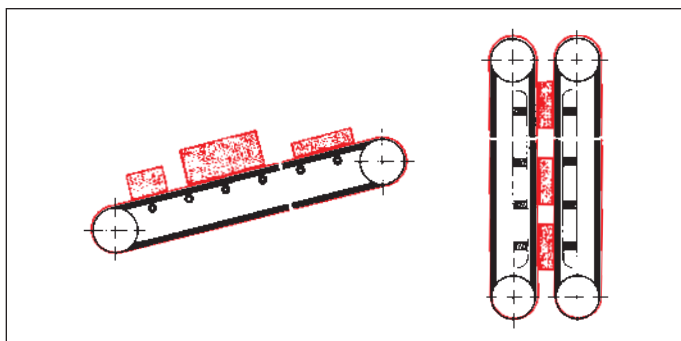

Applications

Here are just a few examples from the wide range of applications in which Optibelt conveyor belts are used successfully.

For transporting:

- doors, cupboard components, veneer and plastic panels in the woodworking industry
- body parts and sharp-edged sheet metal panels in the automobile industry
- cardboard and boxes in the packaging industry
- roof tiles, concrete slabs and paviers in cement works
- tiles
- sheet glass
- parcels
- bowling alley balls


In addition to conveyor applications, these belts are also used for:

- labelling and closing tins, bottles and jars in the preserves industry
- lifting, topping and sorting beet, potatoes, lettuce, cauliflower and sprouts and many other vegetables

Because of their single belt characteristics and high permissible surface loading, Optibelt KB Kraftbands are especially suitable in conveyor systems and lifting platforms for:

- transporting cargo container
- loading and unloading aeroplanes and railway wagons
- stowing and discharging ships cargoes

Optibelt KB with top surface

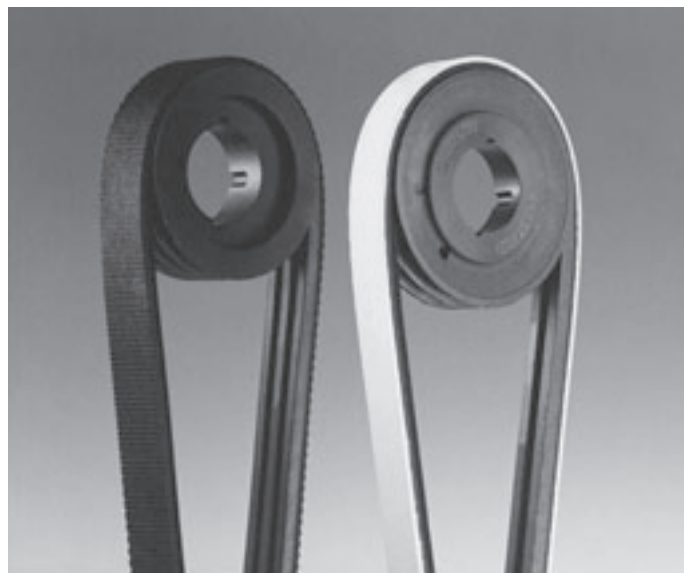

Special Purpose Conveyor Belts

Design Guidelines



Power Transmission

Drive and Guide Pulleys

The drive and guide pulleys should be V-grooved pulleys. The minimum diameters should be selected in accordance with the standard recommendations for V-belts and kraftbands. See the chapter on V-pulleys.

Due to the relatively low transporting speed (experience shows that it is usually less than 1 m/s) and the resulting low flex rate, pulley diameters can be reduced to approx. 10 % below the recommended minimum. With greater reduction, there is the danger that the top surface separates from the base V-belt.

The driver pulley should be arranged at the discharge end of the conveyor so that the goods are pulled along.

The diameter and the number of support rollers required depends upon the length of the conveying span and the weight and size of the goods to be transported.

Support tracks, generally made of plastic, are either flat or with a key seat to improve guidance of the conveyor belt. As is the case with the support rollers, the grooves must be of an adequate width.


Adjustment of the Drive Centre Distance Allowances

The tables on pages 76 to 78 show the drive centre distance allowances applicable to special purpose conveyor belts and kraftbands.

Support Rollers/Tracks

In most cases, support rollers or tracks are required to prevent the belt from sagging under load.

Support rollers may be flat faced or V-pulleys. The dimensions of the pulley grooves should be such that the conveyor belt is supported on its base in the groove bottom, and can only run with one edge in contact with the groove flank, and as a consequence does not become trapped in the groove.





Options for Tensioning

An adequate belt tension is essential to the reliable operation of the conveyor system. Tension is applied by adjusting the drive centre distance or, when the centres are fixed, by the use of tension idlers.

When idlers are employed, they should be arranged inside the belt if possible, as otherwise the alternating flexing of the belt will reduce its service life.

optibelt KB Kraftbands with Patterned Top Surface

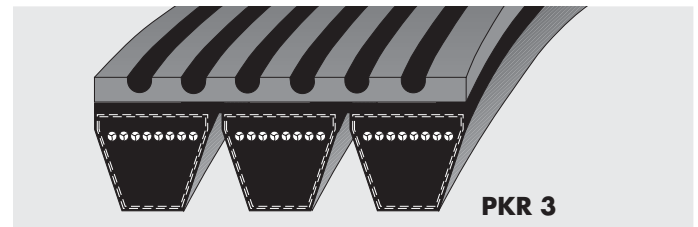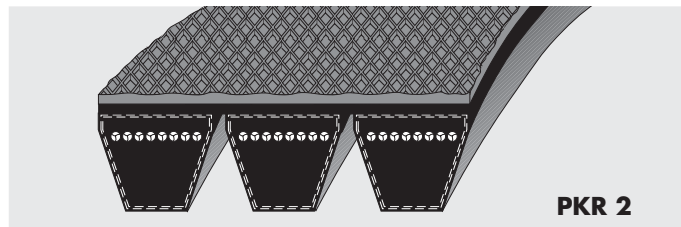

Pattern	Height of surface		Pitch (mm)	Groove width (mm)
	Standard (mm)	Maximum (mm)		
PKR 0	3	5	—	—
PKR 1	3	5	10	—
PKR 2	3	5	—	—
PKR 3	5	—	—	3.7

Design/Colour	Temperature resistance (°C)	Hardness (Shore A)	Oil resistance	Marking
SBR-NR/light	–40 to +70	≈ 55	no	no
CR/black	–25 to +100	≈ 65	limited	yes

SBR = styrene butadiene rubber
NR = natural rubber
CR = chloroprene rubber

Table 77

Section	Cross-sectional dimensions of the base belt (mm)	Kraftband height without top surface (mm)	Length designation	Length (mm)	Max. production length (mm)	Pattern type			
						PKR 0	PKR 1	PKR 2	PKR 3
3V/9J	9 x 8	9.9	500 ≤ 1400	1400 ≤ 3556 L _o	4250	●	●	●	—
5V/15J	15 x 13	15.1	500 ≤ 3550	1400 ≤ 9017 L _o	10 000	●	●	●	—
8V/25J	25 x 23	25.5	1000 ≤ 4750	2540 ≤ 12065 L _o	15 000	●	●	●	—
SPB	16.3 x 13	15.6	—	2400 ≤ 6 000 L _d	6 000	●	●	●	—
A/HA	13 x 8	9.9	—	1400 ≤ 5000 L _i	8 000	●	●	●	—
				2850 ≤ 8000 L _i	on request	—	—	—	●
B/HB	17 x 11	13.0	—	1400 ≤ 7100 L _i	10 000	●	●	●	—
C/HC	22 x 14	16.2	—	2286 ≤ 7100 L _i	12 000	●	●	●	—

L_o = outside length; L_i = inside length; L_d = datum length

Range: see page 30, 31 and 33. Minimum order quantity on request.

Special Purpose Conveyor Belts

optibelt *PKR* Endless V-Belts

and optibelt *KB* Kraftband with Patterned Top Surface

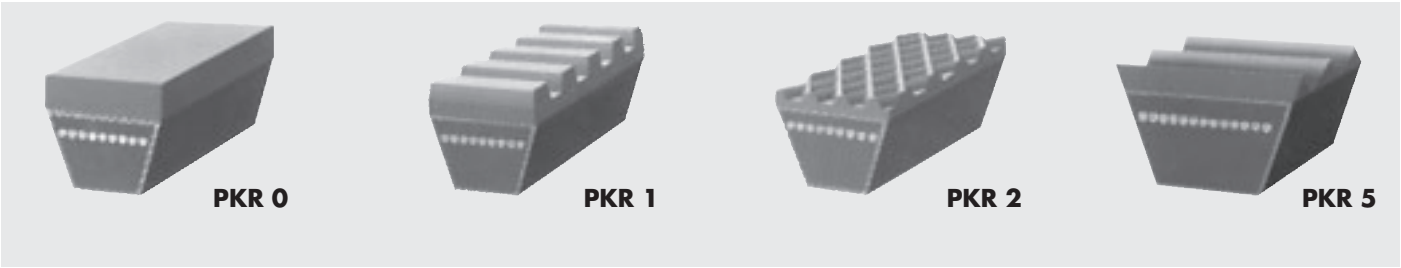


Table 78

Pattern	Height of top surface		Pitch (mm)	Groove width (mm)
	Standard (mm)	maximum (mm)		
PKR 0	3	5	—	—
PKR 1	3	5	10	—
PKR 2	3	5	—	—
PKR 5	5	—	13	—

Table 79

Design/Colour	Temperature resistance (°C)	Hardness (Shore A)	Oil resistance	Marking
SBR-NR/light	– 40 to + 70	≈ 55*/65**	no	no
CR/black	– 25 to + 100	≈ 65	limited	yes

SBR = styrene butadiene rubber
NR = natural rubber
CR = chloroprene rubber

* ≈ 55 for top surface above the standard height
** ≈ 65 for top surface within the standard height

Table 80

Top surfaces above the standard height							Top surfaces 3 or 5 mm above the standard height	
Section	Stand- ard height (mm)	Standard inside length (mm)	Pattern type				Minimum order quantities for V-belts patterned top surfaces PKR 0; PKR 1; PKR 2; PKR 5	
			PKR 0	PKR 1	PKR 2	PKR 5	for standard range (as listed on pages 24 to 27)	for intermediate length (sizes not listed in this technical manual)
A/13	8.0	1 200 ≤ 5 000 ¹⁾	●	●	●	—	18 pcs	31 pcs
B/17	11.0	1 200 ≤ 2 000 ¹⁾	●	●	●	—	15 pcs	50 pcs
		2 001 ≤ 7 100 ¹⁾	●	●	●	—	15 pcs	42 pcs
20	12.5	1 850 ≤ 2 000 ²⁾	●	●	●	—	13 pcs	21 pcs
		2 001 ≤ 8 000 ²⁾	●	●	●	—	13 pcs	36 pcs
C/22	14.0	1 850 ≤ 2 000 ²⁾	●	●	●	—	12 pcs	57 pcs
		2 001 ≤ 10 000 ²⁾	●	●	●	—	12 pcs	48 pcs
25	16.0	1 850 ≤ 2 000 ²⁾	●	●	●	—	11 pcs	51 pcs
		2 001 ≤ 10 000 ²⁾	●	●	●	—	11 pcs	42 pcs
D/32	20.0	2 850 ≤ 12 500 ²⁾	●	●	●	—	9 pcs	22 pcs
		2 850 ≤ 12 500 ²⁾	—	—	—	● ³⁾	8 pcs	8 pcs
E/40	25.0	—	—	—	—	—	on request	on request
1) Maximum production length on request			2) Maximum production length 21 000 mm					
3) Only available in CR/black			Section Z/10 on request					

Table 81

Top surface within the standard height			
Standard inside length (mm)	Pattern type		Mini- mum quan- tity
	PKR 0	PKR 2	
3 550 ≤ 10 000 ¹⁾	●	●	10
2 850 ≤ 21 000 ¹⁾	●	●	10
3 550 ≤ 21 000 ¹⁾	●	●	8
3 550 ≤ 21 000 ¹⁾	●	●	8
2 850 ≤ 21 000 ¹⁾	●	●	8
2 850 ≤ 21 000 ¹⁾	●	●	6
4 000 ≤ 21 000 ¹⁾	●	●	5

When ordering, please state the overall height of the V-belt including top surface. This is indicated by the section designation as follows.

Section B/17 – top surface within the standard height = 17 x 11
Section B/17 – with additional 3 mm top surface = 17 x 14
Section B/17 – with additional 5 mm top surface = 17 x 16

Special Purpose Conveyor Belts

optimat *PKR* Open-Ended V-Belting according to DIN 2216

with Patterned Top Surface

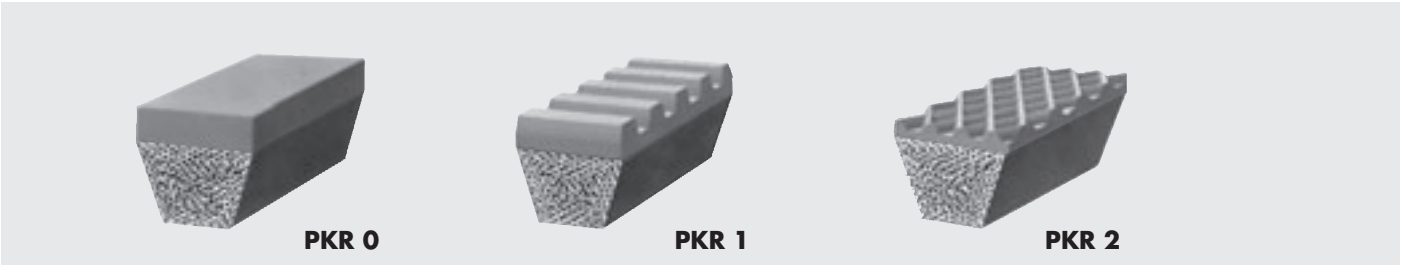


Table 82

Section	PKR 0 CR/red brown		PKR 0 SBR-NR/light coloured		PKR 1		PKR 2	
	S	P	S	P	S	P	S	P
Z/10	●	●	—	—	—	—	—	—
A/13	●	●	●	●	●	●	●	●
B/17	●	●	●	●	●	●	●	●
C/22	●	●	●	●	●	●	●	●
25	●	●	●	●	●	●	●	●
D/32	●	●	●	●	●	●	—	—

S = Standard; P = Polyester

Table 83


Pattern types	Top surface height		Pitch (mm)
	Standard (mm)	Max. (mm)	
PKR 0	2	3	—
PKR 1 A/13; B/17; C/22	3	3	10
PKR 1 25; D/32	5	5	10
PKR 2	3	—	—

Table 84

Design/ Colour	Temperature resistance (°C)	Hardness (Shore A)	Oil resistance	Marking
PKR 0				
CR/red brown	– 25 to + 100	≈ 50	limited	no
SBR-NR/light coloured	– 40 to + 70	≈ 45	no	no
PKR 1 and PKR 2				
NR/red brown	– 40 to + 70	≈ 48	no	no
SBR-NR/light coloured	– 40 to + 70	≈ 45	no	no
CR/red brown	– 25 to + 100	≈ 50	limited	no
CR/black	– 25 to + 100	≈ 68	limited	yes

Special Purpose Conveyor Belts

optibelt RR Plastic Round Section Belting, **optibelt KK** Plastic V-Belting

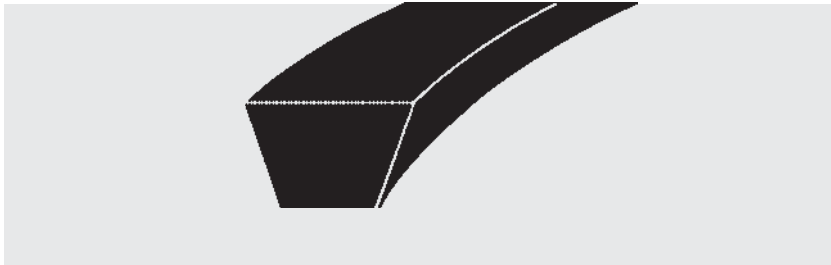

Section	Width x Height (mm)	Length of roll (m)	Diameter (mm)	Length of roll (m)	Weight (≈ kg/m)
8	8 x 5	50	2	200	0.004
Z/10	10 x 6	50	3	200	0.009
A/13	13 x 8	50	4	200	0.016
B/17	17 x 11	50	5	200	0.024
C/22	22 x 14	25	6	100	0.035
			7	100	0.048
			8	100	0.064
			10	100	0.096
			12	50	0.132
			15	50	0.211

Optibelt RR round section belting and Optibelt KK plastic V-belting are especially suited as transporting elements in the food industry, in ceramic industry plants, and for applications where oils and chemicals might be present. They can also be used as drive elements for specific ranges of capacity. Optibelt supplies different qualities that can be easily distinguished due to their different colours.

Minimum lengths for endless connection:
Round section belting: 200 mm
V-belting: Section Z/10 to A/13: 300 mm
Section B/17: 500 mm
Section C/22: 700 mm

optibelt KK Plastic V-Belting with Special Top Surface (base belt white, 92 Shore A) Plastic V-Belting with Pointed Top Profile



Section	Width x Height (mm)	Length of roll (m)	Form	Section	Length of roll (m)
8	8 x 5	50	1	A/13	25
Z/10	10 x 6	50	2	A/13	25
A/13	13 x 8	50	1	B/17	25
B/17	17 x 11	50	2	B/17	25
C/22	22 x 14	25	1	C/22	25
			2	C/22	25

Annex

Table of Standards



Federal Republic of Germany

- DIN 109 Sheet 1 – Drive elements, circumferential speeds
- DIN 109 Sheet 2 – Drive elements, drive centre distances for V-belt drives
- DIN 111 – Flat belts; dimensions, nominal torque
- DIN 111 Sheet 2 – Flat belts – specification for electrical machines
- DIN 2211 Sheet 1 – V-belts; dimensions; material
- DIN 2211 Sheet 2 – V-belts; testing the grooves
- DIN 2211 Sheet 3 – Wedge belts; specification for electrical machines
- DIN 2215 – Endless V-belts, classical sections; minimum pulley datum diameters, inside and datum belt lengths
- DIN 2216 – Open-ended V-belt; dimensions
- DIN 2217 Sheet 1 – V-belt pulleys for classical sections; dimensions, material
- DIN 2217 Sheet 2 – V-belt pulleys for classical sections; groove checking
- DIN 2218 – Endless V-belts, classical sections for industrial engineering applications; drive design, power ratings
- DIN 7716 – Natural and synthetic rubber products; storage, cleaning and maintenance requirements
- DIN 7719 Part 1 – Endless variable speed belts for industrial speed changers; belts and groove sections of the corresponding pulleys
- DIN 7719 Part 2 – Endless variable speed belts for industrial speed changers; measuring the shaft centre distance fluctuation
- DIN 7721 Part 1 – Synchronous belt drives, metric pitch; timing belts
- DIN 7721 Part 2 – Synchronous belt drives, metric pitch; tooth profile for synchronous pulleys
- DIN 7722 – Endless hexagonal belts for agricultural machinery and groove sections of the corresponding pulleys
- DIN 7753 Part 1 – Endless wedge belts for industrial engineering applications; dimensions
- DIN 7753 Part 2 – Endless wedge belts for industrial engineering applications; drive design and power ratings
- DIN 7753 Part 3 – Endless wedge belts for automotive engineering applications; dimensions
- DIN 7753 Part 4 – Endless wedge belts for automotive engineering applications; fatigue testing
- DIN 7867 – Ribbed belts and pulleys
- DIN/ISO 5290 – Joined wedge belts section 9J; 15J; 20J; 25J
- DIN/ISO 5294 – Timing belt drives; pulleys
- DIN/ISO 5296 – Timing belt drives; belts
- DIN 22100-7 – Working conditions for plastics for use in the mining industry, part 5.4 V-belts
- DIN EN 60695-11-10 – Testing for the evaluation of flammability

ISO International Organisation for Standardisation

- ISO 22 – The widths of flat belts and corresponding pulleys
- ISO 63 – Flat belt drives; lengths
- ISO 99 – Diameter of pulleys for flat belts
- ISO 100 – Crown height of pulleys for flat belts
- ISO 155 – Drive pulleys; limits for setting drive centre distances
- ISO 254 – Type, quality and balancing of pulleys
- ISO 255 – Pulleys for classical V-belts and wedge belts; geometrical groove checking
- ISO 1081 – Drives with V-belts and grooved pulleys; terminology
- ISO 1604 – Endless variable speed belts and pulleys for industrial engineering applications
- ISO 1813 – Endless V-belts; electrical conductivity
- ISO 2230 – See DIN 7716
- ISO 2790 – Wedge belt drives for the automotive industry; dimensions
- ISO 3410 – Endless variable speed belts and pulleys for agricultural applications
- ISO 4183 – Grooved pulleys for classical V-belts and wedge belts
- ISO 4184 – Classical V-belts and wedge belts; lengths
- ISO 5256 – Synchronous belt drive; belt tooth pitch coding
 - Part 1 MXL; XL; L; H; XH; XXH
 - Part 2 MXL; XXL metric sizes
- ISO 5287 – Wedge belt drives for the automotive industry; fatigue testing
- ISO 5288 – Timing belt drives; definitions

- ISO 5289 – Endless double section belts and pulleys for agricultural applications
- ISO 5290 – Joined wedge belt pulleys; groove sections 9J; 15J; 20J; 25J;
- ISO 5291 – Joined classical V-belt pulleys; groove sections AJ; BJ; CJ; DJ
- ISO 5292 – Industrial V-belt drives; calculating ratings and drive centre distances
- ISO 5294 – Synchronous belt drives; pulleys
- ISO 5295 – Timing belts; calculating ratings and drive centre distances
- ISO 5296 – Synchronous belt drives; belts
- ISO 8370-1 – Dynamic testing for determining the effective area with V-belts
- ISO 8370-2 – Dynamic testing for determining the effective area with ribbed belts
- ISO/DIS 8419 – Joined wedge belt drives, lengths in the datum system
- ISO/CD 9010 – Synchronous belt drives – belts for the automotive industry
- ISO/CD 9011 – Synchronous belt drives – pulleys for the automotive industry
- ISO 9563 – Anti-static endless timing belts; electrical conductivity; characteristics and test methods
- ISO 9980 – Belt drives; V-belt pulleys; checking the geometry of the pulley grooves
- ISO 9981 – Belt drives – pulleys and ribbed belts for the automotive industry; section PK
- ISO 9982 – Belt drives – pulleys and ribbed belts for industrial applications; geometric data PH, PJ, PK, PL and PM
- ISO 9982 – See DIN 7867
- ISO 11749 – Belt drives, V-ribbed for automotive applications, life testing
- ISO 12046 – Synchronous automotive belt drives, physical properties
- ISO/CD 13050 – Synchronous curvilinear belt drives
- ISO/CD 17396 – Synchronous metric belt drives, sections T and AT

United Kingdom

- BS 3733 – Endless classical section V-belts for agricultural applications
- BS 3790 – Drives with endless wedge belts and V-belts
- BS AU 150 – Endless wedge belts for the automotive industry

USA

- RMA/MPTA IP-20 – Classical V-Belts and Sheaves (A; B; C; D; Cross Sections)
- RMA/MPTA IP-21 – Double (Hexagonal) Belts (AA; BB; CC; DD Cross Sections)
- RMA/MPTA IP-22 – Narrow Multiple V-Belts (3V; 5V; and 8V Cross Sections)
- RMA/MPTA IP-23 – Single V-Belts (2L; 3L; 4L; and 5L Cross Sections)
- RMA/MPTA IP-24 – Synchronous Belts (MXL; XL; L; H; XH; and XXH Belt Sections)
- RMA/MPTA IP-25 – Variable Speed V-Belts (12 Cross Sections)
- RMA/MPTA IP-26 – V-Ribbed Belts (PH; PJ; PK, PL and PM Cross Sections)
- RMA/MPTA IP-27 – Curvilinear Toothed Synchronous Belts (8M – 14M Pitches)
- ASAE S 211.1... – V-Belt Drives for Agricultural Machines
- SAE J636b – V-Belts and Pulleys
- SAE J637 – Automotive V-Belt Drives

Notes



Power Transmission

[illegible]

Notes



Power Transmission

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Data Sheet

for Calculation/Check of Drive



Power Transmission

Optibelt GmbH
Corveyer Allee 15
37671 Hörter/Germany
Tel. +49 (0)5271/ 62-1
Fax +49 (0)5271/ 9762 00
info@optibelt.com
www.optibelt.com

Company

(stamp)

For test ☐ New drive ☐
For initial production ☐ Existing drive ☐
For series production ☐ Usage _____ belts/year

Fitted with:

Number	Size	Manufacturer

Prime Mover

Type (e.g. electric motor, diesel engine 3 cyl.) _____
Size of starting torque (e.g. $M_A = 1.8 M_N$) _____
Method of starting (e.g. star delta) _____
Operational hours per day _____ hours
Number of starts _____ per hour ☐ per day ☐
Rational reverses _____ per minute ☐ per hour ☐
Power: P normal _____ kW
P maximum _____ kW
or maximum torque _____ Nm at n_1 _____ r.p.m.
Speed n_1 _____ r.p.m.
Position of shafts: horizontal ☐ vertical ☐
angled ☐ α _____ °
Maximum allowable shaft loading $S_{a \max}$ _____ N
Datum or outside diameter of pulley:
 d_{d1} _____ mm d_{a1} _____ mm
 $d_{d1 \min}$ _____ mm $d_{a1 \min}$ _____ mm
 $d_{d1 \max}$ _____ mm $d_{a1 \max}$ _____ mm
Pulley face width $b_{2 \max}$ _____ mm

Speed ratio i _____
Centre distance a _____ mm
Tension/guide pulleys: inside ☐
outside ☐
 d_d _____ mm V-pulley ☐
 d_a _____ mm Flat pulley ☐

Operating Conditions: Ambient temperature

Exposure to oil ☐
water ☐
acid ☐
dust ☐

Driven Machine

Type (e.g. lathe, compressor) _____
Start: loaded ☐ unloaded ☐
Nature of load: constant ☐ pulsating ☐
shock ☐
Rating: P normal _____ kW
P maximum _____ kW
or maximum torque _____ Nm at n_2 _____ r.p.m.
Speed n_2 _____ r.p.m.
 $n_{2 \min}$ _____ r.p.m.
 $n_{2 \max}$ _____ r.p.m.
Maximum allowable shaft loading $S_{a \max}$ _____ Newton
Datum or outside diameter of pulley:
 d_{d2} _____ mm d_{a2} _____ mm
 $d_{d2 \min}$ _____ mm $d_{a2 \min}$ _____ mm
 $d_{d2 \max}$ _____ mm $d_{a2 \max}$ _____ mm
Pulley face width $b_{2 \max}$ _____ mm

$i_{\min}$ _____ $i_{\max}$ _____
 $a_{\min}$ _____ mm $a_{\max}$ _____ mm
in drive slack side ☐
in drive tight side ☐
movable ☐ (e.g. spring loaded) _____
fixed ☐

_____ °C minimum
_____ °C maximum
(e.g. oil mist, droplets) _____
(e.g. spray) _____
(type, concentration, temperature) _____
(type) _____

Special conditions: Where the drive is subjected to unusual conditions, e.g. inside or outside idler pulleys, three or multi-pulley drives, as well as drives with reverse rotational direction, sketches are required. Please use the back of this data sheet for sketches.



Drive description:

Data Sheet

for Calculating/Checking Conveyor Systems



Power Transmission

Optibelt GmbH
Corveyer Allee 15
37671 Hörter/Germany
Tel. +49 (0)5271/ 62-1
Fax +49 (0)5271/ 9762 00
info@optibelt.com
www.optibelt.com

Company

(stamp)

For one off use ☐
For series production ☐
Usage _____ belts/year

New drive ☐
Existing drive ☐

Fitted with:

Number	Section length	Top surface	Manufacturer

Prime Mover

Type (e.g. geared motor) _____

Size of starting torque (e.g. $M_A = 1.8 M_N$) _____

Method of starting (e.g. star delta) _____

Start _____ under load ☐
unloaded ☐

Operational hours per day _____ hours

Number of starts _____ per hour ☐ per day ☐

Power: P normal _____ kW

P maximum _____ kW

or maximum torque _____ Nm at n_1 _____ r.p.m.Rotational speed n_1 _____ r.p.m.Rotational speed n_2 _____ r.p.m.

Conveying speed min. _____ m/min
max. _____ m/min

Continuously variable yes ☐
no ☐

Maximum allowable shaft loading $S_{a \max}$ _____ Newton

Datum or outside diameter of the driver pulley:

 d_{d1} _____ mm d_{a1} _____ mm $d_{d1 \min}$ _____ mm $d_{a1 \min}$ _____ mm $d_{d1 \max}$ _____ mm $d_{a1 \max}$ _____ mm

Datum or outside diameter of the guide pulleys:

 d_{d2} _____ mm d_{a2} _____ mm $d_{d2 \min}$ _____ mm $d_{a2 \min}$ _____ mm $d_{d2 \max}$ _____ mm $d_{a2 \max}$ _____ mmSpeed ratio i _____ $i_{\min}$ _____ $i_{\max}$ _____

Position of shafts: horizontal ☐ vertical ☐
angled ☐ $\angle$ _____ °

Overall width of the system _____ mm

Drive centre distance a _____ mm $a_{\min}$ _____ mm $a_{\max}$ _____ mm

Allowance for tensioning - mm _____ + mm _____

Tension/guide pulleys: inside ☐
outside ☐

 d_d _____ mm d_a _____ mmSupporting pulleys V-pulleys ☐ Flat pulleys ☐Bearings plain ☐ ball ☐

Number _____ pieces

 d_d _____ mm d_a _____ mmSpacing t _____ piecesSupport rails flat ☐ V-grooved ☐

Material (e.g. steel, plastic) _____

Material to be conveyed

Type (e.g. concrete slabs) _____

Condition of the corners round ☐sharp ☐Conditions of the contact surface rough ☐smooth ☐Conveyed horizontally ☐ vertically ☐inclined ☐ $\angle$ _____ °downwards ☐ upwards ☐Dimensions $l \times w \times h$ (mm) _____ x _____ x _____Motion continuous ☐ cycled ☐collected ☐

Operating Conditions

Ambient temperature _____ °C minimum

_____ °C maximum

Exposure to oil ☐ (e.g. oil mist, droplets) _____water ☐ (e.g. spray) _____acid ☐ (type, concentration, temperature) _____dust ☐ (type) _____In the open air yes ☐no ☐


The space overleaf is provided for sketches of the drive arrangement.
Please include the dimensions of all the pulleys and idlers used in the
proposed design.



Notes on the proposed conveyor arrangement:




optibelt VB
Klassische Keilriemen
Classical V-belts



optibelt SK
Schmalkeilriemen
Wedge belts



optibelt RED POWER II
Hochleistungs-Schmalkeilriemen,
wartungsfrei
High performance wedge belts,
maintenance free



optibelt Super X-POWER M=5
Keilriemen, flankenoffen, formgezahnt
V-belts, raw edge, moulded cogged




optibelt KB
Kraftbänder
Kraftbands




optibelt KB RED POWER II
Hochleistungs-Kraftbänder
High performance kraftbands



optibelt KBX
Kraftbänder, flankenoffen
Kraftbands, raw edge




optibelt PKR
Endlose Keilriemen mit Auflage
Endless V-belts with special
top surfaces



optibelt SUPER VX
Breitkeilriemen, flankenoffen,
formgezahnt
Variable speed belts,
raw edge, moulded cogged




optibelt SUPER DVX
Doppel-Breitkeilriemen,
flankenoffen, formgezahnt
Double section variable speed
belts, raw edge, moulded cogged




optibelt ZR
Zahnflachriemen
Timing belts




optibelt OMEGA
Zahnflachriemen, wartungsfrei
Timing belts, service-free




optibelt OMEGA HL
optibelt OMEGA HP
Hochleistungs-Zahnflachriemen,
wartungsfrei
High performance timing belts,
maintenance free




optibelt HTD® D
Doppel-Zahnflachriemen
Double section timing belts



optibelt ALPHA
optibelt ALPHA linear/V
optibelt ALPHAflex
Zahnflachriemen aus Polyurethan
Polyurethane timing belts




optibelt ALPHA Spezial
Zahnflachriemen mit Nocken und
Beschichtungen
Timing belts with cleats and
back coverings




optibelt DK
Doppelkeilriemen
Double section V-belts




optimat OE
Endliche Keilriemen
DIN 2216, gelocht
Open-ended V-belt, punched



optibelt RR
Kunststoffrundriemen
Plastic round section
belting



optibelt RB
Rippenbänder
Ribbed belts



optibelt KK
Kunststoffkeilriemen
Plastic V-belt



optibelt KS
Keilrillenscheiben
V-grooved pulleys



optibelt ZRS
Zahnriemenscheiben
Timing belt pulleys



optibelt RBS
Rippenbandscheiben
Ribbed belt pulleys